

Fluid-o-Tech Syrup oscillating piston pumps




The Syrup version of the Fluid-o-Tech Mono oscillating piston pump is equipped with custom components, specifically designed to grant supreme performance and a high degree of compatibility with most of the syrups present in the market today with a viscosity up to 400 cSt.

The innovative sealing system, the new piston highly resistant to corrosion and mechanical wear and the improved precision of the flow regulator make of this pump a remarkable product.

The coil is made of self-extinguishing material with a class H insulation winding.

All the models are equipped with a noise suppression device which allows the pump to be installed in all those applications where low noise is a premium.

Shock absorbing supports are available for the quietest operation.

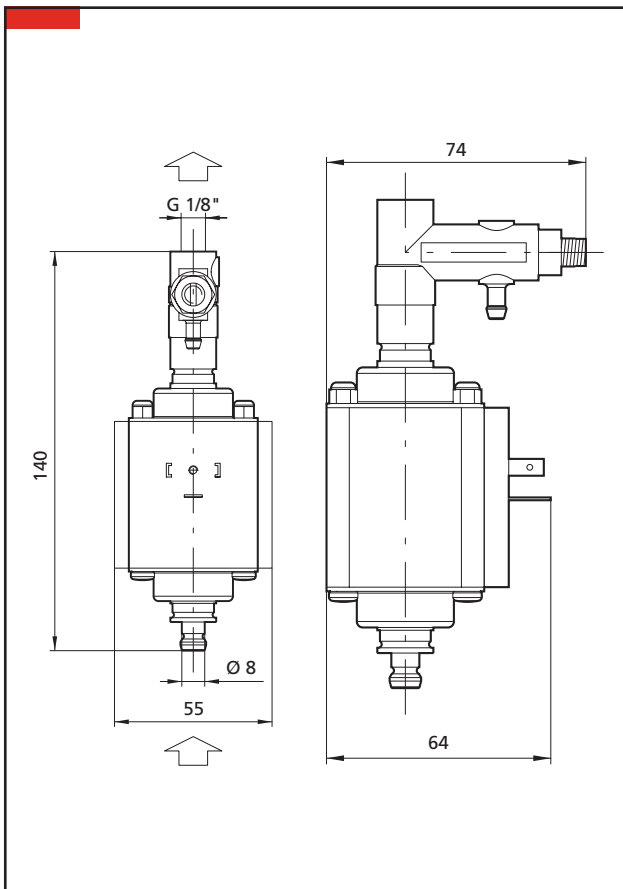

Main application

- Post-mix drink dispensers


Electrical characteristics

	File E164244 (S)	
	"IF" Coil	"IL" Coil
Voltage	120 V	230 V
Frequency	60 Hz	50 Hz
Power	70 W	70 W
Current	0,98 A	0,65 A

Hydraulic characteristics



- Self-priming
- Max viscosity: 400 Cst
- pH range: 6-8
- Max liquid temperature: 40 °C (104 °F)
- No dry running allowed

Wiring diagram

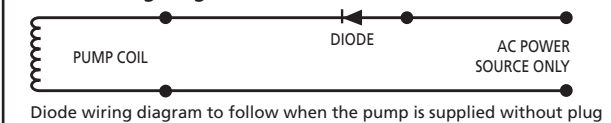

"IF" and "IL" coils are "UL" listed for 5' ON - 30" OFF without thermal protector

Fluid-o-Tech Syrup oscillating piston pumps

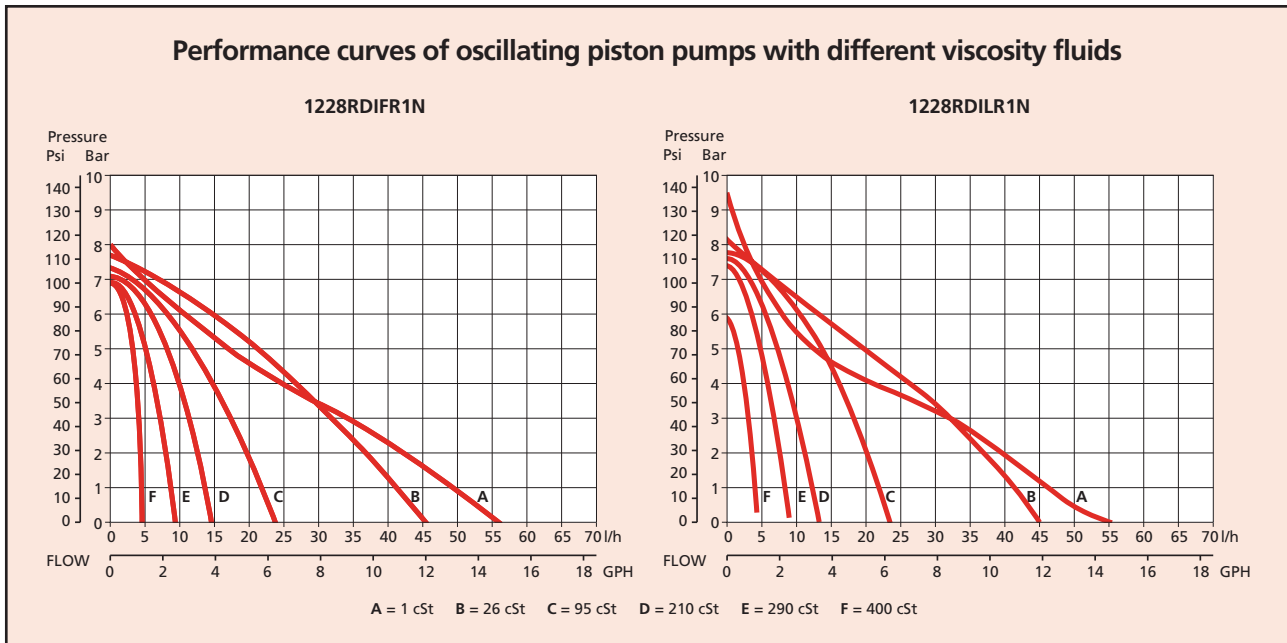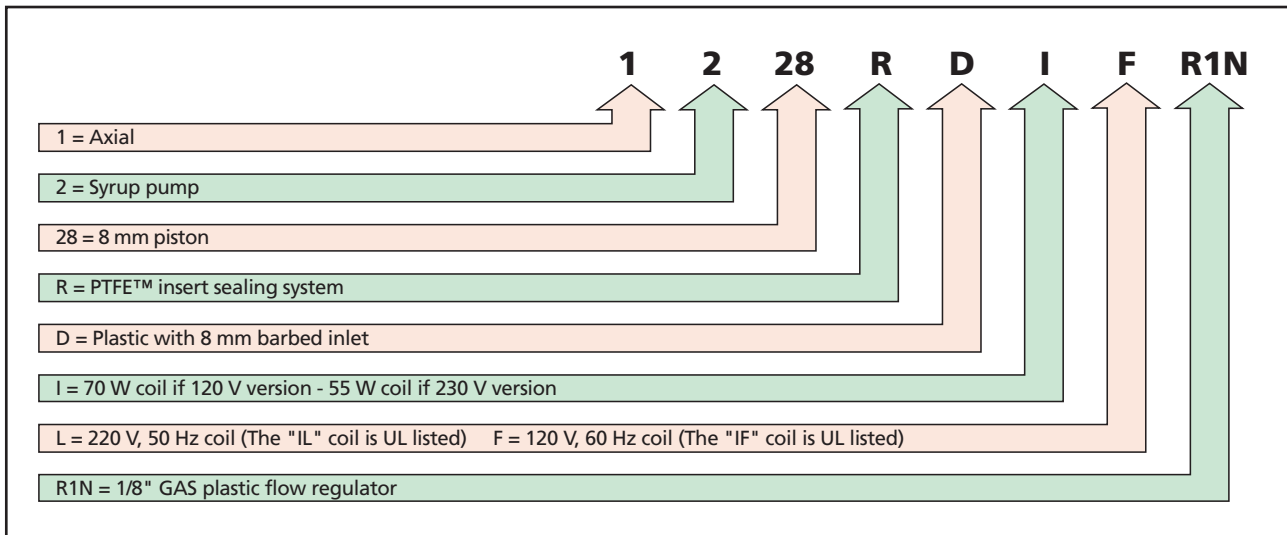

Note: Performance curves at 20 °C. Pump weight: 570 g (1,2 Lbs). Figures of flow are averages.

Fluid-o-Tech reserves the right to alter the specifications indicated in this catalogue at any time and without prior notice.

VIP-SYRUP – 03/09 Ed.

Fluid-o-Tech srl
Via Leonardo da Vinci, 40
20094 Corsico, Milano, Italy
Tel. +39 02 8917071
Fax +39 02 89170799

Fluid-o-Tech Int'l Inc.
161 Atwater St.,
Plantsville CT (USA) 06479
Tel. +1 (860) 276-9270
Fax +1 (860) 620-0193

Fluid-o-Tech Int'l Inc. Japan
203, 2-17-19, Ebara, Shinagawa
Tokyo 142-0063, Japan
Tel. +81 (0) (3) 3783-9660
Fax +81 (0) (3) 3783-9661

Fluid-o-Tech Asia (Beijing) Co., Ltd
Jingwei Industrial Zone,
Beifang Huairou, Beijing, 101400, PRC
Tel. +86 (0) (10) 61684650
Fax +86 (0) (10) 61684651