# SCOL

5

## MOTORPUMP<sup>TM</sup> — 2900 RPM


D050TCV184

6.23

### 50 HERTZ, 2 X 1.5 X 6.50 NPT **VWE 50**




#### MOTOR DIMENSIONS NEMA TCV FRAME 2900 RPM 3 PHASE TEFC HP FRAME AB 0 Н 1.5 145 12.28 7.19 5.25 4.18 2 5.25 145 13.15 7.19 4.18 3 4.94

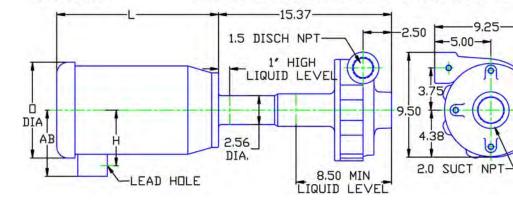

#### ALL DIMENSIONS IN INCHES.

DRAWING DEPCITS TCV184 5HP 3PHASE TEFC MOTOR

DRAWING REPRESENTS APPROXIMATE PUMP DIMENSIONS. AUTOCAD DRAWING TO SCALE AVAILABLE FROM FACTORY.

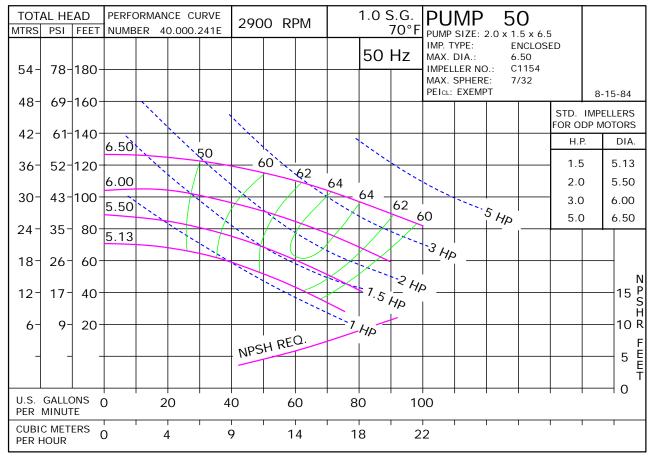

184 14.41 8.50 5.97 215 16.16 10.34 7.46 OPTIONAL MOUNTING PLATE MP11 H DIA (4) \_\_\_\_SPLIT ON CENTER LINE SCOT SCD 215 BORE Ø 11 SCD.

100S



D1040 D050TCV184 05003VWE

50

TCV

0502900

0502900TCV **VWE 50** 81.001.540 M19

### 50 Hertz Pump & Motor Data

A 3-phase 50 Hertz Motorpump<sup>™</sup> can be obtained in several ways. The most common options are listed below:

1. Most 60 Hz pumps available from Scot Pump can be operated on a 3-phase 50 Hz 190/380V power. However, when operated on 50 Hz power, the speed is reduced by approximately 20%, and a significant reduction in performance is realized. The charts below indicate these reductions in performance.

2. Pumps will produce the performance indicated in the performance curves when operated on 50 Hz power. The motors for these selections can be obtained through *derated 60 Hz motors* and *wound 50 Hz motors*.

Contact factory for 1 Phase applications.

### **Derated 60 Hz Motors**

The most common practice and readily available method of obtaining a 50 Hz motor is by using the next larger 60 Hz motor and derating it to the desired horsepower on 50 Hz. Many High Efficient motors can be operated on 50 HZ power without a reduction in horsepower. The motor manufacturers 60 HZ nameplate will remain intact. An "Alternate Motor Rating" nameplate indicating the reduced horsepower, RPM, volts, amps, and service factor will be affixed to the pump. In utilizing this practice, service factors may be derated to 1.0. The standard voltage is 190/380V and has a  $\pm 10\%$  voltage variation. In addition, 200/400V and 208/416V may be available. Please contact the factory for approval of the rating for your specific application.

### Wound 50 Hz Motors

Specially wound 50 Hz 220/380V six-lead Delta Wye motors are available. Most ratings offer a  $\pm$ 15% voltage variation. These motors are not normally a stock item and require an extended lead time.

The impeller and horsepower combination sized (taking the reduction in speed into consideration) may not be suitable for operation on 60 Hz power. The increase in speed, performance and load may overload the system and the electric motors. *Pumps sized for 50 Hz operation SHOULD NOT be tested on 60 Hz*.

60 Hz Pump on 50 Hz Power

No Impeller Change
--------------------

50 Hz	60 Hz	Factor
GPM =	GPM x	0.829
Head =	Head x	0.687
BHP =	HP x	0.569

To Size 60 Hz Pump	Using 50 Hz Data,
--------------------	-------------------


### **Obtain 60 Hz Data As Follows:**

60 Hz	50 Hz	Factor
GPM =	GPM x	1.2
Head =	Head x	1.45
BHP =	HP =	GPM x Head x SG of
DUL =	пP =	3960 x Eff

Change of Speed (RPM)		
	How Varies:	Examples
GPM	Directly	Double RPM = $(2)(RPM) = (2)(GPM)$ Triple RPM = $(3)(RPM) = (3)(GPM)$
Head	Square	Double RPM = $(2)(RPM) = (2)^2 = (2)(2) = (4)(Head)$ Triple RPM = $(3)(RPM) = (3)^2 = (3)(3) = (9)(Head)$
BHP	Cube	Double RPM = $(2)(RPM) = (2)^3 = (2)(2)(2) = (8)(BHP)$ Triple RPM = $(3)(RPM) = (3)^3 = (3)(3)(3) = (27)(BHP)$
Change of Impeller Diameter (Dia.)		

	How Varies:	Examples
GPM	Directly	Double Dia. = (2)(Dia.) = (2)(GPM)
GFIM	Directly	Triple Dia. = (3)(Dia.) = (3)(RPM)
Head	Square	Double Dia. = $(2)(Dia.) = (2)^2 = (2)(2) = (4)(Head)$
Tieau	Square	Triple Dia. = $(3)(Dia.) = (3)^2 = (3)(3) = (9)(Head)$
BHP	Cube	Double Dia. = $(2)(Dia.) = (2)^3 = (2)(2)(2) = (8)(BHP)$
DHF	Cube	Triple Dia. = $(3)(Dia.) = (3)^3 = (3)(3)(3) = (27)(BHP)$

VWE 50 • Iron • TCV Frame • 2900 RPM

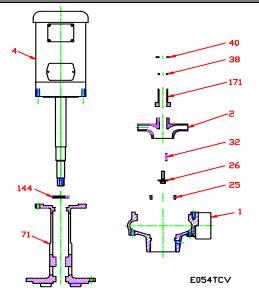


KEY NO.	. PART NAME SPEC SERIES‡		SERIES‡
		3190	3435
		OLD STYLE	PRESENT STYLE
1+	CASE, IRON, 2 x 1.5 NPT		).257X1
2	IMPELLER, 7/8" KEYED ENCLOSED, SF	PECIFY DIAMETE	R:
2	IRON		00.832
4	MOTOR, TCV140	See 60	HZ Chart
25	WEAR RING, STEEL	103.0	00.155
26*	IMPELLER RETAINER, STAINLESS		00.163A
32*	KEY, STAINLESS	† 102.0	000.102
38*	O-RING, SHAFT, VITON		† 116.000.105
40*	FLINGER, STAINLESS		† 104.000.165A
71	ADAPTER, IRON	132.000.291	† 132.000.291B
144*	LIP SEAL	† 101.0	000.244
171*	THROTTLE BUSHING, STEEL	110.000.348	† 110.000.348C
	REPAIR KIT	118.000.546	118.000.628
	RETROFIT KIT		118.000.625
	CONVERTS OLD STYLE TO PRESENT		
	MOUNTING PLATE MP11: (not shown)	118.0	00.329
	MOUNTING PLATE (2 REQ'D)	132.0	00.292
	CAP SCREW (2 REQ'D)	105.0	00.457
	WASHER (2 REQ'D)	137.0	00.697
	NUT (2 REQ'D)		00.122
* DENOTE	ES COMPONENTS INCLUDED IN REPAIL	R KIT.	
	ES STEEL WEAR RING.		
† DENOTE	S ITEMS INCLUDED IN RETROFIT KIT.		
‡ SPEC SE	ERIES 3190 WAS MANUFACTURED FRC	OM 1984 THROUG	H 01/13/04.
SPEC SEF	RIES 3435 IS THE CURRENT CONSTRUC	CTION AS OF 01/1	4/04.

F15

P0502900TCV

### VWE 50 • Iron • TCV Frame • 2900 RPM

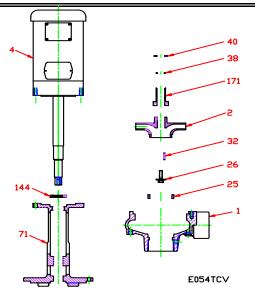

CONSTRUCTION OPTIONS		
KEY	PART NAME	CAST IRON
1	Case	Iron
2	Impeller	Iron
25	Wear Ring	Steel
26	Impeller Retaining Assembly	Stainless
32	Key	Stainless
38	O-ring, Shaft	Viton
40	Flinger	Stainless
71	Adapter	Iron
144	Lip Seal	BUNA
171	Throttle Bushing	Steel
NS	Mounting Plate MP11: (not shown)	Iron

E054TCV E15

C0502900TCV