



Energy Efficient Design

Cast Iron/Zinc

Sump Pump



Cast Iron Base

Provides strength and durability

Corrosion Resistant Zinc Body

Dissipates heat quickly and extends motor life

Energy Efficient Motor

Saves operating costs

Stainless Steel Fasteners and Hardware

Superior quality

Quadra Seal™ Technology

Provides superior motor protection over single seal designs

Smooth Flow Hydraulics™

Delivers high performance for demanding applications

Vertical Float Switch

Operates in 10" basins or larger

1/2 HP 4700 GPH
FPCI5050


1/3 HP 4200 GPH
FPCI3350

PERFORMANCE (GPH)							FLOAT SWITCH		SOLIDS HANDLING
DISCHARGE HEIGHT ABOVE PUMPING LEVEL	0'	5'	10'	15'	20'	MAX. LIFT	ON	OFF	
FPCI5050	4,700	4,200	3,540	2,820	1,800	24'	7.5"	3"	1/4"
FPCI3350	4,200	3,660	3,000	2,160	960	22	7.5"	3"	1/4"

MODEL	WARRANTY	UPC	CARTON DIMENSIONS	PALLET QTY.	WEIGHT
FPCI5050	2 YEAR	022315368439	7.63" x 7.63" x 14.25"	90	14.6 LBS.
FPCI3350	2 YEAR	022315358133	7.63" x 7.63" x 14.25"	90	14.6 LBS

Includes: 1 1/2" NPT discharge, 8' grounded power cord, piggyback-style switch for automatic or manual operation, detailed owner's manual

Check Valve replacement is recommended

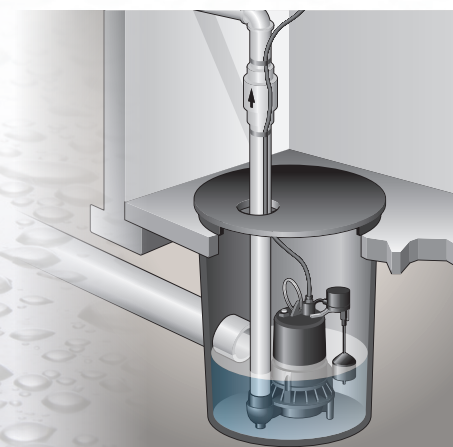

293 Wright Street, Delavan, WI 53115
For Questions or Installation Instructions:
www.flotecwater.com 1-800-365-6832