


15700 Series Magnetic Drive Pump **Ask us about available OEM options**

Specifications	
Flow Rates	Max Range: 35 gpm
	Max Head: 53 ft
	Max Sys. Pressure: 75 psi
Fluid Temp. Max	203°F (95°C)
Materials in contact with solution / OEM options	
Body	Ryton®
Impeller	Ryton®
Impeller Bearings	Resin Impregnated Carbon
Pump Shaft	Ceramic
Thrust Bearings	Ceramic
O-Rings (Elastomers)	<ul style="list-style-type: none"> • EPT/EPDM • Viton®/Fluoroelastomer • Nitrile • Neoprene • Silicone • Kel-F®
Motor specifications / OEM options	
Volts	115/230
Hz	50/60
Amps	6.4/3.2
Motor type	<ul style="list-style-type: none"> • Capacitor Start • Ball Bearing • Thermally Protected
Shell	Open Drip Proof
Approx. weight	18.3 lbs
Features	
Corrosion Resistant	Dry run capability
Hydraulically efficient	Quiet operation
No shaft seals	Flexible mounting and body discharge positions
Low current draw and heat rise	NSF certified models available



Dimensions in Inches
 (Dimensions in Millimeters)

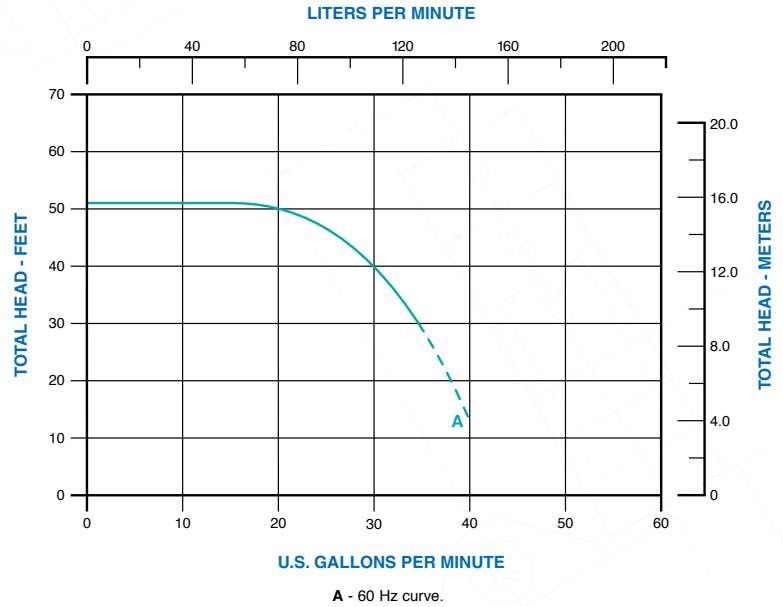