

T80 Series Model T8045

Maximum Flow Rate: 45 gpm (170.4 l/min)

Maximum Pressure: 3000 psi (207 bar)

Hydra-Cell[®]
Seal-less Pumps



T8045 with Nickel Aluminum
Bronze pump head

- Seal-less design eliminates leaks, hazards and the expense associated with seals and packing
- Low NPSH requirements allow for operation with a vacuum condition on the suction - positive suction pressure is not necessary
- Can operate with a closed or blocked suction line and run dry indefinitely without damage, eliminating downtime and repair costs
- Unique diaphragm design handles more abrasives with less wear than gear, screw or plunger pumps
- Hydraulically balanced diaphragms to handle high pressures with low stress
- Lower energy costs than centrifugal pumps
- Rugged construction for long life with minimal maintenance
- Compact design and double-ended shaft provide a variety of installation options



T80 Series Model T8045 Performance

Capacities

Flow				Pressure	
Model	Max. Input rpm	Max. Flow @ 3000 psi (207 bar)		Maximum Inlet Pressure	Maximum Discharge Pressure
		gpm	l/min		
T8045	450	45.0	170.4	500 psi (34 bar)	3000 psi (207 bar)

Consult factory when operating below 20 gpm (75.7 l/min).

Maximum Flow at Designated Pressure

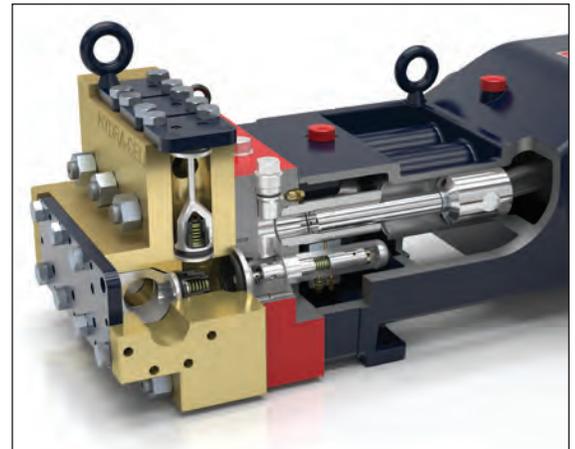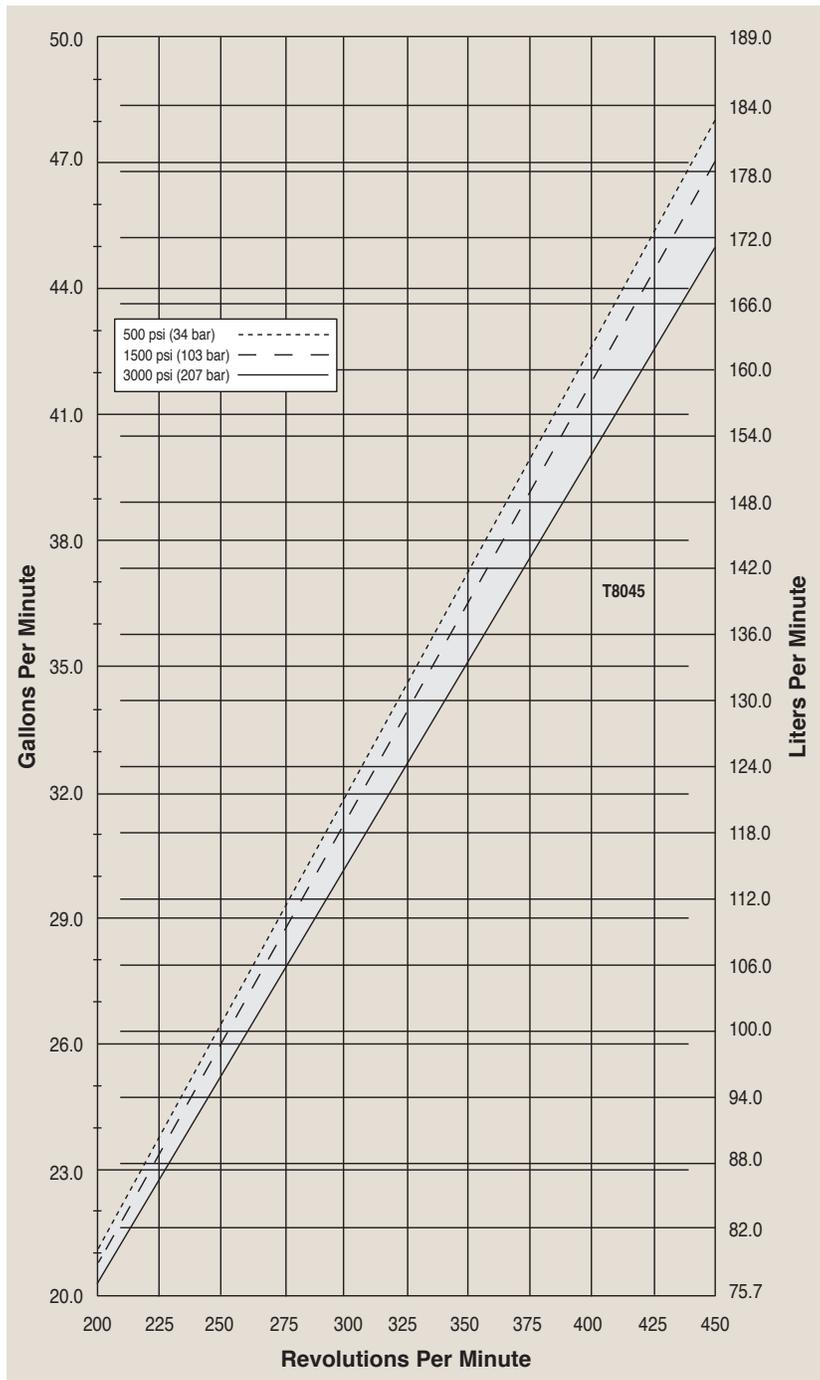

T Series pumps feature the Hydra-Cell seal-less design, eliminating clean-up costs from leaking seals or packing and protecting operators from dangerous fluids such as those containing hydrogen sulfide.

Due to Wanner Engineering continuous improvement practices, performance data and specifications may change without notice.

T80 Series Model T8045 Specifications

Flow Capacities @3000 psi (207 bar)

Model	rpm	gpm	l/min
T8045	450	45.0	170.4

Delivery

Pressure psi (bar)	gal/rev	liters/rev
500 (34)	0.107	0.406
1500 (103)	0.105	0.397
3000 (207)	0.101	0.384

rpm

Maximum:	450
Minimum:	200 Consult factory for speeds less than 200 rpm

Maximum Discharge Pressure

Metallic Heads:	3000 psi (207 bar)
-----------------	--------------------

Maximum Inlet Pressure 500 psi (34 bar)

Operating Temperature

Maximum:	180 °F (82.2 °C)
Minimum:	40 °F (4.4 °C)

Consult factory for temperatures outside this range

Maximum Solids Size 800 microns

Input Shaft Left or Right Side

Inlet Ports 3-1/2 inch Class 300 RF ANSI Flange or 2-1/2 inch NPT

Discharge Ports 1-1/2 inch Class 2500 RJ ANSI Flange or 1-1/2 inch NPT

Shaft Diameter 3 inch (76.2 mm)

Shaft Rotation Reverse (bi-directional)

Oil Capacity 18 US quarts (17 liters) 10W30 standard-duty oil

Weight


Metallic Heads:	1100 lbs. (499 kg)
-----------------	--------------------

Fluid End Materials


Manifold:	Nickel Aluminum Bronze (NAB) 316L Stainless Steel
Diaphragm/Elastomers:	FKM Buna-N
Diaphragm Follower Screw:	316 Stainless Steel
Valve Spring Retainer:	Polypropylene
Check Valve Spring:	Elgiloy
Valve Disc/Seat :	Tungsten Carbide 17-4 Stainless Steel Hastelloy C
Outlet Valve Retainer:	316 Stainless Steel
Plug-Outlet Valve Port:	316 Stainless Steel
Inlet Valve Retainer:	316 Stainless Steel

Power End Materials

Crankshaft:	Forged Q&T Alloy Steel
Connecting Rods:	Ductile Iron
Crossheads:	12L14 Steel
Crankcase:	Ductile Iron
Bearings:	Spherical Roller/Journal (main) Steel Backed Babbitt (crankpin) Bronze (wristpin)

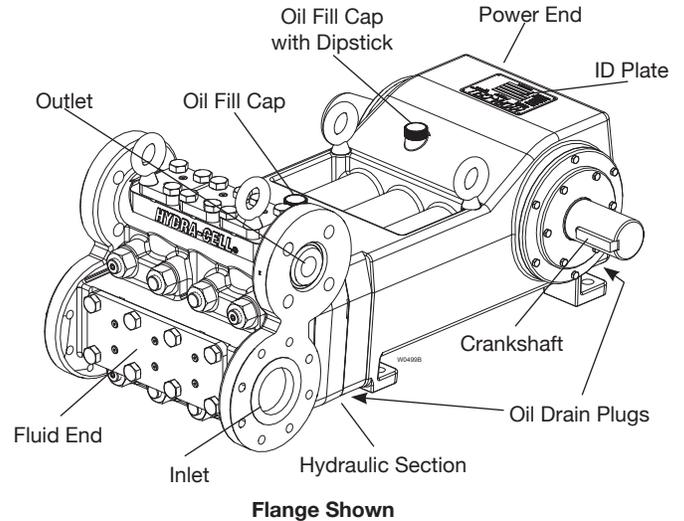

Net Positive Suction Head (NPSHr)

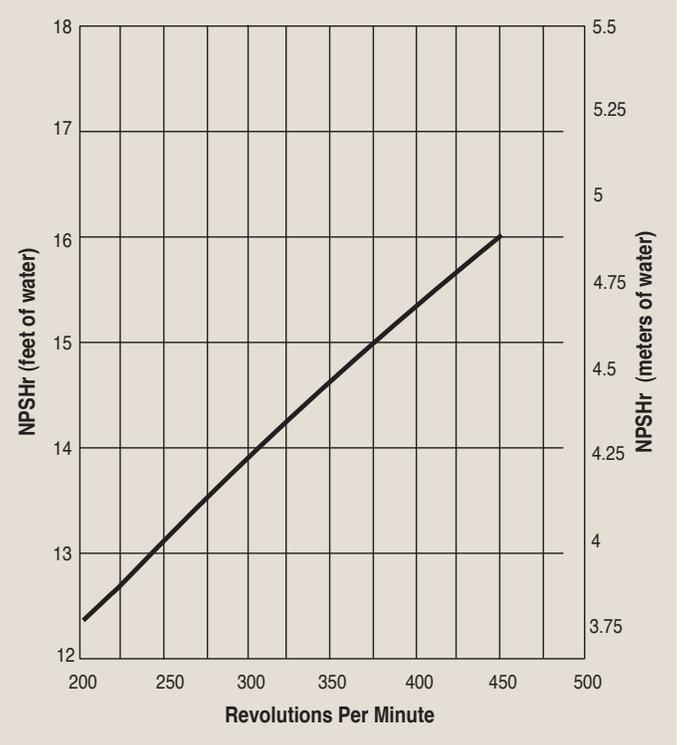

Calculating Required Horsepower (kW)*

$$\frac{\text{gpm} \times \text{psi}}{1,460} = \text{electric motor hp}^*$$

$$\frac{\text{lpm} \times \text{bar}}{511} = \text{electric motor kW}^*$$


* hp (kW) is required application power.

Attention!


When sizing motors with variable speed drives (VFD): It is very important to select a motor and a VFD rated for constant torque inverter duty service and that the motor is rated to meet the torque requirements of the pump throughout desired speed range.

T80 Series Model T8045 Dimensions

Model T8045 Threaded Version inches (mm)

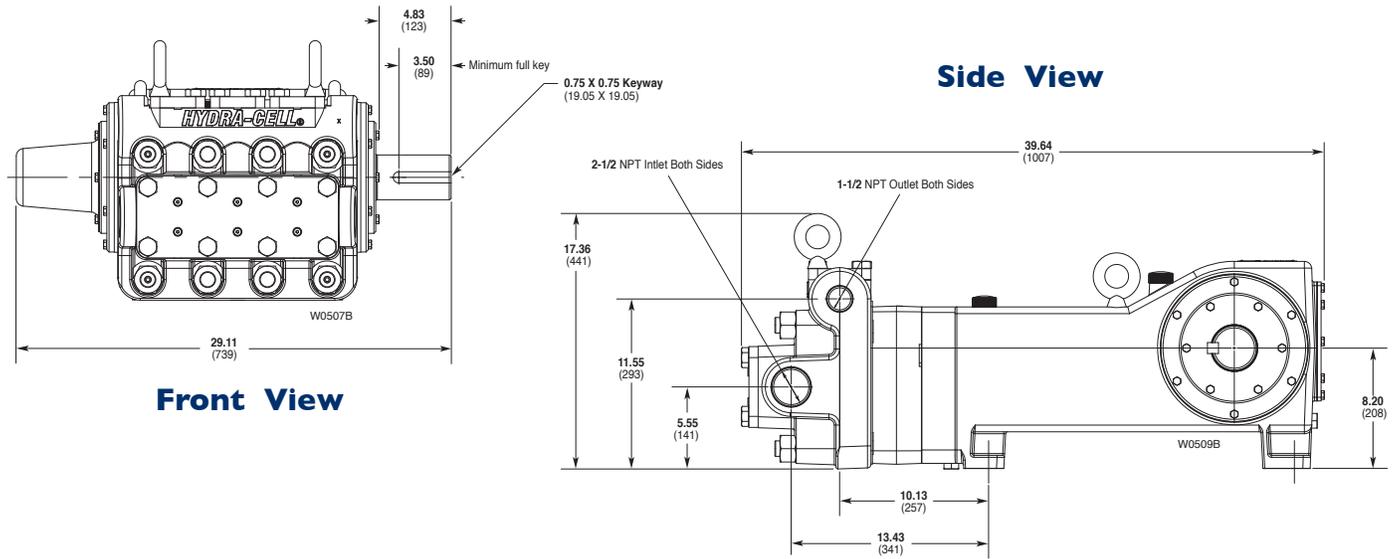

Model T8045 Flanged Version inches (mm)

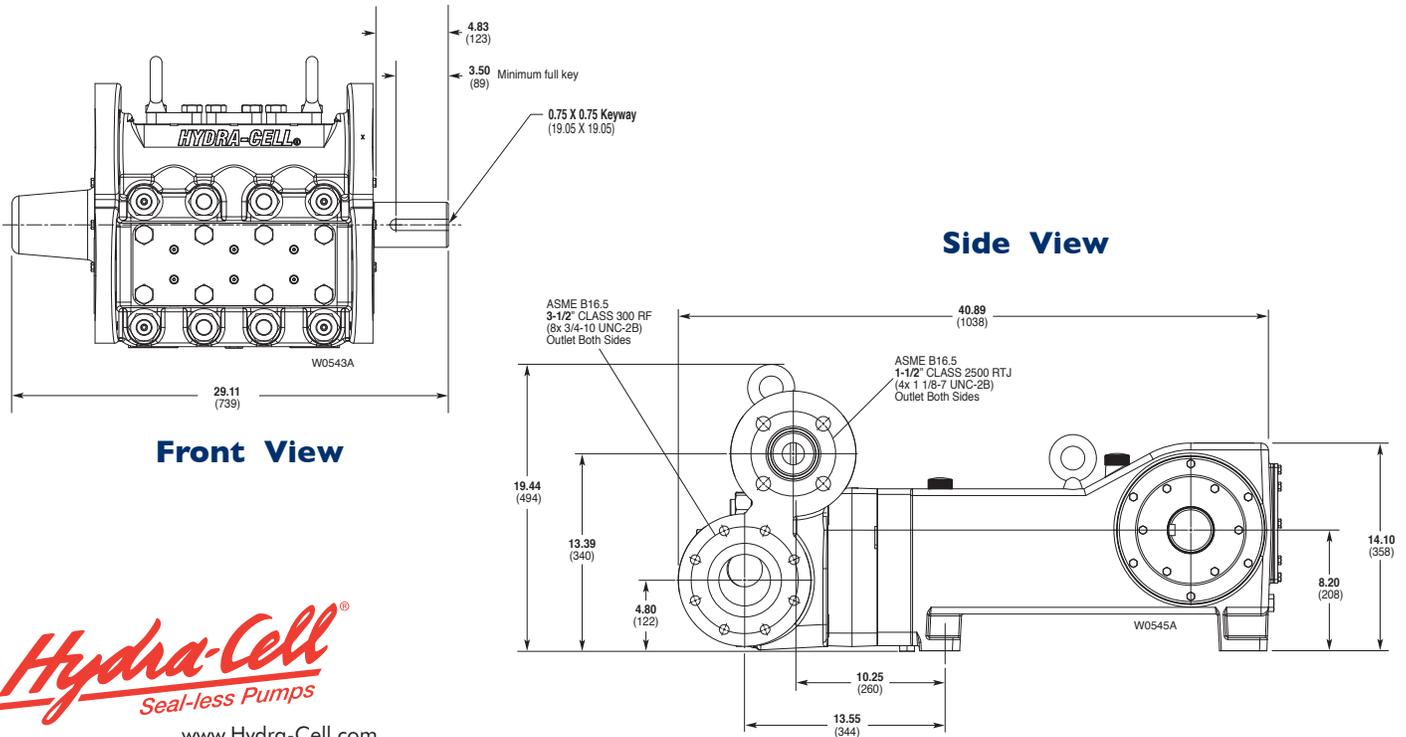

Hydra-Cell
Seal-less Pumps

www.Hydra-Cell.com

Wanner Engineering, Inc.

World Headquarters & Manufacturing

1204 Chestnut Avenue

Minneapolis, MN 55403 USA

Tel: (612) 332-5681 • FAX: (612) 332-6937

Toll Free FAX (USA only) (800) 332-6812

Email: sales@wannereng.com

www.hydra-cell.com

Wanner International Ltd.

8 & 9 Fleet Business Park

Sandy Lane, Church Crookham,

Hampshire GU52 8BF England

Tel: +44 (0) 1252 816847

FAX Tel: +44 (0) 1252 629242

Email: sales@wannerint.com

www.hydra-cell.eu

Wanner Pumps Ltd.

Flat A, 21 F

Chatham Commercial Building

399 Chatham Road North

Hunghom, Kowloon, Hong Kong

Tel: (852) 3428-6534

FAX: (852) 3188-9145

Email: sales@wannerpumps.com