




IWAKI WALCHEM Corporation

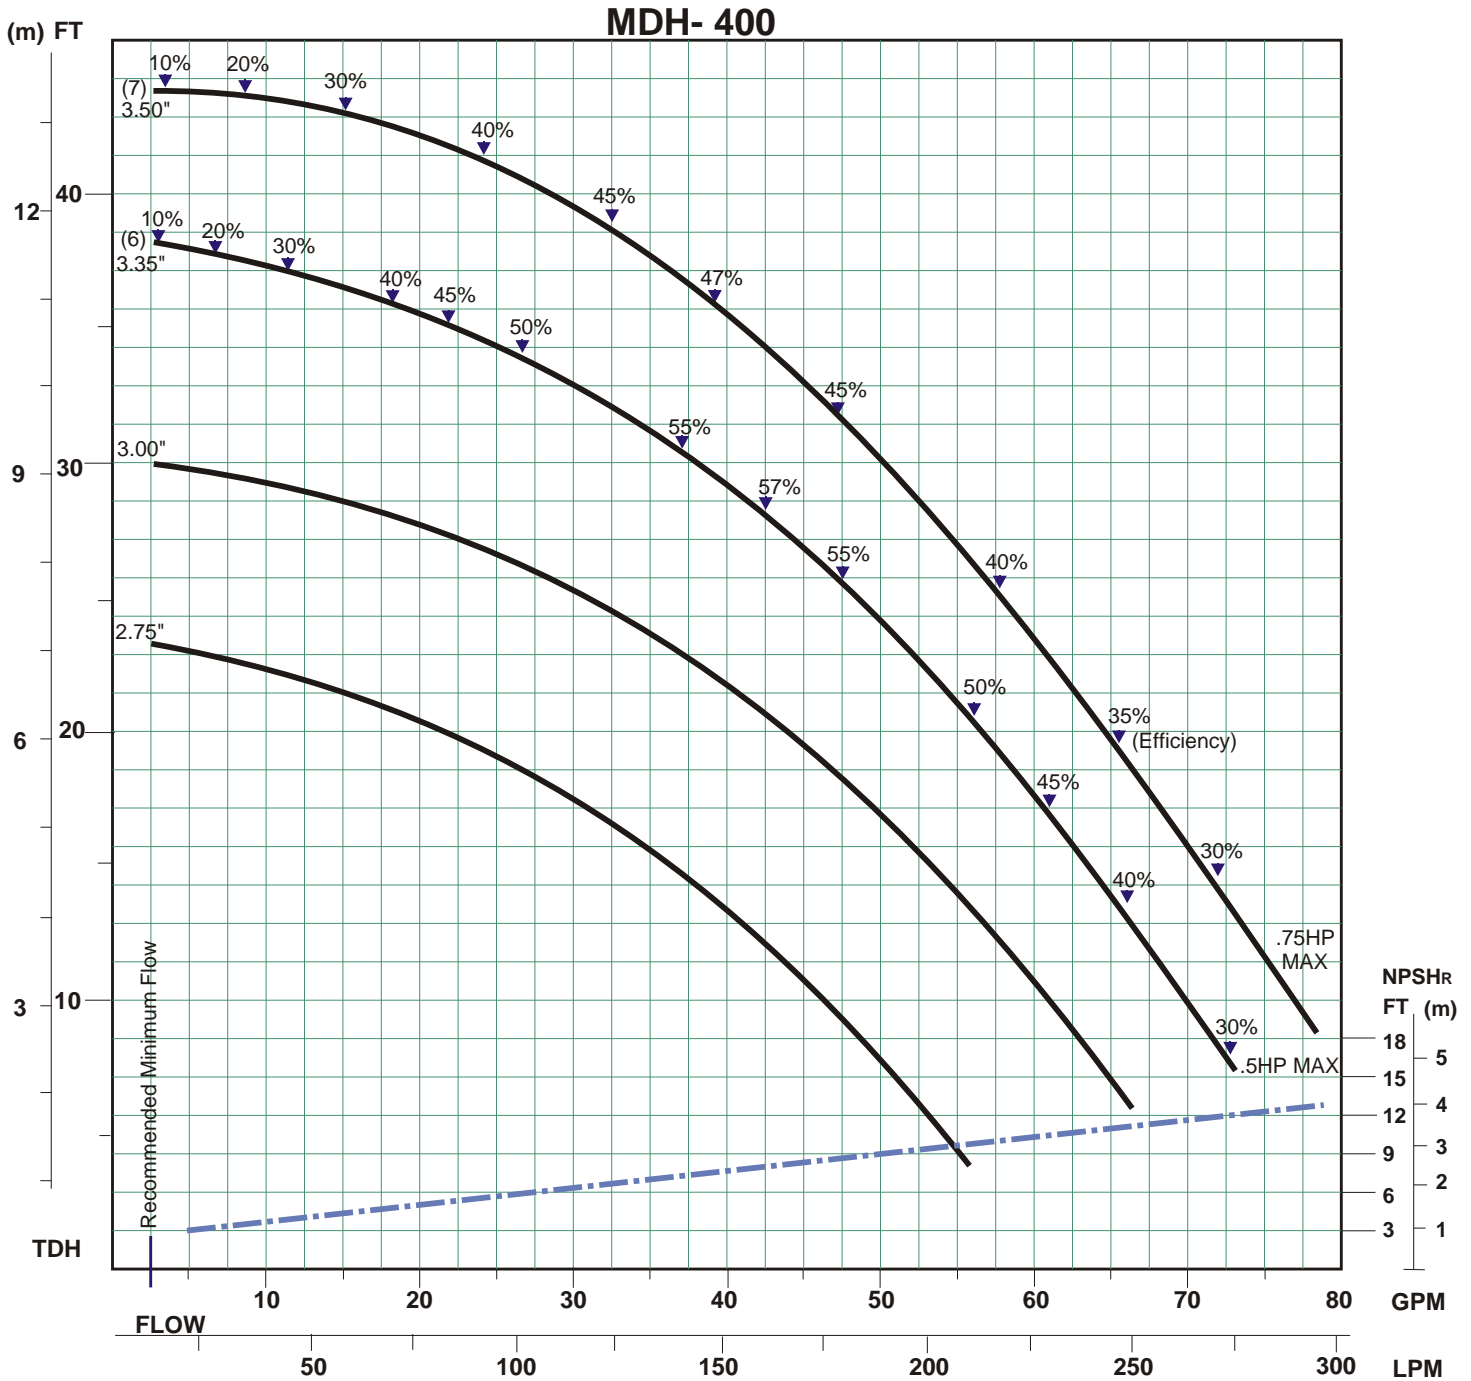


Curve No: IP20161.B	Max. Impeller Dia.: (7) 3.50" / (6) 3.35"	Suction: 1½" NPT
RPM: 3440	Min. Impeller Dia.: (7) 3.36" / (6) 2.75"	Discharge: 1½" NPT
Date:	Approved:	No. of Vanes: 6

For performance curves below (6) 3.35", 0.5 HP is required. For curves above (6) 3.35", 0.75 HP is required. Performance based on water at 70°F (21°C). Fluids with specific gravities other than 1.0 should be reviewed by the factory.



IWAKI WALCHEM Corporation

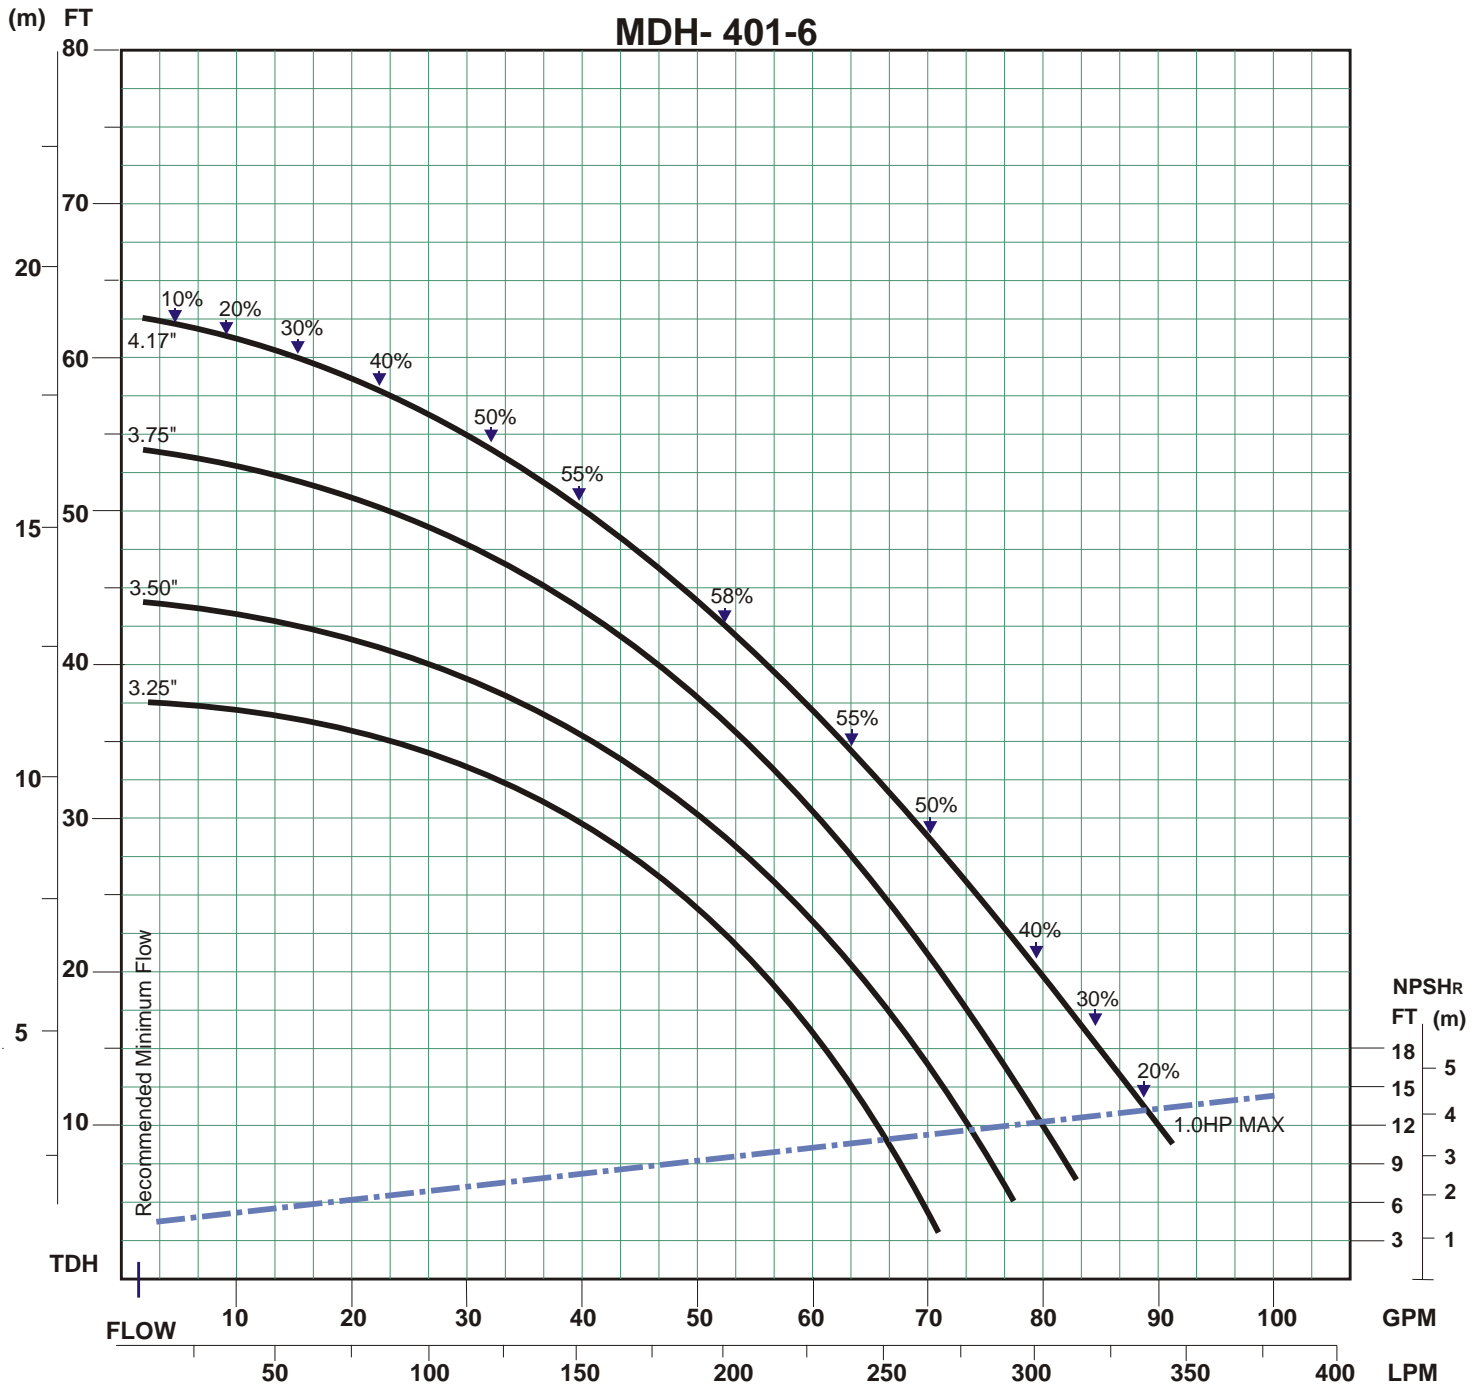


Curve No: IP20163.C	Max. Impeller Dia.: 4.17"	Suction: 1½" NPT
RPM: 3440	Min. Impeller Dia.: 3.25"	Discharge: 1½" NPT
Date:	Approved:	No. of Vanes: 6

Performance based on water at 70°F (21°C).
 Fluids with specific gravities other than 1.0 should be reviewed by the factory.



IWAKI WALCHEM Corporation

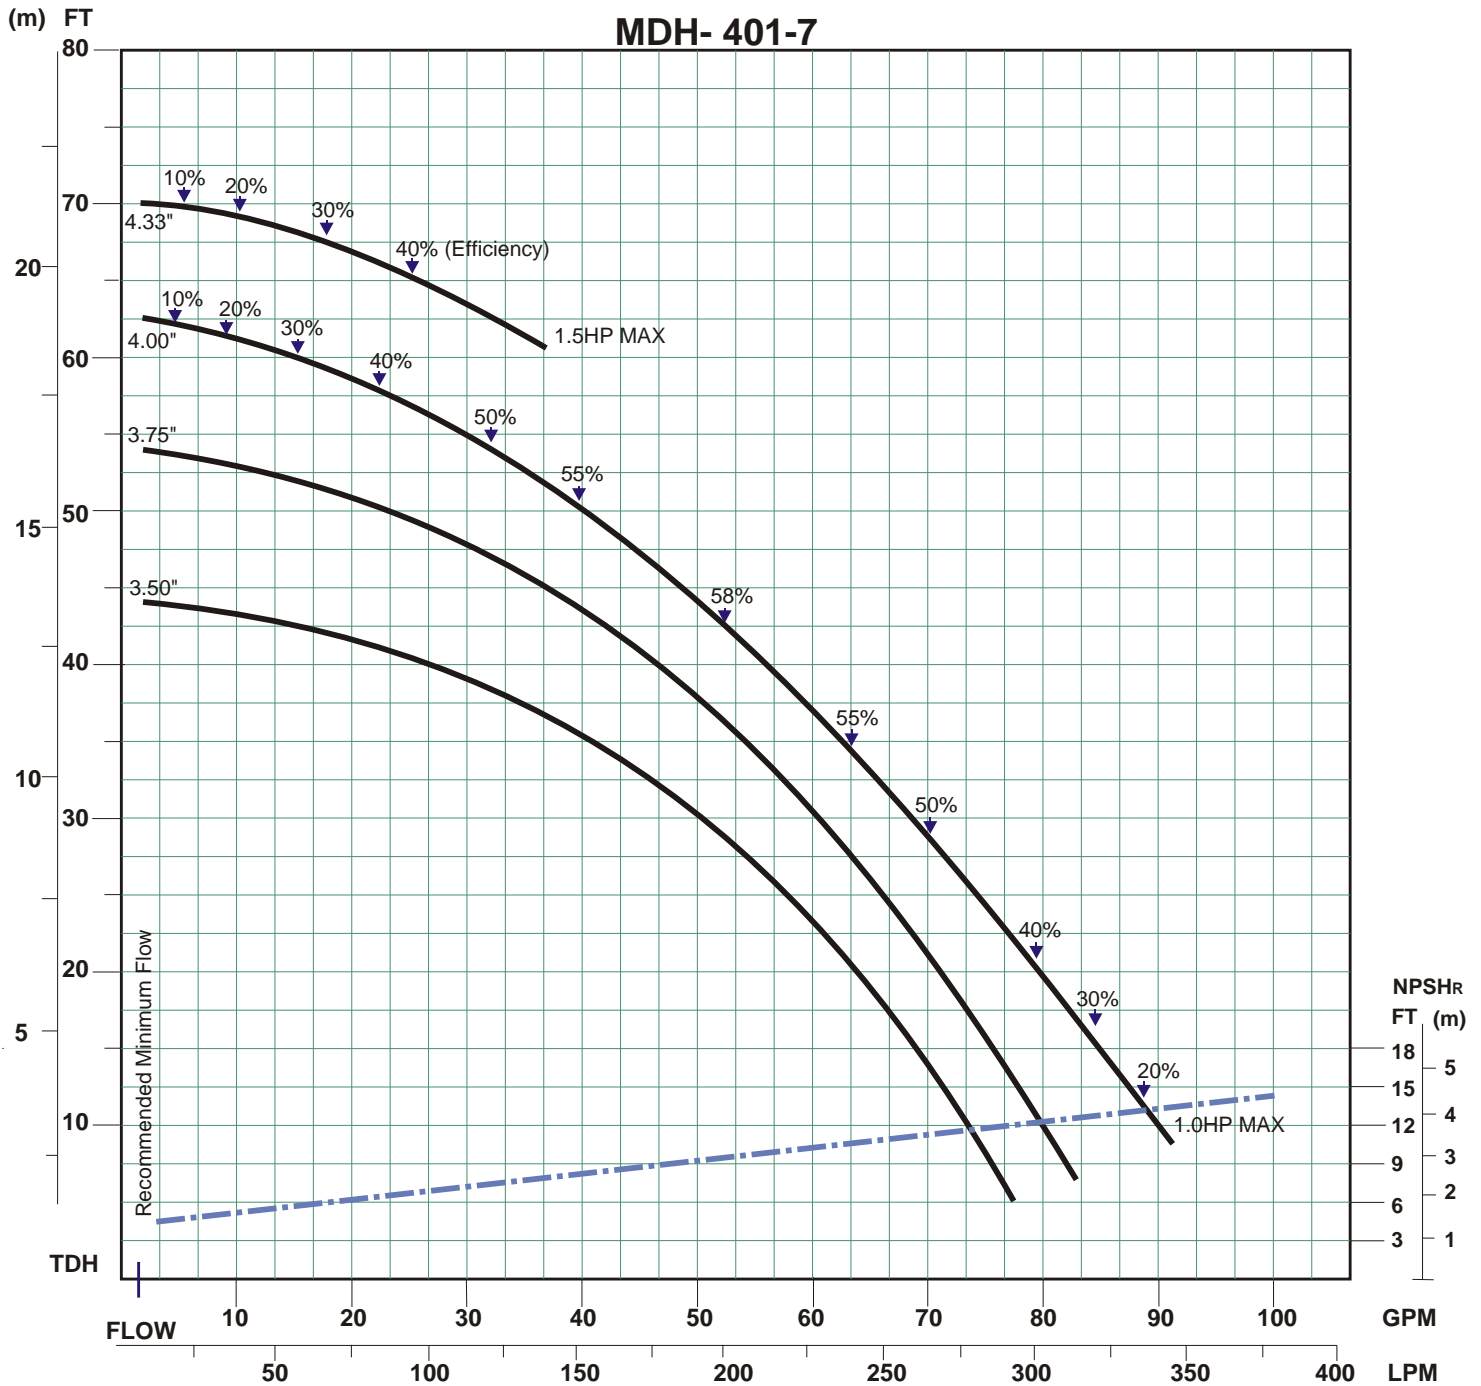

Curve No: IP20394.A	Max. Impeller Dia.: 4.24"	Suction: 1½" NPT
RPM: 3440	Min. Impeller Dia.: 3.50"	Discharge: 1½" NPT
Date:	Approved:	No. of Vanes: 6


Performance based on water at 70°F (21°C).
 Fluids with specific gravities other than 1.0 should be reviewed by the factory.



IWAKI WALCHEM Corporation

(m) FT

MDH-422

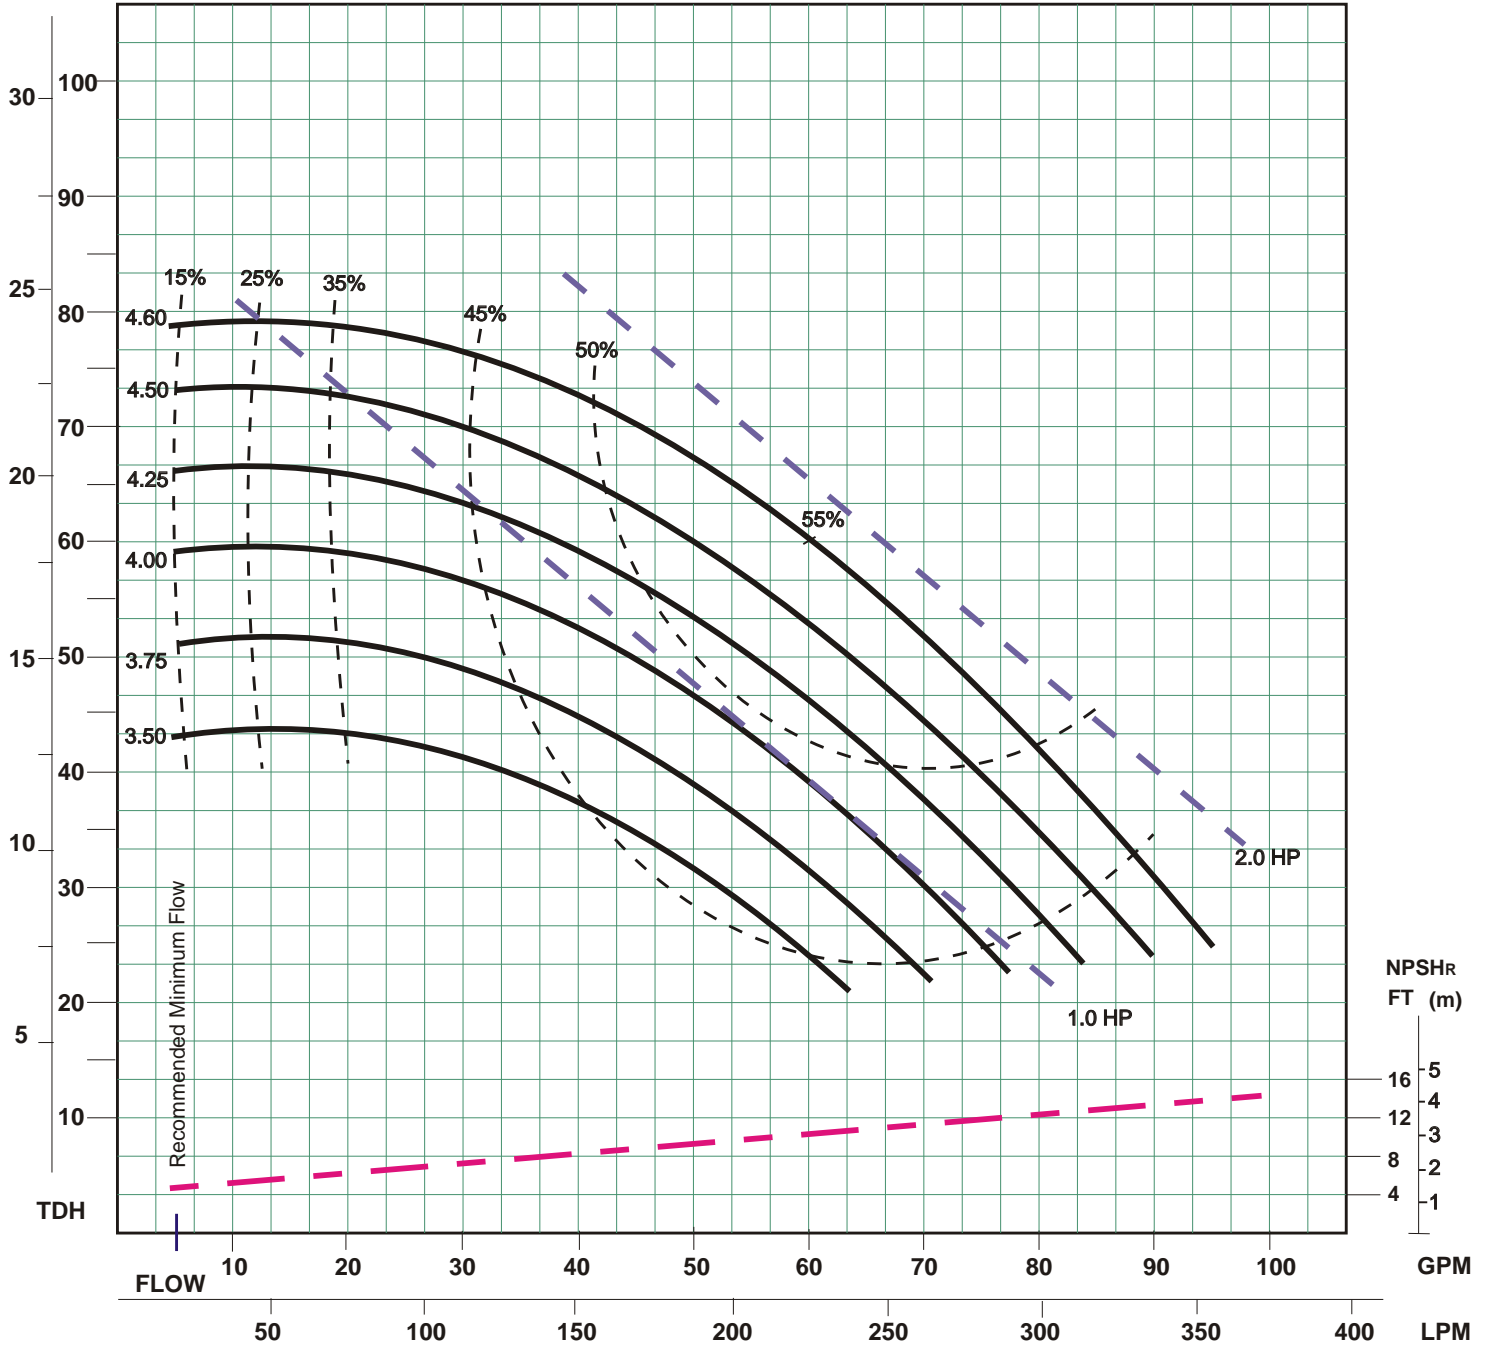

Curve No: IP20325.A	Max. Impeller Dia.: (6) 4.60"	Suction: 2" NPT
RPM: 3500	No. of Vanes: 6	Discharge: 1½" NPT
Date:	Approved:	


Performance based on water at 70°F (21°C).
 Fluids with specific gravities other than 1.0 should be reviewed by the factory.



IWAKI WALCHEM Corporation

(m) FT

MDH-423

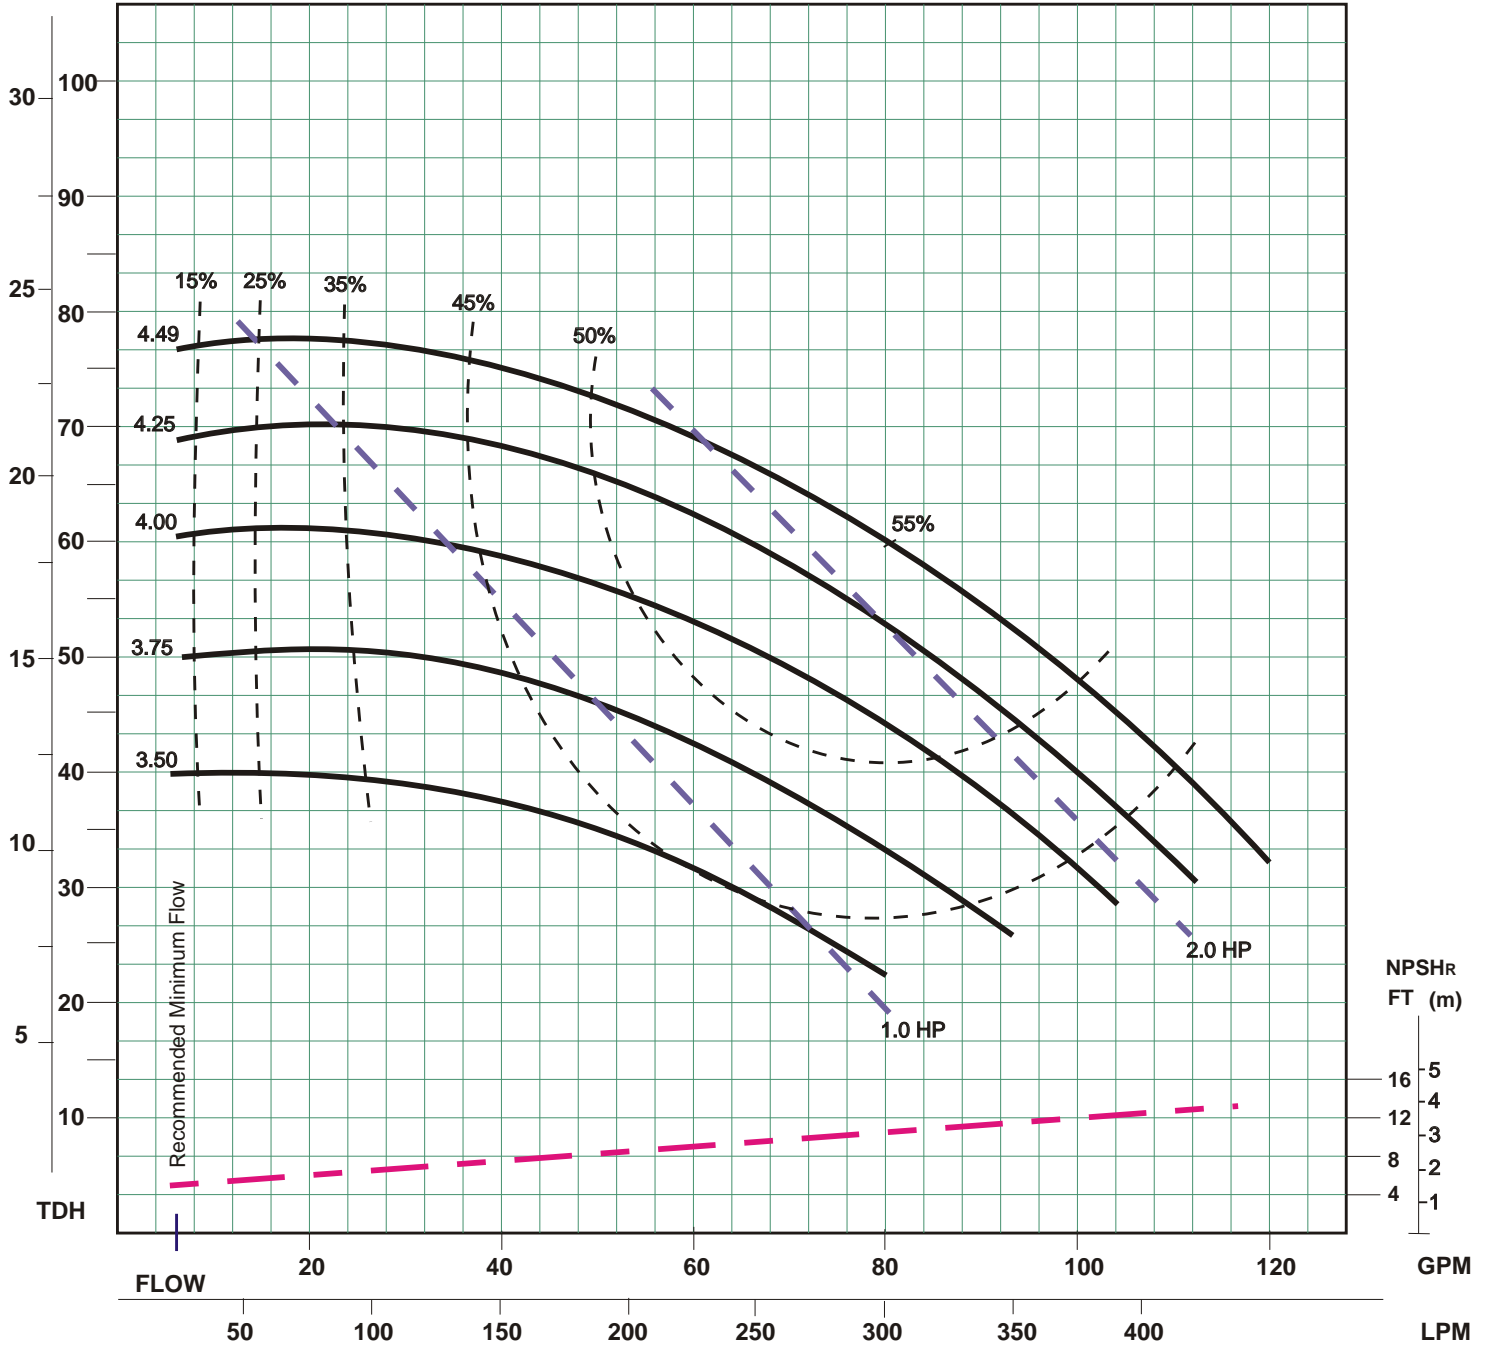


Curve No: IP20326.A	Max. Impeller Dia.: (6) 4.49"	Suction: 2" NPT
RPM: 3500	No. of Vanes: 6	Discharge: 1½" NPT
Date:	Approved:	

Performance based on water at 70°F (21°C).
 Fluids with specific gravities other than 1.0 should be reviewed by the factory.



(m) FT

MDH-425

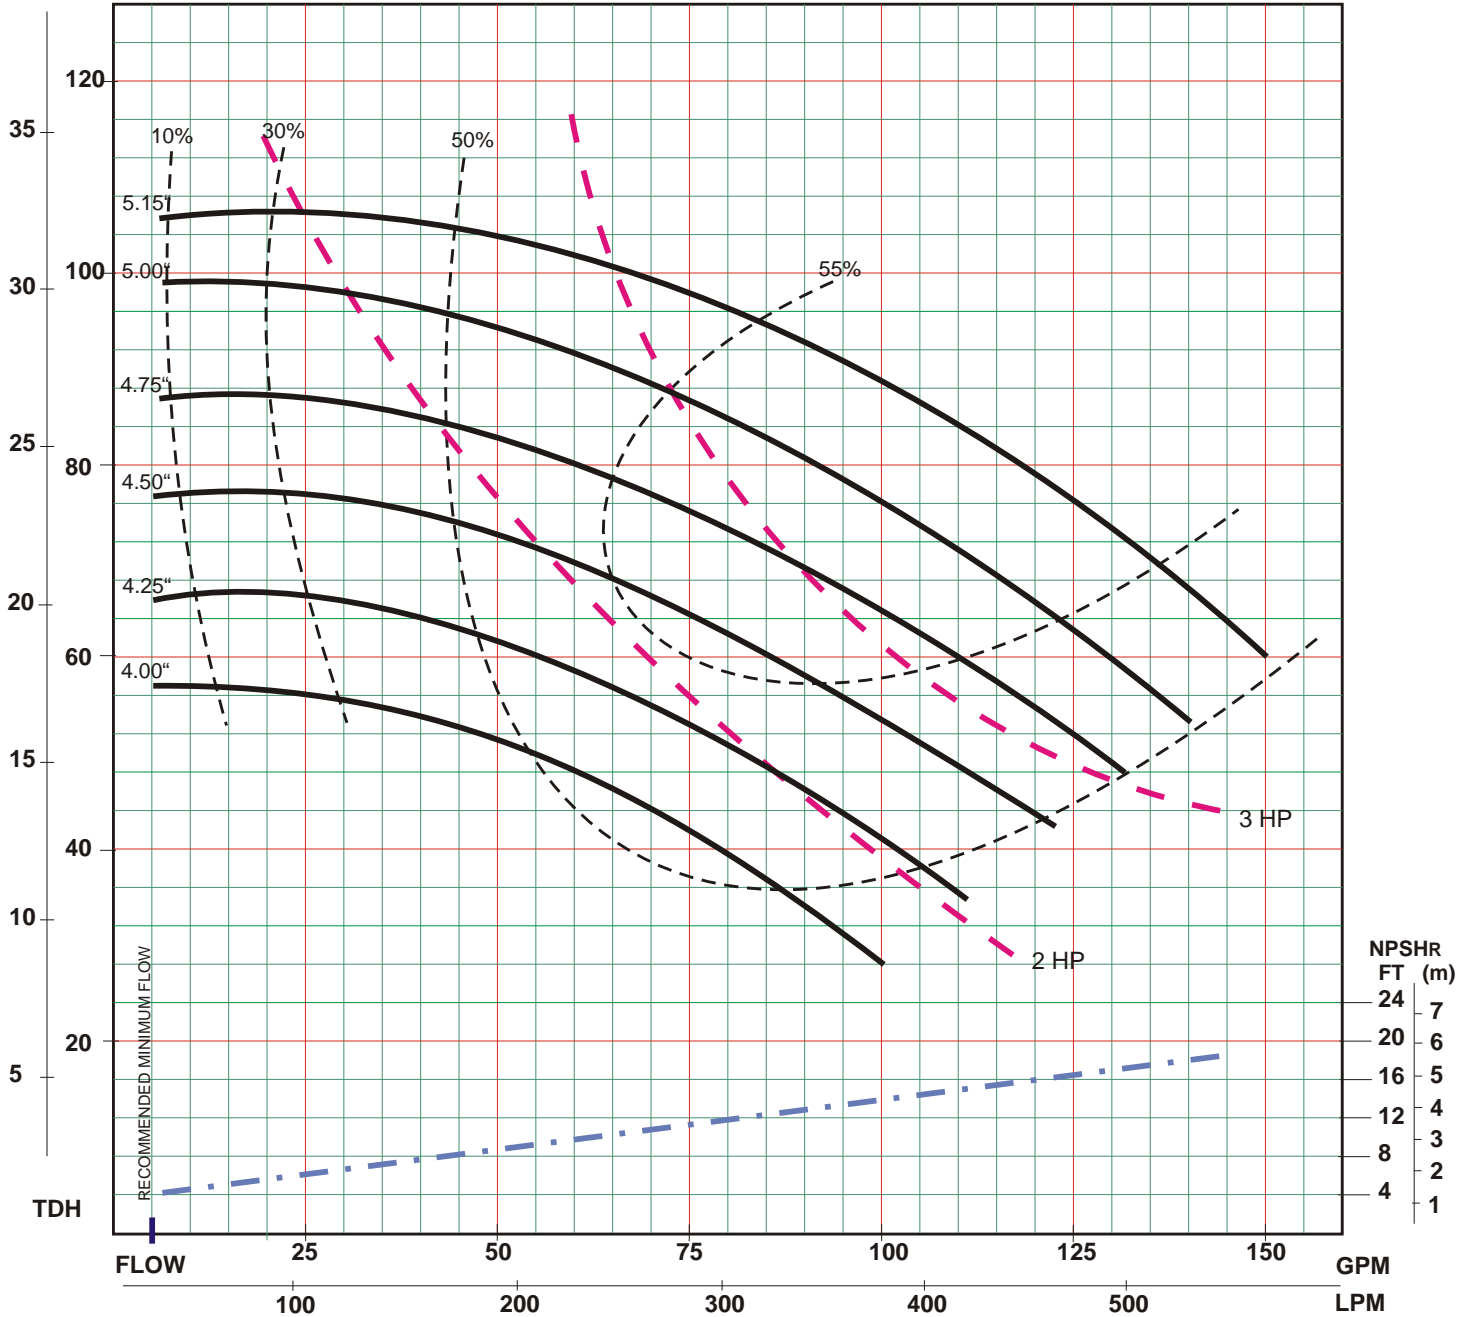

Curve No: IP20340.A	Max. Impeller Dia.: (6) 5.15"	Suction: 2.0" NPT
RPM: 3440	No. of Vane: 6	Discharge: 1.5" NPT
Date: 4/10/98	Approved:	