



Universal Switch Replacement Kit



Turn off power before servicing pump. Open faucets to relieve system pressure.

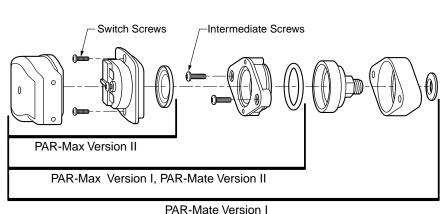



SWITCH REPLACEMENT

Jabsco Universal Switch Replacement Kit fits all previous models of PAR-Max and PAR-Mate pumps. Improved switch design is completely sealed for protection in Marine environments and long life. Switch cut-off pressure is factory set.

Turn off power before servicing pump. Open faucets to relieve system pressure. If pump is located below the supply tank, insure that the supply tank valve is closed to prevent water leakage during service.

Disconnect wires from terminals and remove old pressure switch from pump. Determine pump model

and vintage from the table and diagram above. Reassemble parts for your model in sequence shown. Tighten intermediate screws (if used) to 15 inchpounds of torque. Tighten switch screws to 7 inchpounds of torque. Replace terminals with new terminals supplied in this kit.

Close all faucets. Turn power on to pump. Open faucet to bleed trapped air from system. When bubbles stop, close faucet and confirm that pump turns off automatically. Check for leaks and proper operation.

Jabsco



U.S.A. Jabsco Cape Ann Industrial Park Gloucester, MA 01930 Tel: 978.281.0440 Fax: 978.283.2619 UNITED KINGDOM
Jabsco
Bingley Road, Hoddesdon
Hertfordshire EN11 OBU
Tel: +44 (0) 1992 450145
Fax: +44 (0) 1992 467132

CANADA Fluid Products Canada 55 Royal Road Guelph, Ontario N1H 1T1 Tel: (519) 821-1900 Fax: (519) 821-2569 THE PRODUCTS DESCRIBED HEREIN ARE SUBJECT TO THE JABSCO ONE-YEAR LIMITED WARRANTY, WHICH IS AVAILABLE FOR YOUR INSPECTION UPON REQUEST.

JAPAN NHK Jabsco Company Ltd. 3-21-10, Shin-Yokohama Kohoku-Ku, Yokohama, 222 Tel: 045-475-8906 Fax: 045-475-8908 GERMANY Jabsco GmbH Oststrasse 28 22844 Norderstedt Tel: +49-40-53 53 73-0 Fax: +49-40-53 53 73-11