





**TEMPERATURE RISE**

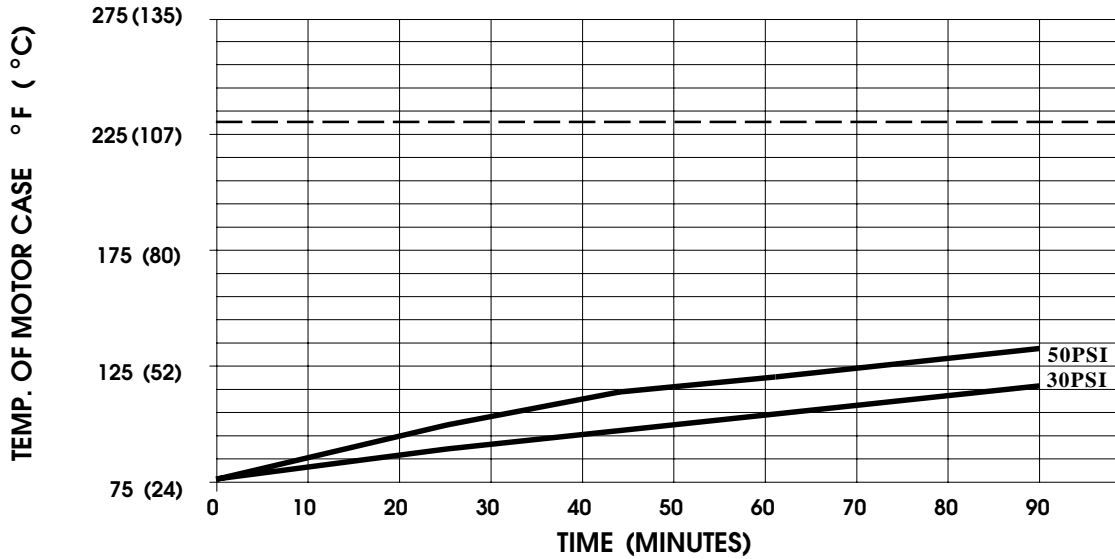

THIS GRAPH IS FOR USE AS A DESIGN GUIDE. IT IS BASED ON RUNNING CONTINUOUSLY WITH AN AMBIENT TEMPERATURE OF 75° F IN STILL AIR. THE THERMAL BREAKER WILL OPEN WHEN THE CASE TEMPERATURE REACHES 230° F.

(- - - - - TRIP POINT OF THERMAL PROTECTOR)

**TYPICAL PERFORMANCE**

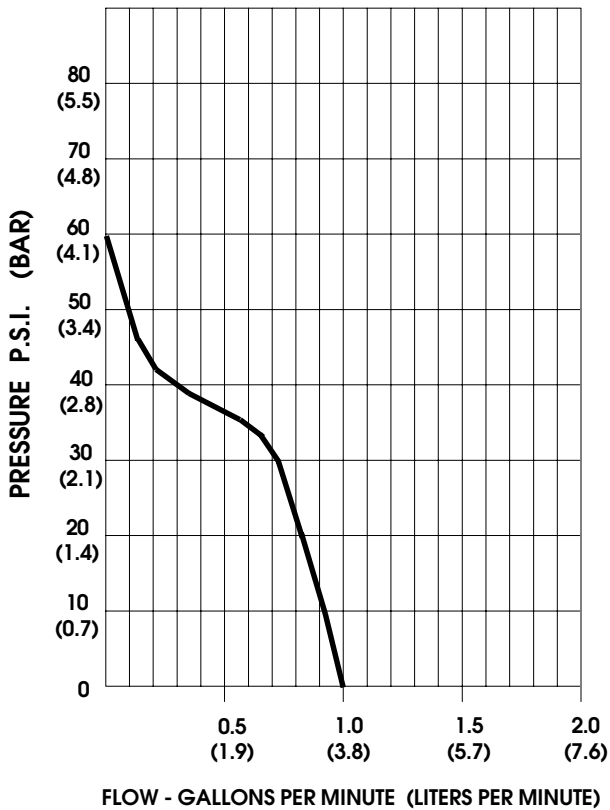

PRESSURE (PSI)	FLOW (GPM/LIT)	RPM MIN/MAX	CURRENT (AMPS)	VOLTAGE (VOLTS)
OPEN	1.00/3.8	1540/1555	0.82	24VAC
10	0.95/3.6	1500/1515	0.99	"
20	0.89/3.4	1440/1460	1.21	"
30	0.74/2.8	1370/1400	1.43	"
40	0.41/1.6	1305/1340	1.62	"
50	0.01/0.3	1255/1295	1.81	"

-SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

-ALL DATA BASED ON TESTING WITH WATER AT AMBIENT TEMPERATURE.