

WALBRO RECIPROCATING FUEL PUMPS

FRA, FRD



FRA MODEL UNIQUE FEATURES

For applications where low cost and good durability are required

- Flow: to 190 lph (52 gph)
- Continuous duty life (diesel fuel): >5000 hrs
- Weight: 0.74 kg (1.63 lbs)
- Pump cycles continuously when power is on

FRD MODEL UNIQUE FEATURES

For applications where battery life, low noise and better durability are important

- Flow: to 210 lph (55 gph)
- Ampere hours: up to 70% less than FRA & FRC
- Continuous duty life (diesel fuel): >10000 hrs
- Weight: 0.75 kg (1.65 lbs)
- Pump cycles only when fuel is demanded

FRB, FRC



FRB MODEL UNIQUE FEATURES

For applications where battery life, low noise and best durability are important and fuel quality is questionable

- Flow: to 225 lph (60 gph)
- Ampere hours: up to 70% less than FRA & FRC
- Continuous duty life (diesel fuel): >18000 hrs
- Weight: 0.83 kg (1.83 lbs)
- Pump cycles only when fuel is demanded
- Replaceable filter

FRC MODEL UNIQUE FEATURES

For applications where low cost and better durability are important and fuel quality is questionable

- Flow: to 210 lph (55 gph)
- Continuous duty life (diesel fuel): >10000 hrs
- Weight: 0.83 kg (1.83 lbs)
- Pump cycles continuously when power is on
- Replaceable filter

STANDARD FEATURES- ALL MODELS

- Current requirement: < 2 amps average
- Reverse polarity protected up to 60 minutes
- Self priming (dry lift) of more than 120cm (48")
- Dry run to four (4) hours
- Compatible with all commercially available pump grade gasoline, gasohol, diesel or bio-diesel
- Operating temperature: -40 ~ +70C (-40 ~ +155F)
- Transient voltage protected to 100 volts
- U.S. Coast Guard 16623-1 and 16623-2 approved
- European CE Standards EN 61000-6-2 and EN 6-3-2100 approved

WALBRO RECIPROCATING FUEL PUMPS

CONFIGURATION OPTIONS AVAILABLE









OPTION	FRA	FRB	FRC	FRD
12 volt	X	X	X	X
24 volt	X	X	X	X
Lead wires, connectors and electrical ground (see notes 1 & 2)	A, B, C	A	A, B, C	A
Output pressure: 20 kpa (3 psi)	X	X	X	X
Output pressure: 35 kpa (5 psi)	X	X	X	X
Output pressure: 50 kpa (7 psi)	X	X	X	X
Output pressure: 70 kpa (10 psi)	X	X	X	X
Output pressure: 90 kpa (13 psi)	X	X	X	X
Self priming (dry lift) of more than 305cm (120") (see note 3)	X	X	X	X
Dry run to 8 hours (see note 4)	X	X	X	X
Standard external finish (meets ASTM B-117 (96) hr salt spray)	X	X	X	X
Marine external finish (meets ASTM B-117 (1000) hr salt spray)	X	X	X	X
Bowl drain (see Figures 1 and 3)		X	X	
Transparent fuel bowl- not USCG approved (see Figure 2)		X	X	
Inlet filter: 70 micron		X	X	
Inlet filter: 420 micron		X	X	
Magnetic trap		X	X	
Inlet fuel fitting thread- 1/8-27 NPSF	X	X	X	X
Inlet fuel fitting thread- 1/4-18 NPSF		X	X	
Outlet fuel fitting thread- 1/8-27 NPSF	X	X	X	X
Outlet fuel fitting thread- 1/4-18 NPSF	X	X	X	X
Internal outlet check valve (available with 1/8-27 NPSF only)	X	X	X	X
External outlet check valve - 1/8-27 NPSF (see Figure 4)	X	X	X	X
External outlet check valve - 1/4-18 NPSF (see Figure 4)	X	X	X	X
Straight fuel fitting: 1/8-27 NPSF to 5/16 hose barb (see Figure 5)	X	X	X	X
Straight fuel fitting: 1/4-18 NPSF to 5/16 hose barb (see Figure 5)	X	X	X	X
45° fuel fitting: 1/8-27 NPSF to 5/16 hose barb (see Figure 6)	X	X	X	X
45° fuel fitting: 1/4-18 NPSF to 5/16 hose barb (see Figure 6)	X	X	X	X
90° fuel fitting: 1/8-27 NPSF to 5/16 hose barb (see Figure 7)	X	X	X	X
90° fuel fitting: 1/4-18 NPSF to 5/16 hose barb (see Figure 7)	X	X	X	X
Adjustable pressure regulator (see Figure 8)	X	X	X	X
Mounting (see "MOUNTING AND FITTING LOCATIONS AND DETAILS")	F or G	F or G	F or G	F or G
Fitting location (see "MOUNTING AND FITTING LOCATIONS AND DETAILS")	H, J	H, K	H, K	H, J

Notes:


1. Lead wire and electrical ground options
 - A. Two wire: Must be battery or vehicle grounded by customer, does not have internal ground (Body must be externally grounded for gasoline applications)
 - B. Two wire: Must be battery or vehicle grounded by customer and includes internal ground (Suitable for gasoline)
 - C. One wire: Pump must be battery or vehicle grounded by customer and includes internal ground (Suitable for gasoline)
2. Lead wire lengths and electrical connectors per customer requirement
3. Requires standard inlet and outlet valves and an optional outlet check valve
4. Requires special wear protection

WALBRO RECIPROCATING FUEL PUMPS

FIGURES- CONFIGURATION OPTIONS AVAILABLE



<p>Figure 1 Fuel Bowl Drain</p> 	<p>Figure 2 Transparent Fuel Bowl</p> 	<p>Figure 3 Transparent Fuel Bowl Drain</p> 	<p>Figure 4 Part # 128-3202: Straight 1/8-27 NPTF to 5/16 Hose Barb w/Check Valve or Part # 128-3220: 1/4-18 NPTF to 5/16 Hose Barb w/Check Valve</p> 
<p>Figure 5 Part # 128-3110: Straight 1/8-27 NPTF to 5/16 Hose Barb Fuel Fitting or Part # 128-3005: Straight 1/4-18 NPTF to 5/16 Hose Barb Fuel Fitting</p> 	<p>Figure 6 Part # 128-120: 45° 1/8-27 NPTF to 5/16 Hose Barb Fuel Fitting or Part # 128-3064 45° 1/4-18 NPTF to 5/16 Hose Barb Fuel Fitting</p> 	<p>Figure 7 Part # 128-3094: 90° 1/8-27 NPTF to 5/16 Hose Barb Fuel Fitting or Part # 128-3061 90° 1/4-18 NPTF to 5/16 Hose Barb Fuel Fitting</p> 	<p>Figure 8 Part # 135-631: Adjustable Fuel Pressure Regulator (1.7 ~ 5.0 psi)</p> 

OVERALL DIMENSIONS, MOUNTING DETAILS AND FITTING LOCATIONS

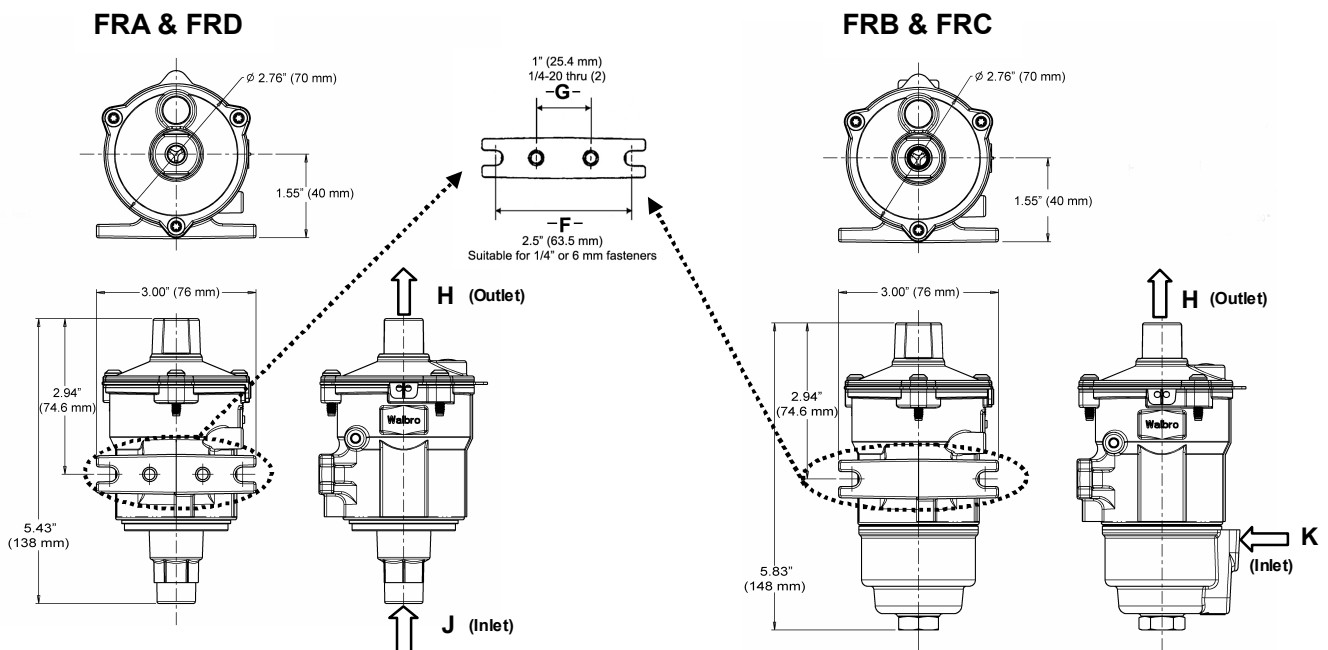

WALBRO RECIPROCATING FUEL PUMPS

FUEL PUMP SIZING GUIDELINES

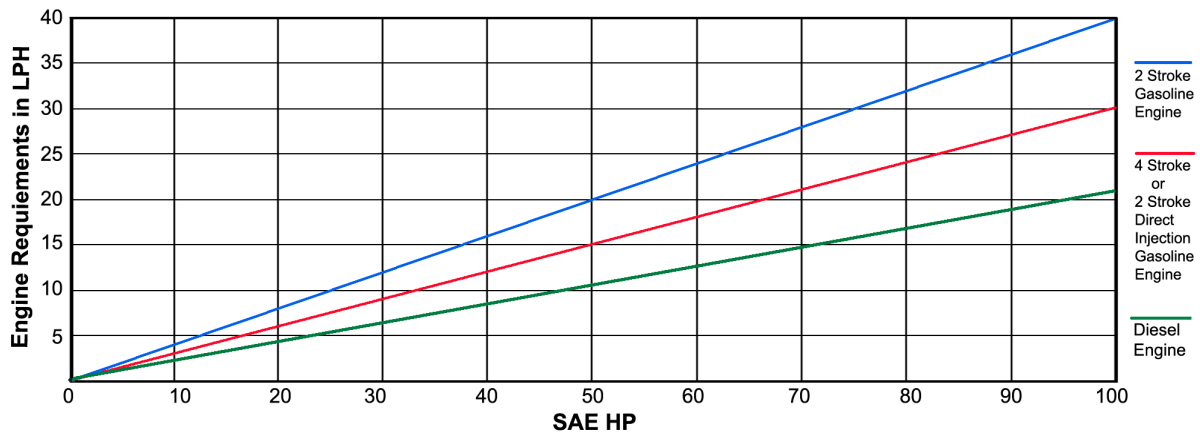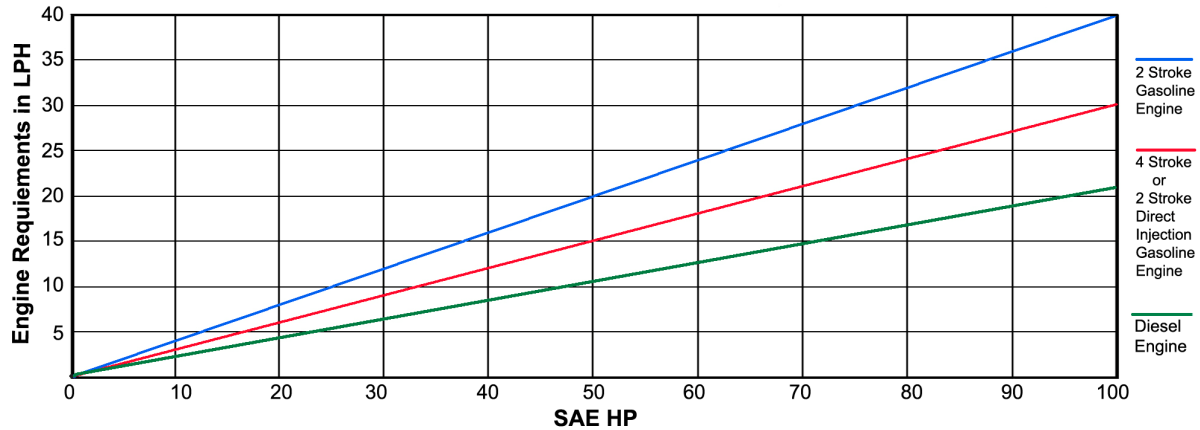

To calculate pump size requirements:

- 1) Engine fuel requirements (in lph) shown in the above charts is an approximation based on the following calculation:
 - a. Two Stroke engines = (HP)(.40) (based on BSFC of .67[#]/HP/HR)
 - b. Four stroke or direct injected two stroke engines = (HP)(.30) (based on BSFC of .50[#]/HP/HR)
 - c. Diesel engines = (HP)(.25) (based on BSFC of .42[#]/HP/HR)
- 2) Consider an additional hot fuel (for gasoline applications) allowance of up to 30% (application specific)
- 3) Consider an additional fuel allowance for injector pump cooling (diesel applications only)
- 4) Consider an additional safety allowance for certain applications where fuel lines, filters, etc create abnormal pressure losses (confirmation by testing recommended)
- 5) For additional application assistance, contact Walbro Engine Management



**Walbro Engine
Management**

**Walbro Engine Management
Worldwide Headquarters**
7400 N. Oracle Road, Ste. 310
Tucson, Arizona 85704
Ph: (520) 877-3000
Fax (520) 877-3006

**Walbro North America
Sales and Engineering**
6242 Garfield Avenue
Cass City, Michigan 48726
Ph: (989) 872-2131
Fax (989) 872-7036

**Walbro Italy
Sales and Engineering**
Via Caduti di Melissa, 12
40033 Casalecchio di Reno
Bologna
Italy
Ph: +39 (051) 61-321-13
Fax: +39 (051) 61-322-33

**Walbro Japan
Sales and Engineering**
Suzue Baydium Building 2F
1-15-1 Kaigan
Minato-ku, Tokyo
105-0022 Japan
Ph: +81 (3) 5401-4511
Fax: +81 (3) 5401-4515

We Enable Machines That Make Life Better!

www.walbro.com