

Column Sump Pumps


PUMP NO.		PUMP:		MOTOR:		VOLTS:	
FOR:		TDH:		HP:		HZ:	
CERT. BY:		GPM:		RPM:		FRAME:	
DATE:		SIZE & TYPE:		PHASE:		ENCLOSURE:	
ENCLOSURE:		ENCLOSURE:		ENCLOSURE:		ENCLOSURE:	

Model	A Pump Length	B Sump Depth	Standard Pump Lengths	
			Pump Length	No. Int. Bearings
SA 2	26"	18" - 24"	0' - 2'	0
SA 4	50"	25" - 48"	2' - 4'	0
SA 6	72"	49" - 72"	4' - 6'	1
SA 8	96"	73" - 96"	6' - 8'	1

Motors			
1 Phase	3 Phase	Motor Frame	C
1750 RPM	1750 RPM		
.33	.33	56C	12
.50	.50	56C	12
.75	.75	56C	12

Square Basin Covers					
B Sump	A Cover	E Cover Thick.	Cover Drilled When Specified		
			J	K	L
18	20	.31	4	.44	9.50
24	27	.31	4	.63	12.75
30	34	.31	4	.63	16.25
36	40	.38	4	.63	19.25
42	46	.38	8	.63	22.25
48	52	.50	8	.63	25.25

Square Basin Covers & Manhole					
B	A	E	J	K	L
24	27	.31	4	.63	12.75
30	34	.31	4	.63	16.25
36	40	.38	4	.63	19.25
42	46	.38	8	.63	22.25
48	52	.50	8	.63	25.25

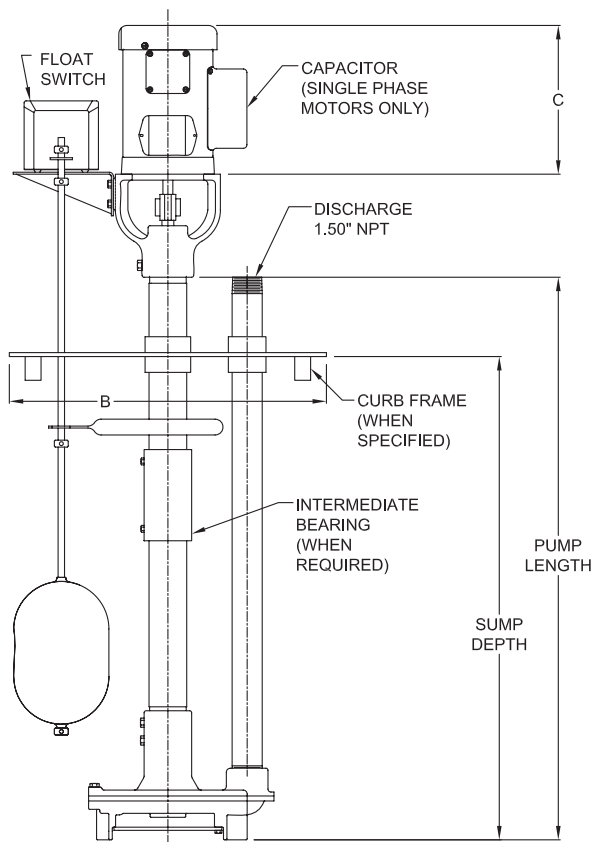

* Vent & Cover drilling for vapor tight construction only or when specified.
High water alarm when specified.

