
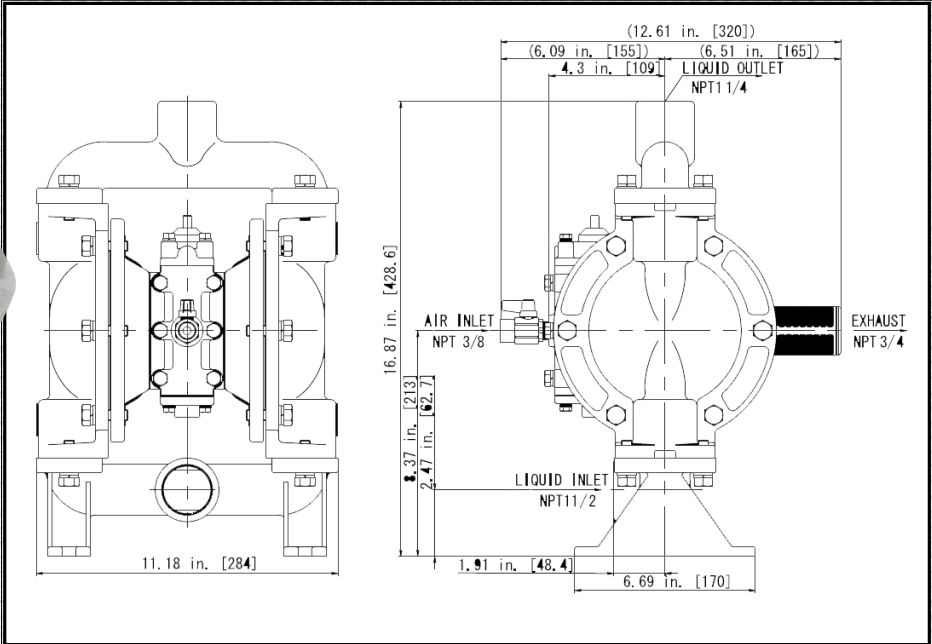
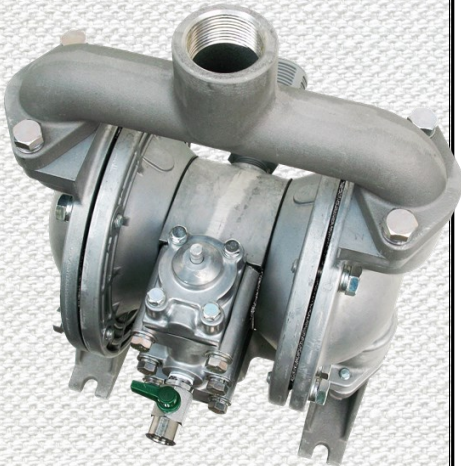


NDP-32 Pump

PROBLEM SOLVED!

Have you ever wanted to switch out your old pump for a Yamada®, but faced re-piping issues? With the NEW NDP-32 Pump from Yamada, your problems are solved. This new 1-1/2" inlet x 1-1/4" outlet matches up dimensionally with old competing brand's designs. Now your conversion to Yamada is just a little bit easier.

- Available in Aluminum and any elastomer (*Buna N*, *Hytrel®*, *Viton®*, *EPDM*, *Neoprene®*, *Santoprene®* & *PTFE*)
- The same Non-Lube design air motor used in all the Yamada NDP Series Pumps
- All the usual Yamada features: bolted design, outside accessible air motor, ease of maintenance, interchangeability of parts & Yamada quality


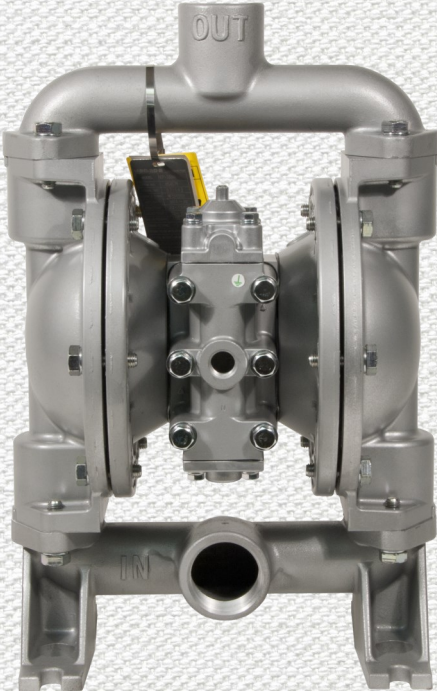


Simplify Your Pump Replacement



The Proof is Clear!

- **Fluid connections:**
Suction port: NPT 1-1/2" (F)
Discharge port: NPT 1-1/4" (F)
- **Air connections:**
Supply port: NPT 3/8"
Exhaust port: NPT 3/4"
- **Operating air pressure:**
30 - 100 PSI
- **Maximum discharge pressure:**
100 PSI
- **Discharge volume/cycle:**
0.18 gallons
- **Maximum discharge volume:**
50.2 gallons/min
- **Maximum air consumption:**
70.6 SCFM
- **Particle size:**
3 mm or less
- **Operating fluid temperature range:**
-40 - 248°F
- **A-weighted emission sound pressure level (ISO 1996):**
81 dB
- **Weight:**
26.5 lbs.

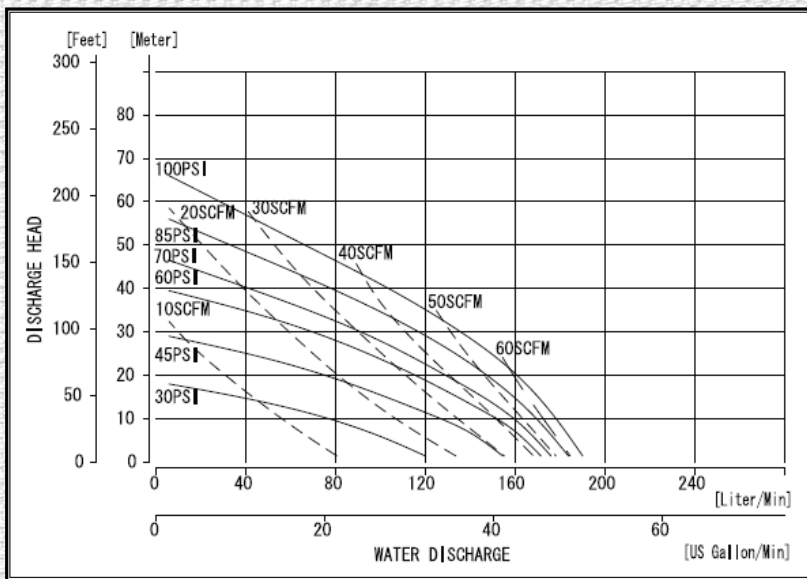

Yamada® is a registered trademark of Yamada America, Inc. Hytrel® is a registered trademark of E.I. du Pont de Nemours and Company. Santoprene® is a registered trademark of Advanced Elastomer Systems. Viton® is a registered trademark of DuPont Performance Elastomers. Due to Yamada's continued commitment to product improvement, specifications may change without notice.

Label:

