# Introducing the NEW-EF-Series




### 12-Volt Lithium Ion Drum Pump Motor



## Maximum Fluid Transfer on Full Charge 450 gal /1,700 liters (low speed) 275 gal/1,040 liters (high speed)

Note: Not intended for use with flammables or in hazardous locations.

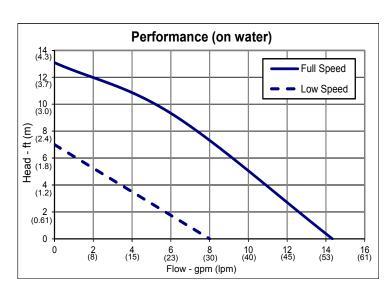

#### **Features**

- 12-volt\*, 3,200 mAh lithium ion battery for maximum performance
- Cordless design for ultimate portability
- Lightweight yet powerful
- Dual speed for precise fluid dispensing
- Dual cooling fans for longer battery life
- Electronic overload protection
- Integrated charging port
- Fits all EF Series pump tubes

Run Time Betw	een Charges
High Speed	20 minutes
Low Speed	50 minutes

Note: Increased head, specific gravity, & viscosity will decrease run time.

Maximum Performance Limits				
High Speed Motor Setting	If specific gravity is:	viscosity can not exceed:	Max. Flow gpm (lpm)	Max. Head ft (m)
	1.0	100 cP	3 (11.4)	14 (4.3)
	1.1	50 cP	7 (26.5)	11(3.4)
	1.2	1 cP	12 (45.4)	9 (2.7)
Low Speed Motor Setting	If specific gravity is:	viscosity can not exceed:	Max. Flow gpm (lpm)	Max. Head ft (m)
	up to 1.6	25 cP	6 (22.7)	3 (0.9)

## S6 Kits & Accessories



#### **Motor Kits\***

Part Number	Description
108017-3	S6, wall hanger, & 115V charger kit, USA plug
108018-3	S6 & 115V charger kit, USA plug
108017-4	S6, wall hanger, & 230V charger kit, Euro plug
108018-4	S6 & 230V charger kit, Euro plug
108018-5	S6 & 12V car charger kit

<sup>\*</sup>For kits that include pump, please contact factory.

#### **Chargers**

Part Number	Description	Input Cord Length	Output Cord Length
108144	115V charger, USA plug, CE, UL	2.2 ft /1 m)	
108145	230V charger, Euro plug, CE, UL	3.3 ft (1 m)	5 ft (1.5 m)
108286	12V car charger, 12V, CE	3.6 ft (1.1 m)	





Hanger

Part Number	Description
108287	Wall mount hanger with mounting hardware (charger not included)

• Durable, corrosion resistant nylor

• Stores charger internally

• Holds any EF Series pump tube

• Indicator hole for charger status



RoHS IP24



