



## Sea-Lect® Y-Valve YV-095D-F



(Shown mounted to plexiglass plate)

- Durable, lightweight Delrin® plastic
- Accommodates 1" to 1-1/2" hose
- Easy turning handle made from durable, epoxy-coated aluminum
- Flush-mounted so that only handle and bonnet/trim ring are visible
  - Max deck/wall thickness: 5/8 in.
- Full port opening
- Locking tab on handle
- Arrows on handle indicate flow path
- Supports either 2 or 3 flow-path mode


### Performance

Max Pressure	40 psi (2.8 kg/cm <sup>2</sup> )
Max Service Temp	150°F (66°C)


### Optional 2-Way or 3-Way Flow Mode



Easily removable travel stop ring converts from 2 flow-path mode to 3 flow-path mode



**2 Flow-Path Mode**  
Flow path A-to-C or B-to-C



**3 Flow-Path Mode**  
Flow path A-to-C, B-to-C or A-to-B

### Available Ports

	in	1	1-1/2
	cm	1.27	1.6
	Barbed		S
	NPT Female (Tapped)	•	

S Standard • Optional


### Materials

Body & Ports*	Delrin / Gray
Handle	Epoxy-coated Aluminum / Gray
Seat*	Santoprene
Fasteners	Stainless Steel & Brass
Spacers	Polypropylene / Black
Lubricant*	Dow Corning Silicone Grease #44


\* In contact with fluid

### Face Plate (Trim Ring)





Trim Ring



Head-Discharge-Tank

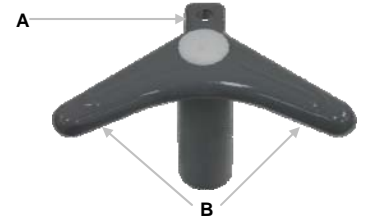

All-aluminum Y-Valve handle features lockable tab (A) and arrows (B) to indicate direction of flow.

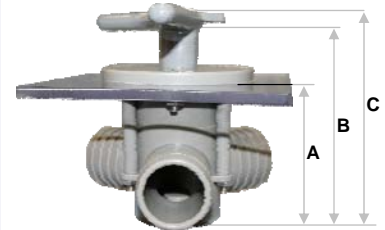

	in	cm
A	3	7.6
B	4-1/4	10.8
C	4-5/8	11.7
D	4-1/2	11.4
E	4-1/8	10.5
F	3-1/2	8.9
(Bolt Circle Diam) G	2	5.1
H	4-1/8	10.5
(Ctr Shaft Diam) J	13/16	2.1
Mounting Holes	3/16	0.5
Weight	0.75 lb	0.34 kg

# Sea-Lect® Y-Valve YV-095D-F



**Example: YV-095D-F-35-838383**

- Sea-Lect Y-Valve
- Model style 95 (Delrin/Gray)
- Flush mounting
- Epoxy-coated Aluminum V-Shaped Handle
- "Head-Discharge-Tank" Trim Ring
- 1-1/2" Barbed Hose Connections



Sea-Lect Product	
Option	Code
Y-Valve	YV

Family	
Option	Code
1-1/2" Nominal Port Size	095D

Mounting Style	
Option	Code
Flush Mount	F

**YV - 095D - F - 3 5 - 83 83 83**

Activation	
Option	Code
Straight Handle (Delrin)	2
V-Handle (Aluminum)	3

Trim Ring (Face Plate)	
Option	Code
Head-Discharge-Tank (Delrin)	5

Option	Code		
	Port 1	Port 2	Port 3
1" NPT Tapped	51	51	51
1-1/2" Barbed	83	83	83