

FLOJET®

Flojet VERSJet™ Series HIGH CAPACITY PUMPS



The New VERSJet High Capacity Pumps are backed by Flojet's diaphragm pump technology, a brand enjoying over 35 years of operational excellence. The innovative new and improved five chamber design offers unequalled performance, capable of handling up to 6 GPM at open flow.

With pressures up to 70 psi (4.8 Bar), self-priming capabilities up to 10 feet (wetted), and heavier duty brushes extending the operating life up to 50% longer than existing Flojet Quad Series diaphragm pumps, the Flojet VERSJet pumps are designed to be the most reliable and versatile pumps on the market today. These pumps are the ideal solution for applications including spraying, fluid transfer, filtration, cooling, dispensing and pressure boosting.

Features and Benefits

- Multiple sizing options, providing flow up to 6 GPM (22.7 LPM) and pressure up to 70 PSI (4.8 Bar)
- Robust material selection, suitable for handling a broad range of chemicals
- Co-injected molded diaphragm technology, ensuring run dry capability, extending the life of the pump upwards of 50%
- Sealed motor and pressure switch, ensuring years of dependable reliability
- Self priming, accommodating up to 10ft (3m) (wetted)



Engineered for life



Applications



General Industrial

- Chemical washdown
- Evaporative Cooling Systems



Agricultural


- Fogging / Misting



Automotive

- Fluid Exchange

Head-Flow Chart

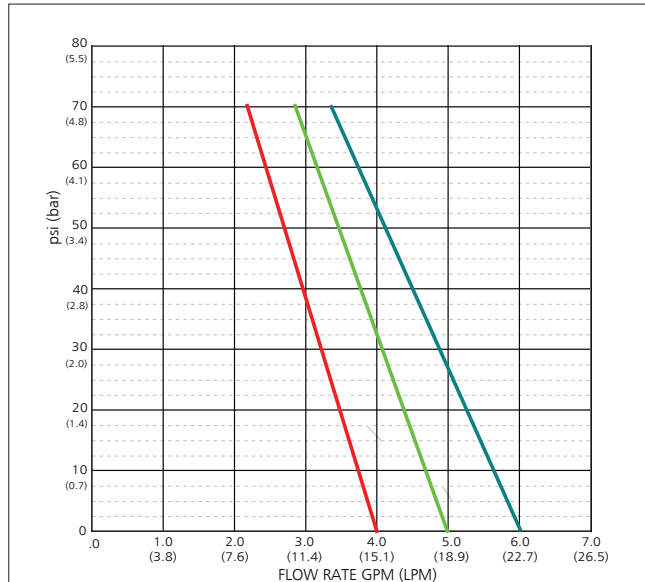

Santoprene® is a registered trademark of DuPont Performance Elastomers.

4.0 GPM

PSI	GPM	AMPS
0	4.0	3.6
10	3.8	5.0
20	3.5	6.4
30	3.3	7.8
40	3.0	9.0
50	2.7	10.1
60	2.5	11.1
70	2.2	12.0

5.0 GPM

PSI	GPM	AMPS
0	5.0	5.5
10	4.7	7.9
20	4.4	9.5
30	4.1	10.9
40	3.8	12.1
50	3.4	13.1
60	3.1	14.0
70	2.8	14.7

6.0 GPM

PSI	GPM	AMPS
0	6.0	5.5
10	5.7	7.9
20	5.3	9.5
30	4.9	10.9
40	4.5	12.1
50	4.1	13.1
60	3.7	14.0
70	3.3	14.7

15.1 LPM

BAR	LPM	AMPS
0	15.1	3.6
0.7	14.2	5.0
1.4	13.3	6.5
2.0	12.3	7.8
2.8	11.3	9.0
3.4	10.3	10.1
4.1	9.3	11.1
4.8	8.3	12.0

18.9 LPM

BAR	LPM	AMPS
0	18.9	5.5
0.7	18.1	7.9
1.4	16.8	9.5
2.0	15.5	10.9
2.8	14.2	12.1
3.4	13.0	13.1
4.1	11.9	14.0
4.8	10.6	14.7

22.7 LPM

BAR	LPM	AMPS
0	22.7	5.5
0.7	21.4	7.9
1.4	20.0	9.5
2.0	18.5	10.9
2.8	17.0	12.1
3.4	15.5	13.1
4.1	14.0	14.0
4.8	12.5	14.7


Note: Pressure, flow and Amp data is tested at 12.8 volts.

See Flojet R7300 series for 7.0 GPM models.

Specifications

Motor Design	Perm. Magnet TENV (non-ventilated)
Voltage Options	12 VDC, 24 VDC
Pump Head Material	Glass Filled Nylon
Diaphragm Elastomer	Santoprene®
Check Valve Materials	Glass Filled Nylon, EPDM
Maximum Flow Rate	6.0 GPM (22.7 LPM)
Maximum Pressure	70 PSI (4.8 Bar)
Duty Cycle	Intermittent
Weight	7.6 lbs. (3.5 Kg)
Certifications	CE, RoHS
Standard Port Size Inlet/Outlet	1/2" HB (4 GPM), 3/4" HB (5 and 6 GPM)

Dimensional Drawing - 5 GPM / 6 GPM models

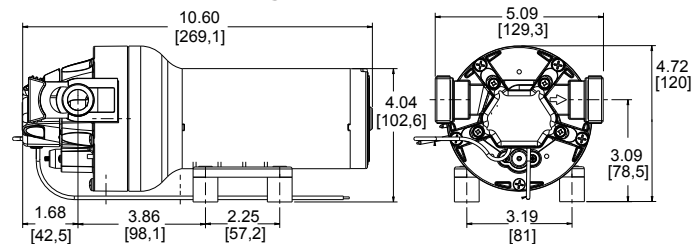

Note: 4 GPM model overall length 9.91 in. (251.7 mm). All other dimensions are the same as the 5 GPM / 6 GPM models. Dimensions in inches [mm]

Part No.	Volts	GPM (LPM)	Switch PSI (BAR)	Diaphragm	Check Valve
R8400144	12	4.0 (15.1)	70 (4.8)	Santo	EPDM
R8400344	24	4.0 (15.1)	70 (4.8)	Santo	EPDM
R8500144	12	5.0 (18.9)	70 (4.8)	Santo	EPDM
R8500344	24	5.0 (18.9)	70 (4.8)	Santo	EPDM
R8600144	12	6.0 (22.7)	70 (4.8)	Santo	EPDM
R8600344	24	6.0 (22.7)	70 (4.8)	Santo	EPDM



www.flojet.com

USA

ITT Corporation
666 E. Dyer Road
Santa Ana, CA 92705
Tel: (714) 557-4700
Fax: (714) 628-8478

UK

ITT Industries
Bingley Road, Hoddesdon
Hertfordshire EN11 0BU
Tel: +44 (0) 1992 450145
Fax: +44 (0) 1992 467132

CHINA

ITT Corporation
30/F Tower A
100 Zunyi Road
Shanghai, China 200051
Tel: +86-21-2208-2888
Fax: +86-21-2208-2999

GERMANY

ITT Corporation
Oststrasse 28
22844 Norderstedt
Tel: +49-40-53 53 73-0
Fax: +49-40-53 53 73-11

JAPAN

NHK Jabsco Company Ltd.
3-21-10, Shin-Yokohama
Kohoku-Ku, Yokohama, 222-0033
Tel: +81-045-475-8906
Fax: +81-045-477-1162

ITALY

ITT Corporation
Via Tommaseo, 6
20059 Vimercate, Milano
Tel: +39 039 685 2323
Fax: +39 039 666 307

Warranty: All products of the company are sold and all services of the company are offered subject to the company's warranty and terms and conditions of sale, copies of which will be furnished upon request. The information provided herein is for guidance only, it does not constitute a guarantee of the performance or specification of any individual product or component.