

## UTILITY PUMPS

# MYERS® DU25


## 1/4 HP Stainless Steel Utility Pump

### SPECIFICATIONS

Applications	dewatering	
Capacities	19 GPM	71.9 LPM
Shut-off head	23'	7 m
Operations	manual	
Pump-down range	3/8"	9.5 mm
Solids handling	1/8"	3.2 mm
Liquids handling	clear water	
Continuous liquid temp.	77° F	22° C
Motor	1/4 HP, PSC	
Electrical data	115V, 60Hz, 2.5A, 3450 RPM	
Acceptable pH range	5-9	
Mechanical seal	dual lip seal with ceramic shaft sleeve	
Housing	stainless steel	
Impeller	polyphenylene oxide	
Power cord	15' three-prong, SJTW 18-3	
Discharge, NPT	1-1/4"	
Dimensions	9"H x 7"W	

### FEATURES

- Pumps up to 19 GPM
- Extra durable for heavy-duty use
- Used for dewatering shallow flooded areas such as basements, window wells, rooftops, ponds and stock tanks
- 1-1/4" NPT discharge
- 15' three-prong power cord
- Includes 1" x 3/4" garden hose adapter
- Pumps standing water down to 1/8"
- 1-1/4" NPT x 1" NPT adapter
- Rated for continuous duty
- CSA Listed

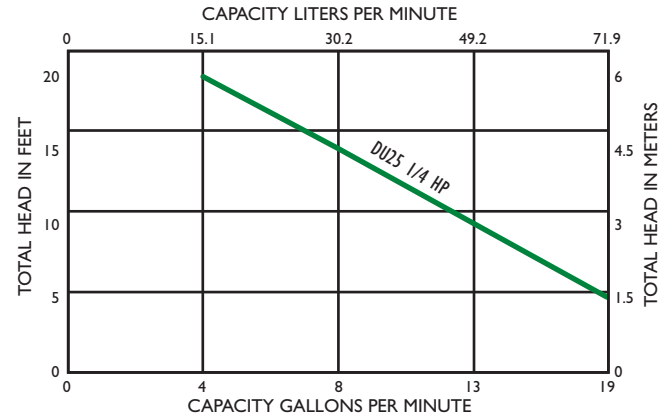

USA  
293 WRIGHT STREET, DELAVAN, WI 53115 WWW.FEMYERS.COM  
PH: 888-987-8677 ORDERS FAX: 800-426-9446

CANADA  
490 PINEBUSH ROAD, UNIT 4, CAMBRIDGE, ONTARIO N1T 0A5  
PH: 800-363-7867 ORDERS FAX: 888-606-5484

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.