




Gear Drive



F416 Air Motor and F560GS3A

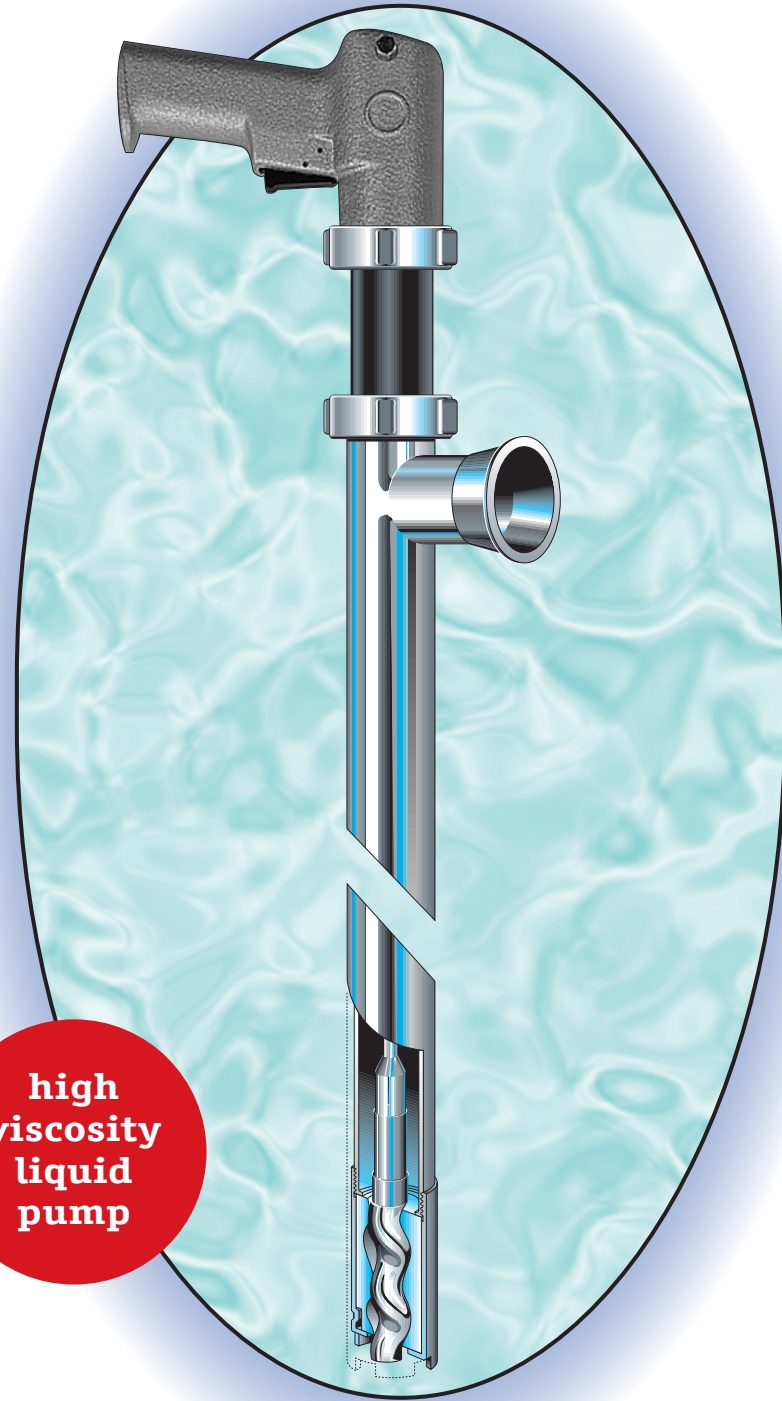

high viscosity liquid pump


FEATURES:

- positive displacement
- progressive cavity design
- flow rates to 10 gpm
- perfect for shear sensitive products
- electric or air drive
- viscosities up to 100,000 cp
- pumps soft suspended solids (3/8")
- complete disassembly/reassembly for cleaning under 10 minutes


APPLICATIONS:

- tomato paste
- honey
- corn syrup
- molasses
- mascara
- gels
- juice concentrates

Direct Drive


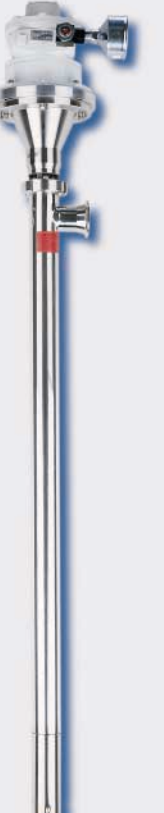


G11A Air Motor and F560S3A

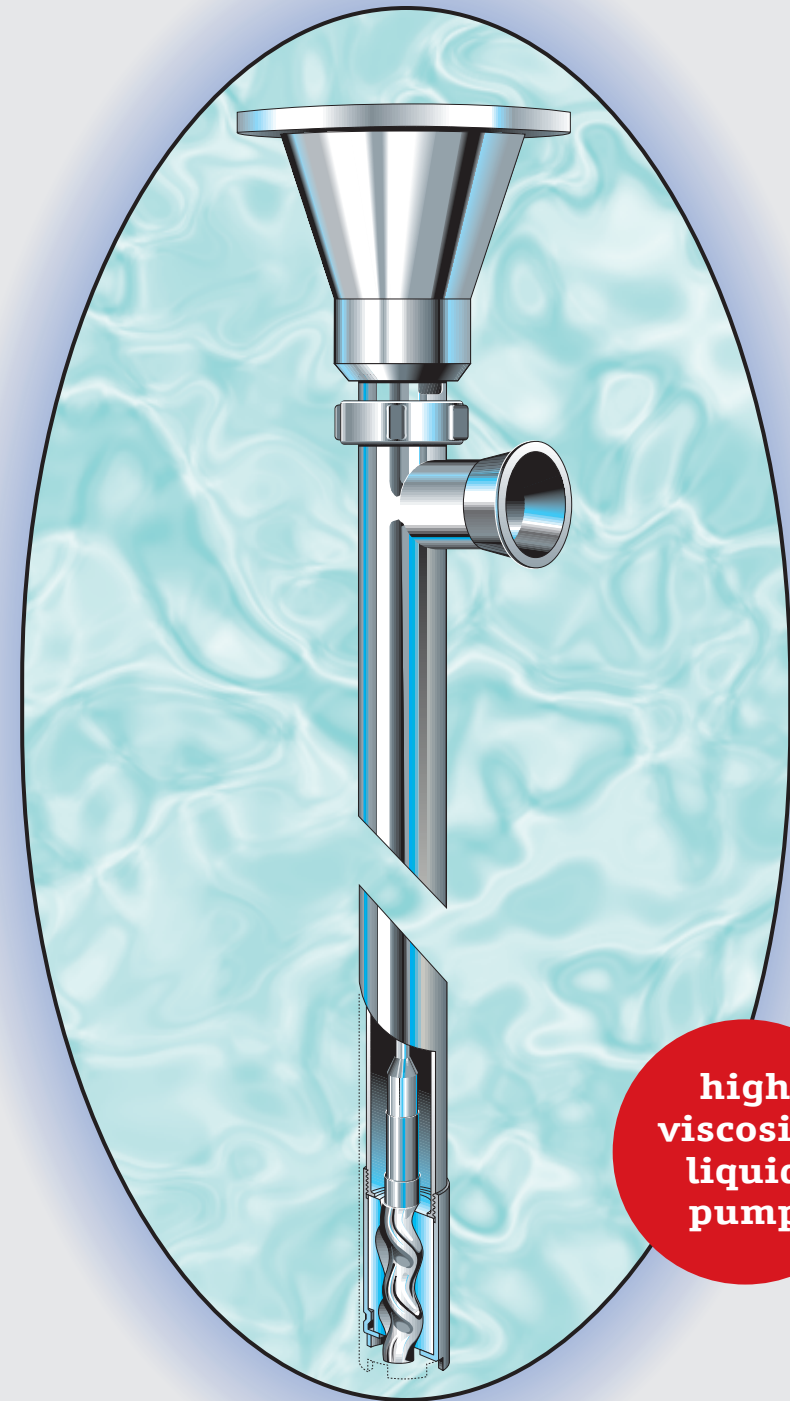

high viscosity liquid pump

PUMP F560GS3A 50/21 and 54/26 specifics				
<b>MOTORS:</b> ELECTRIC				
F458	F458-1	F460-1EX-UL	F460EX-UL	F457
AIR				
F416	F416-1			
<b>TUBESET CONSTRUCTION:</b>				
OUTER TUBE	316 STAINLESS STEEL			
DRIVE SHAFT	316 STAINLESS STEEL			
STATOR HOUSING	316 STAINLESS STEEL			
STATOR	TEFLON OR FOOD GRADE BUNA N			
MECHANICAL SEAL	316 STAINLESS STEEL/SILICON CARBIDE			
<b>LENGTHS AVAILABLE:</b>	27"	39"	47"	60"

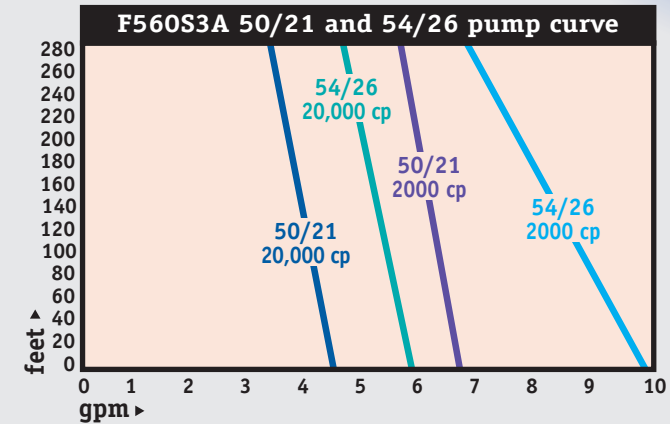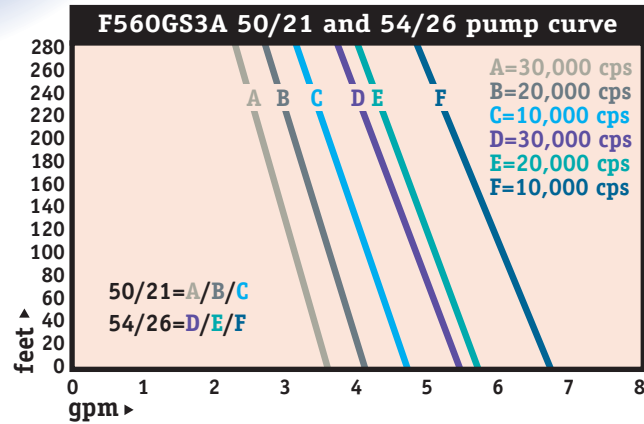

PUMP F560S3A 50/21 and 54/26 specifics	
<b>MOTORS:</b> ELECTRIC	
1.5 HP, 900 RPM, TEFC 230/460/3	
AIR	
1.5HP	4HP 5HP
<b>TUBESET CONSTRUCTION:</b>	
OUTER TUBE	316 STAINLESS STEEL
DRIVE SHAFT	316 STAINLESS STEEL
STATOR HOUSING	316 STAINLESS STEEL
STATOR	TEFLON OR FOOD GRADE BUNA N
MECHANICAL SEAL	316 STAINLESS STEEL/SILICON CARBIDE
<b>LENGTHS AVAILABLE:</b>	27" 39" 47" 60"
<b>MAXIMUM RPM:</b> 900	<b>ACCESSORIES AVAILABLE</b>