


FBVE SERIES

IT'S TIME TO EVOLVE



FEATURES

- Motorized valve operation for seacock sizes 3/4" to 5."
- Wireless control from helm; push-button control from engine room.
- Choose between (and order separately) LCD touchscreen and membrane touchpad control; either shows individual valve status and enables wireless control of connected seacocks from helm.
- LCD display also works with GROCO® SSA flow monitor system.
- Programmable set-up mode commands the generator seacock (or any other seacock) to open when you start and close when the generator stops. No more generator flooding.
- Manual valve operation without back-driving the gear train and without disconnecting anything – just operate the valve as a standard manual seacock.
- Minimal power draw.
- Reversible gearbox mount enables selectable direction of handle rotation.
- Same mount bolt pattern as GROCO® FBV and BV, and most other brands.
- Fully submersible.
- UL listed seacock.
- NMEA2000 ready.
- 12V and 24V models.

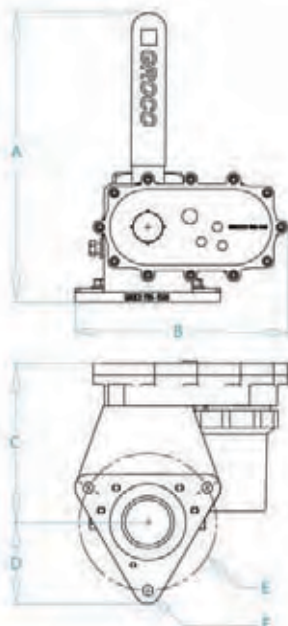

MODELS	PIPE SIZE	A	B	C	D	E	F	WEIGHT
FBVE-750	3/4"	6.1	6.4	4.5	2.0	3.12	3 x 5/16"	4.4
FBVE-1000	1"	7.3	6.5	4.8	2.1	3.38	3 x 5/16"	5.0
FBVE-1250	1-1/4"	7.1	6.6	5.0	2.3	3.62	3 x 5/16"	5.8
FBVE-1500	1-1/2"	9.5	7.0	5.2	2.7	4.50	3 x 5/16"	7.1
FBVE-2000	2"	10.1	7.3	5.5	3.0	5.00	3 x 3/8"	9.7
FBVE-2500	2-1/2"	12.4	9.2	6.7	3.6	5.88	3 x 3/8"	22.0
FBVE-3000	3"	14.8	9.7	6.7	4.2	7.00	3 x 3/8"	31.0
FBVE-4000	4"	-	-	-	-	-	-	-
FBVE-5000	5"	-	-	-	-	-	-	-

*Weight is for the valve and gearbox only