


VERSA-TWIN 2130 Series Plunger Pumps with Pressure Switch

THE INDUSTRY-FIRST INTEGRATED AUTOMATIC-DEMAND PRESSURE SWITCH

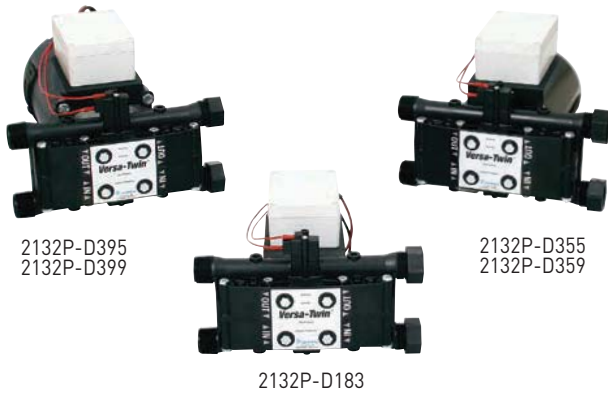

- Integrated pressure switch designed for the pump to work as a demand pump
- Extends the life of the pump when the duty cycle is less than 100%, for example, a 50% duty cycle extends the life of the system two times and a 25% duty cycle extends the life four times
- Reduces end-user installation charges by allowing a system to be set up for overnight charging versus continuous charging through a custom, high-amp vehicle alternator and heavy-gauge wiring system

Order Information

| Model Number | Max GPM | Max L/min | Max PSI | Max BAR | Max RPM | Motor Type | Pressure Switch | Ports |
|--------------|--------------------------------|-----------|---------|---------|---------|-----------------------------------|-----------------------------|---------|
| 2132P-D183 | 2.5 | 9.5 | 150 | 10.3 | 2200 | 1/4 HP 12V DC Motor, 20 amps | 150-250 PSI (10.3-17.2 BAR) | 1" MNPT |
| 2132P-D355 | 2.8 | 10.6 | 250 | 17.2 | 2000 | 1/2 HP 12V DC Motor, 35 amps | 150-250 PSI (10.3-17.2 BAR) | |
| 2132P-D359 | 3.9 | 14.8 | 200 | 13.8 | 2000 | 1/2 HP 12V DC Motor, 35 amps | 150-250 PSI (10.3-17.2 BAR) | |
| 2132P-D395 | 2.9 | 11.0 | 250 | 17.2 | 2000 | 1/2 HP 12V DC Motor, 39 amps | 150-250 PSI (10.3-17.2 BAR) | |
| 2132P-D399 | 4.0 | 15.1 | 200 | 13.8 | 2000 | 1/2 HP 12V DC Motor, 39 amps | 150-250 PSI (10.3-17.2 BAR) | |
| 2133P-D355 | 2.8 | 10.6 | 300 | 20.7 | 2000 | 1/2 HP 12V DC Motor, 35 amps | 250-350 PSI (17.2-24.1 BAR) | |
| 2133P-D395 | 2.9 | 11.0 | 300 | 20.7 | 2000 | 1/2 HP 12V DC Motor, 56C, 39 amps | 250-350 PSI (17.2-24.1 BAR) | |
| 2132PX | Replacement pump head & switch | | | | | | 150-250 PSI (10.3-17.2 BAR) | |
| 2133PX | Replacement pump head & switch | | | | | | 250-350 PSI (17.2-24.1 BAR) | |

Performance

| Model Number | 0 PSI / 0 BAR | | 50 PSI / 3.5 BAR | | 100 PSI / 6.9 BAR | | 150 PSI / 10.3 BAR | | 200 PSI / 13.8 BAR | | 250 PSI / 17.2 BAR | | 300 PSI / 20.7 BAR | |
|-------------------------|---------------|------|------------------|------|-------------------|--------|--------------------|--------|--------------------|--------|--------------------|--------|--------------------|--------|
| | GPM | AMPS | GPM | AMPS | GPM | AMPS | GPM | AMPS | GPM | AMPS | GPM | AMPS | GPM | AMPS |
| | L / min | | L / min | | L / min | | L / min | | L / min | | L / min | | L / min | |
| 2132P-D183 ¹ | 2.5 | 5.2 | 2.2 | 9.8 | 2.0 | 14.6 * | 1.8 | 19.3 * | - | - | - | - | - | - |
| | 9.5 | | 8.3 | | 7.6 | | 6.8 | | - | | - | | | |
| 2132P-D355 ¹ | 2.8 | 9.1 | 2.5 | 13.4 | 2.4 | 18.9 | 2.3 | 23.5 | 2.2 | 27.5 * | 2.1 | 30.9 * | 2.0 | 34.8 * |
| | 10.6 | | 9.5 | | 9.1 | | 8.7 | | 8.3 | | 7.9 | | 7.6 | |
| 2133P-D355 ¹ | 3.9 | 11.6 | 3.2 | 17.2 | 3.1 | 21.5 | 3.0 | 26.2 * | 2.8 | 31.8 * | - | - | - | - |
| | 14.8 | | 12.1 | | 11.7 | | 11.4 | | 10.6 | | - | | | |
| 2132P-D395 ¹ | 2.9 | 8.3 | 2.5 | 13.0 | 2.4 | 19.0 | 2.3 | 23.5 | 2.2 | 27.2 | 2.1 | 30.7 | 2.0 | 33.9 |
| | 11.0 | | 9.5 | | 9.1 | | 8.7 | | 8.3 | | 7.9 | | 7.6 | |
| 2133P-D395 ¹ | 4.0 | 11.0 | 3.5 | 17.2 | 3.3 | 24.0 | 3.1 | 29.3 | 3.0 | 34.2 | - | - | - | - |
| | 15.1 | | 13.2 | | 12.5 | | 11.7 | | 11.4 | | - | | | |

* indicates intermittent duty only ¹ Tested at 13.5 VDC ² Tested at 110 VAC