

09/00

Hy-Line & Ultima PERFORMANCE DATA SHEET


9.5208.FI

SIZE: 52

SEAL TYPES: ALL

POLISH: 0,Y

ROTORS CODE: 8


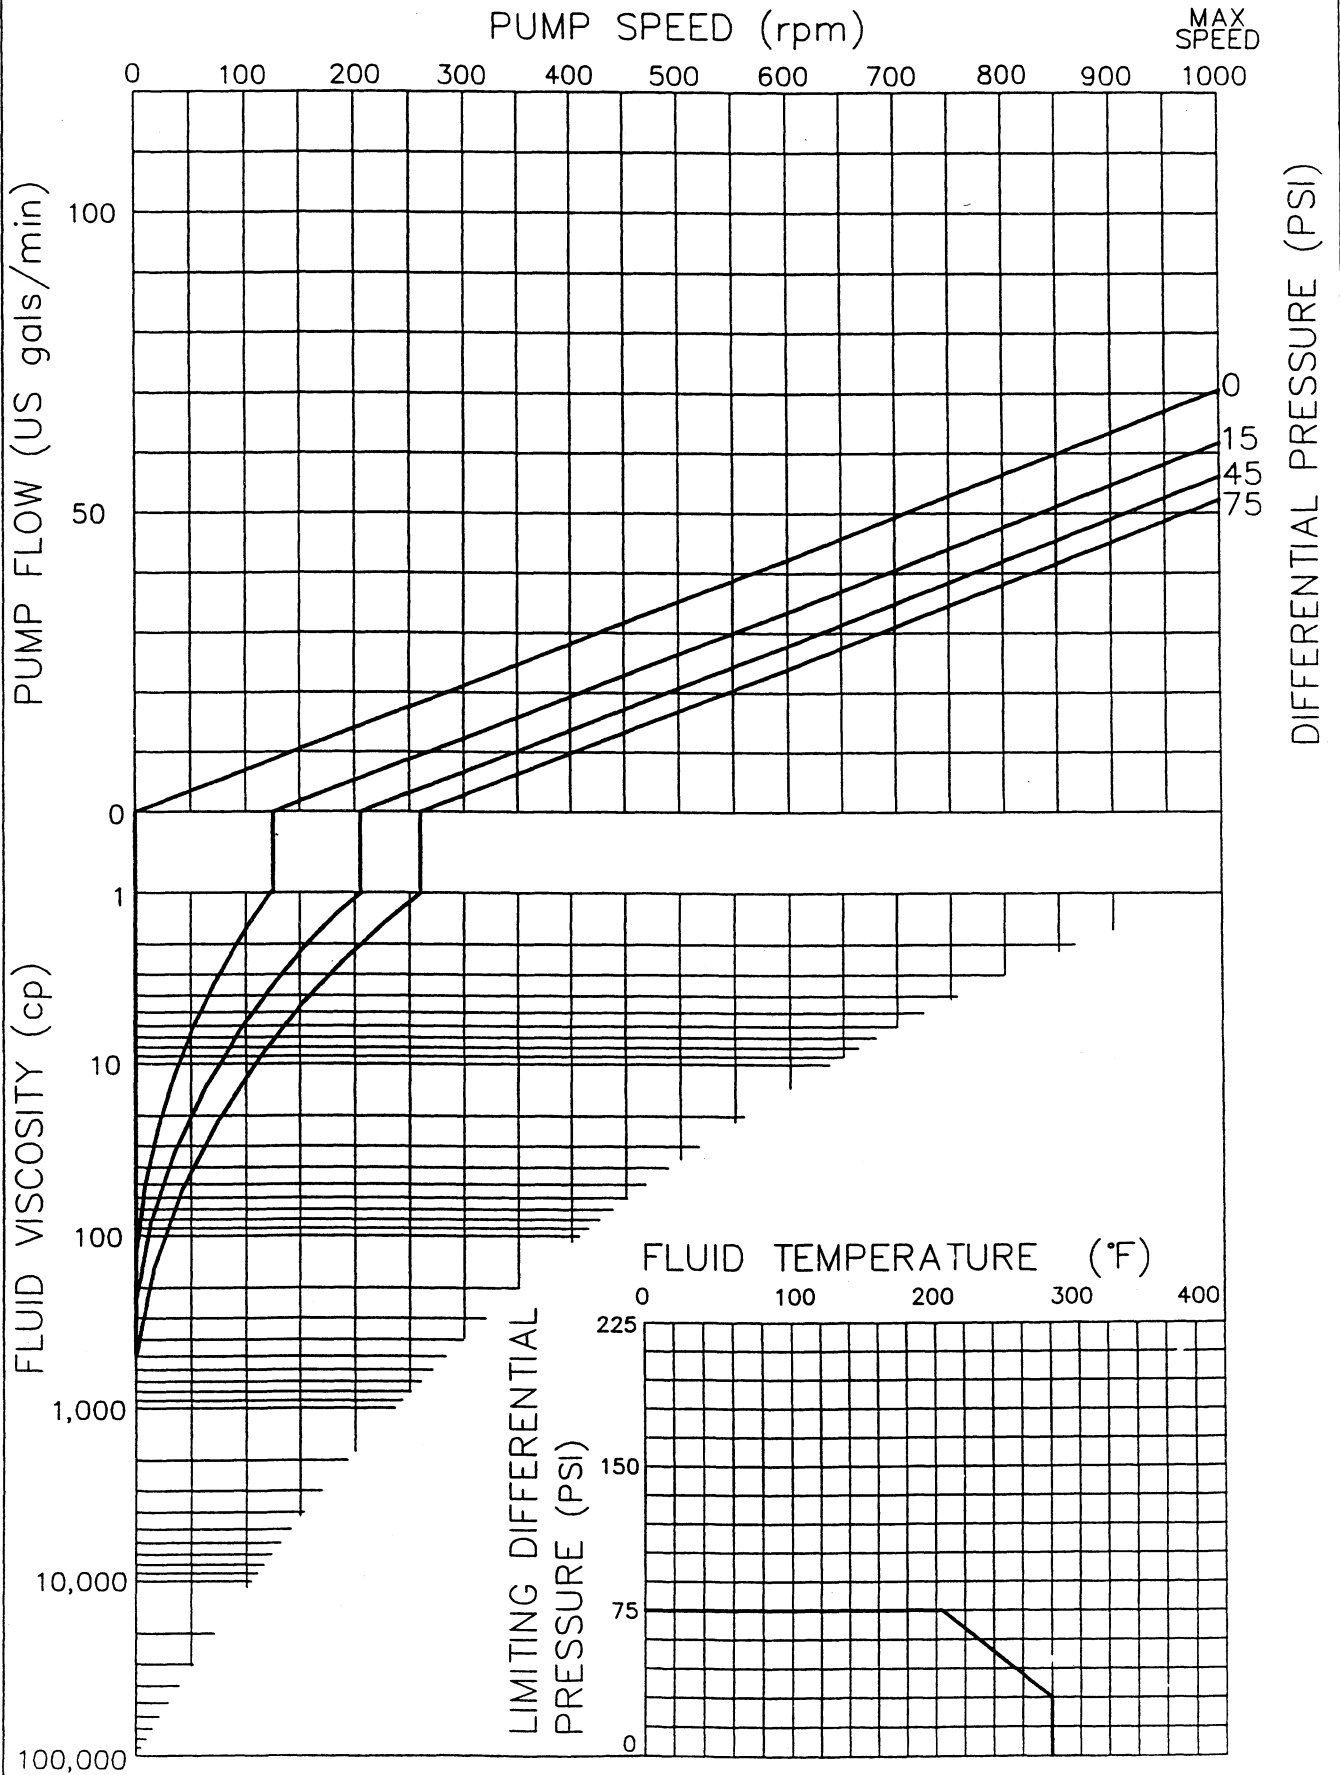


SIZE: 52

SEAL TYPES: ALL

POLISH: 0,Y

ROTORS CODE: 8

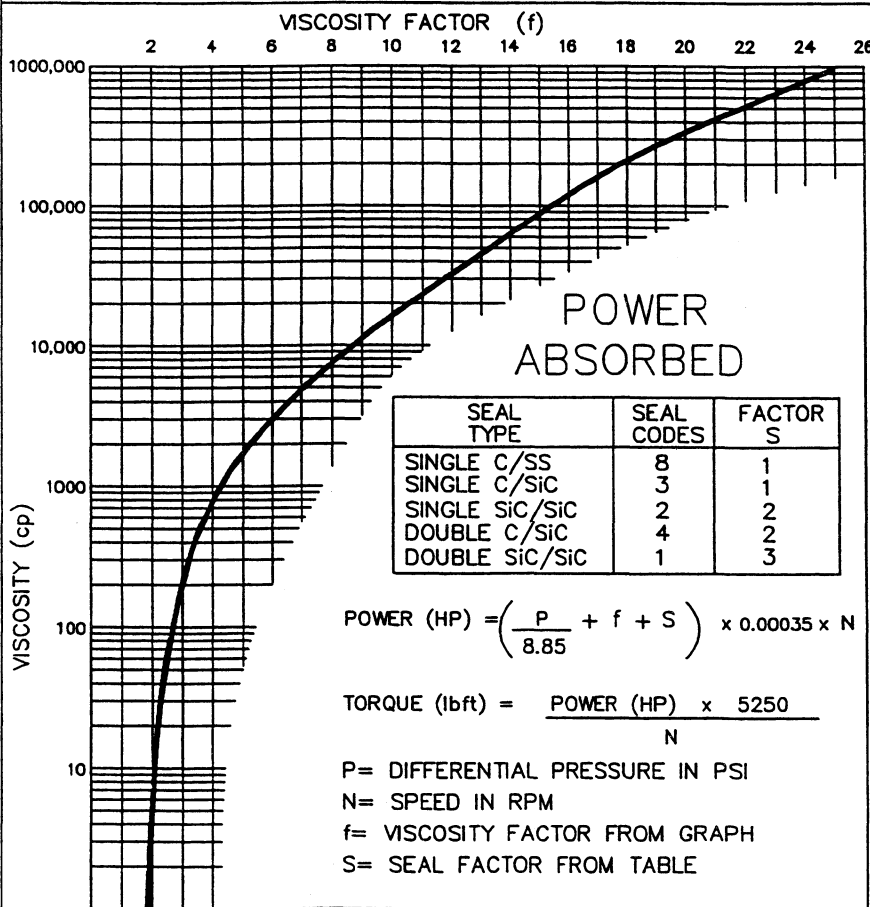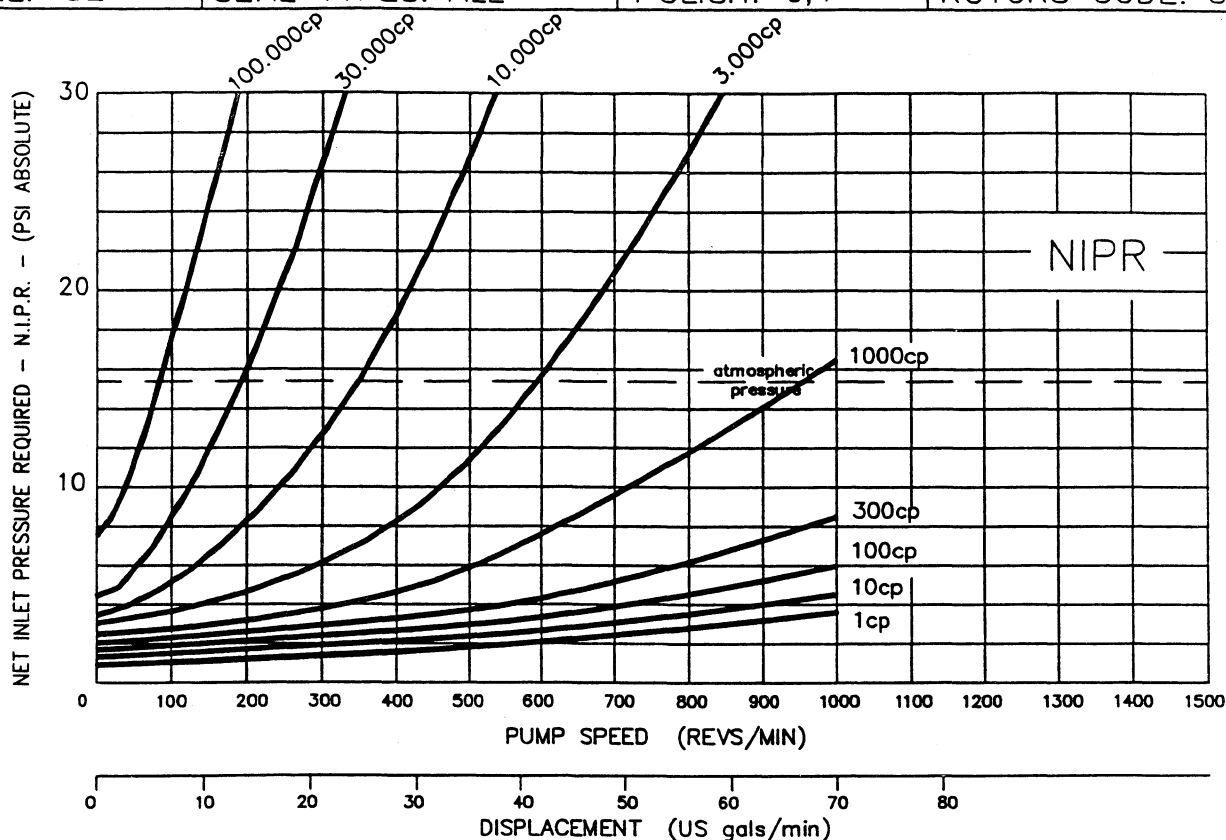

APPLICATION DATA

MAX INPUT SHAFT TORQUE (lbft) 110  
 MAX SHAFT RADIAL LOAD (lb) 506  
 MAX SOFT PARTICLE DIA (in) 0.6  
 DISPLACEMENT (cubic in/rev) 16  
 DISPLACEMENT (US gals/100revs) 7

PHYSICAL DATA

PUMP WEIGHT HY~LINE (lb) 70  
 PUMP WEIGHT ULTIMA (lb) 85  
 OIL CAPACITY (cubic in) 67  
 HOLD UP VOLUME (cubic in) 28

TIGHTENING TORQUES (lbft)

END COVER BOLTS 15  
 ROTOR RETAINER SCREWS (HY~LINE) 40  
 ROTOR CASE SCREWS 15  
 GEAR COVER SCREWS 8  
 GEAR NUTS 75  
 ROTOR TIE ROD NUTS (ULTIMA) 30

ROTOR CLEARANCES (in)

FRONT, ROTOR TO END COVER 0.005  
 RADIAL, ROTOR TO ROTOR CASE 0.005  
 MESH, LOBE TO LOBE - MIN 0.005

Jabsco



USA Jabsco  
 1485 Dale Way  
 Costa Mesa  
 CA 92628-2158  
 Tel: +1 714 545 8251  
 Fax: +1 714 957 0609

UK Jabsco  
 Bingley Road  
 Hoddesdon  
 Hertfordshire, EN11 0BU  
 Tel: +44 (0) 1992 450 145  
 Fax: +44 (0) 1992 467 132

GERMANY Jabsco GmbH  
 Oststraße 28  
 22844 Norderstedt  
 Tel: +49 (0) 40 53 53 73 0  
 Fax: +49 (0) 40 53 53 73 11