

NK-1 SERIES



Features

- Corrosion resistant nylon body
- Oil-filled motor
- 10.2' maximum lift
- 70 watts
- 1/4" MNPT discharge
- Thermal overload protection
- For submersible use only


Construction


- Motor 1/150 HP Oil Filled
- Intermittent Liquid Temp. up to 120° F
- Intake N/A
- Discharge 1/4" MNPT
- Housing Nylon
- Cover Nylon
- Volute Nylon
- Impeller Nylon
- Shaft Seal Viton®
- Screen Polyethylene

Small submersible oil-filled pump with corrosion resistant nylon housing. For commercial, industrial and home applications including statuary fountains, water displays, air conditioners, machine tool coolants, and many other applications where liquid must be transferred or recirculated. This compact 210 GPH pump features a 1/4" MNPT discharge, 10.2' shut-off head capability, and screened inlet.

Little Clant Rump Co.


NK-1 SERIES





Specifications

								Performance (GPH @ Head)			Shut Off		Pwr. Cord Weight	
Model No.	Item No.	Discharge Size	HP	Volts	Hertz	Amps	Watts	1'	3'	5'	Feet	PSI	(ft)	(Lbs.)
NK-1	526003	1/4" MNPT	1/150	115	60	1.1	70	210	180	150	10.2	4.4	6	3.67

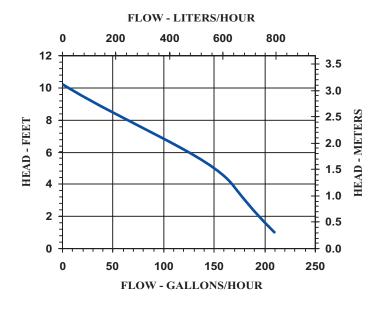

Replacement Parts

Volute	116375					
Impeller	116437					
Screen	101376					
Seal Ring	928007					
Back Plate	126377					
Elbow	943076					

Little Giant Pump Co.

PO Box 12010 Phone: 405.947.2511 Okla. City, OK 73157 Fax: 405.228.1550 **www.LittleGiantPump.com**