


\*Dimensions and illustrations are approximate and for reference only.

**Sequence® 1000 Series - Model 3300SEQ21**

The Classic. The 1000 series has set the standard by which all others are measured. Perfect blend of medium pressure and ample flow for the majority of ponds.

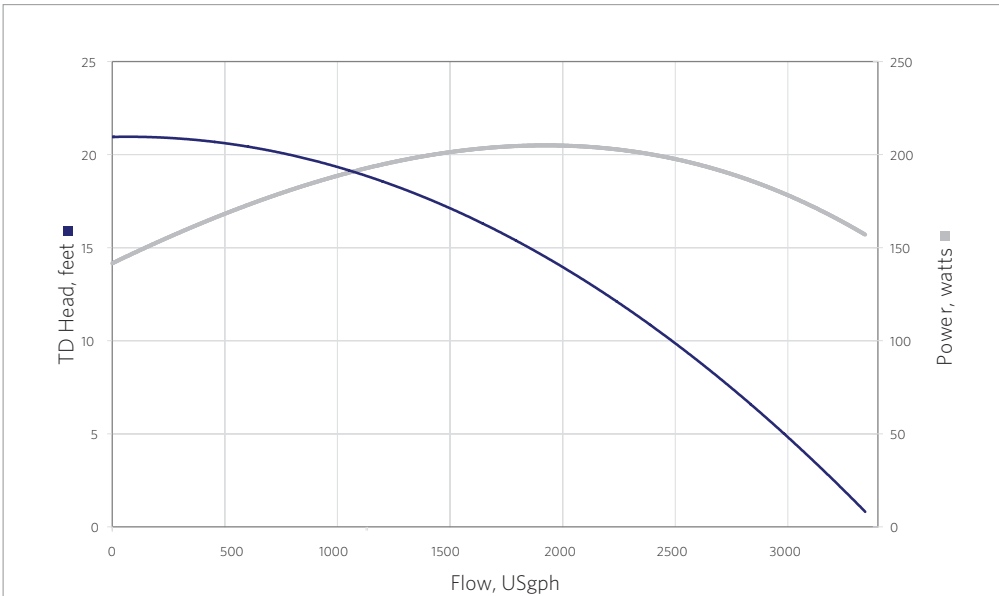

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	51	45	38	28	13
GPH	3060	2700	2280	1680	780



**5 YEAR LIMITED WARRANTY**





**8 FOOT CORD SET**



**TEFC FAN COOLED MOTOR**

MODEL	3300SEQ21
INLET	1.5"
DISCHARGE	1.5"
MAX FLOW (gph)	3300
MAX HEAD (feet)	21'
MAX POWER (watts)	206
MAX CURRENT (amps)	2.36
@ (volts)	115/230
MOTOR HP	1/3, 1/4, 1/6, 1/8
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	4




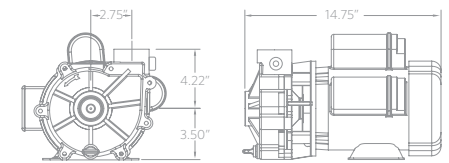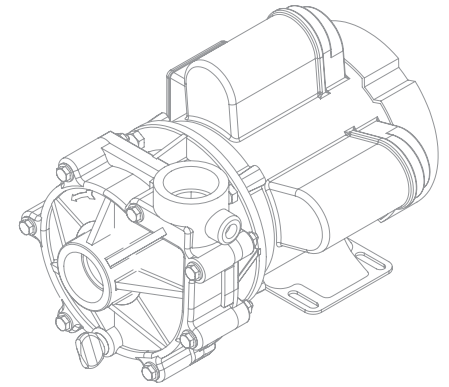

\*Dimensions and illustrations are approximate and for reference only.

**Sequence® 1000 Series - Model 4500SEQ21**

The Classic. The 1000 series has set the standard by which all others are measured. Perfect blend of medium pressure and ample flow for the majority of ponds.

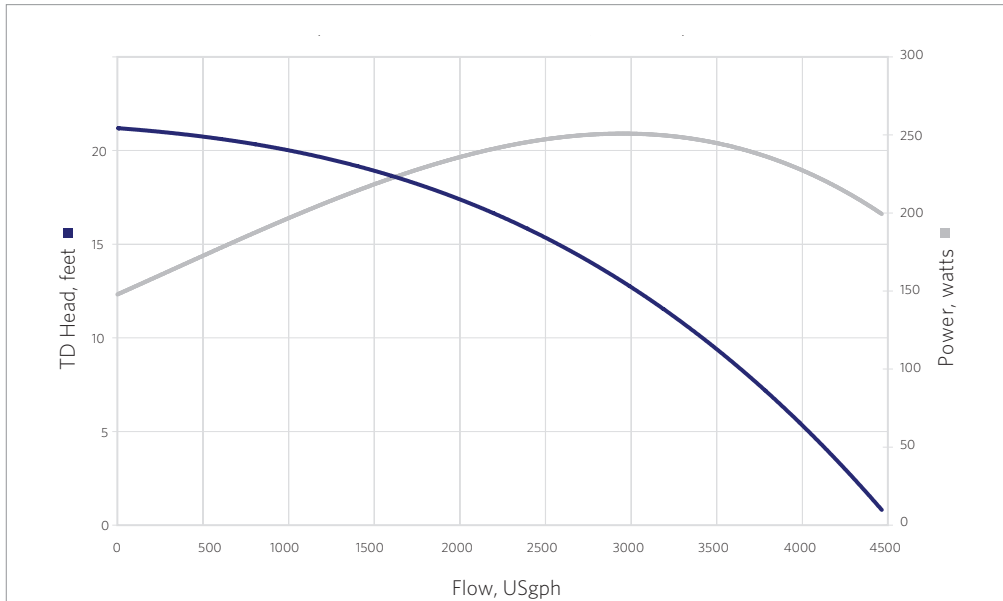

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	69	61	53	40	17
GPH	4140	3660	3180	2400	1020



**5 YEAR LIMITED WARRANTY**





**8 FOOT CORD SET**



**TEFC FAN COOLED MOTOR**

MODEL	4500SEQ21
INLET	1.5"
DISCHARGE	1.5"
MAX FLOW (gph)	4500
MAX HEAD (feet)	21'
MAX POWER (watts)	250
MAX CURRENT (amps)	2.69
@ (volts)	115/230
MOTOR HP	1/3, 1/4, 1/6, 1/8
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	5




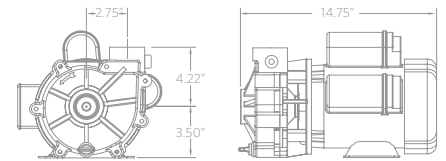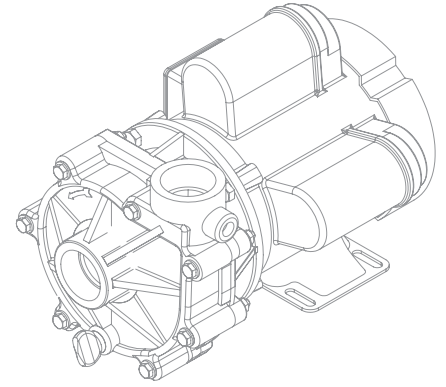

\*Dimensions and illustrations are approximate and for reference only.

**Sequence® 1000 Series - Model 5100SEQ22**

The Classic. The 1000 series has set the standard by which all others are measured. Perfect blend of medium pressure and ample flow for the majority of ponds.

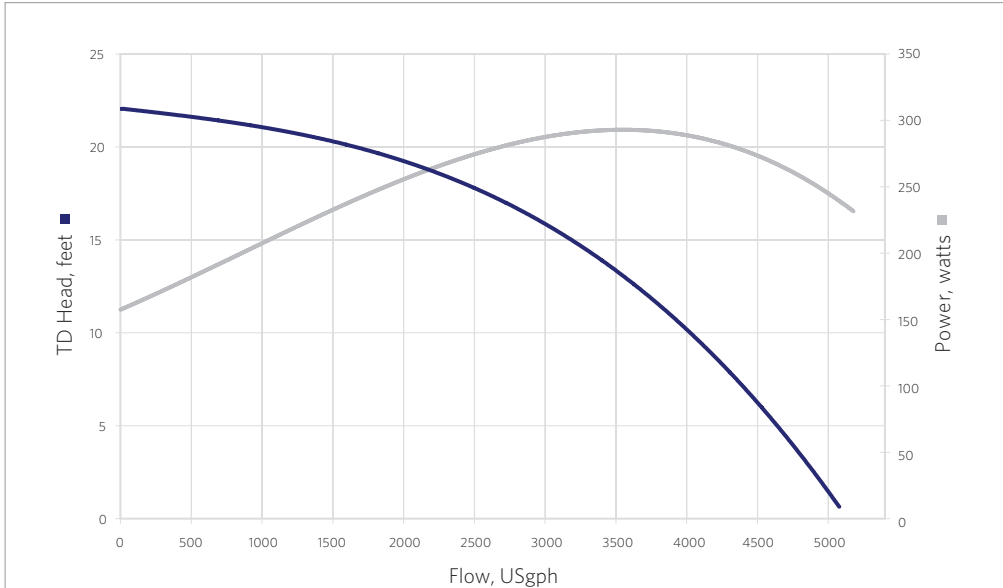

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	79	71	63	50	28
GPH	4740	4260	3780	3000	1680



5 YEAR LIMITED WARRANTY





8 FOOT CORD SET



TEFC FAN COOLED MOTOR

MODEL	5100SEQ22
INLET	1.5"
DISCHARGE	1.5"
MAX FLOW (gph)	5100
MAX HEAD (feet)	22'
MAX POWER (watts)	293
MAX CURRENT (amps)	3.03
@ (volts)	115/230
MOTOR HP	1/3, 1/4, 1/6, 1/8
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	6




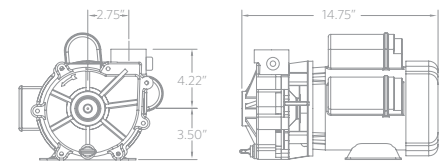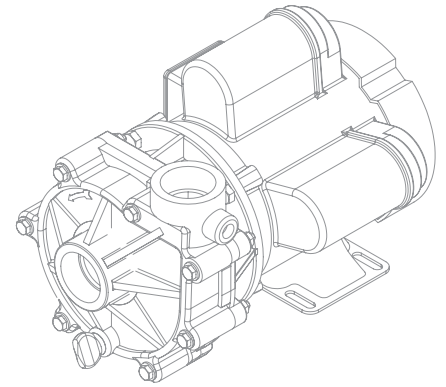

\*Dimensions and illustrations are approximate and for reference only.

**Sequence® 1000 Series - Model 6100SEQ23**

The Classic. The 1000 series has set the standard by which all others are measured. Perfect blend of medium pressure and ample flow for the majority of ponds.

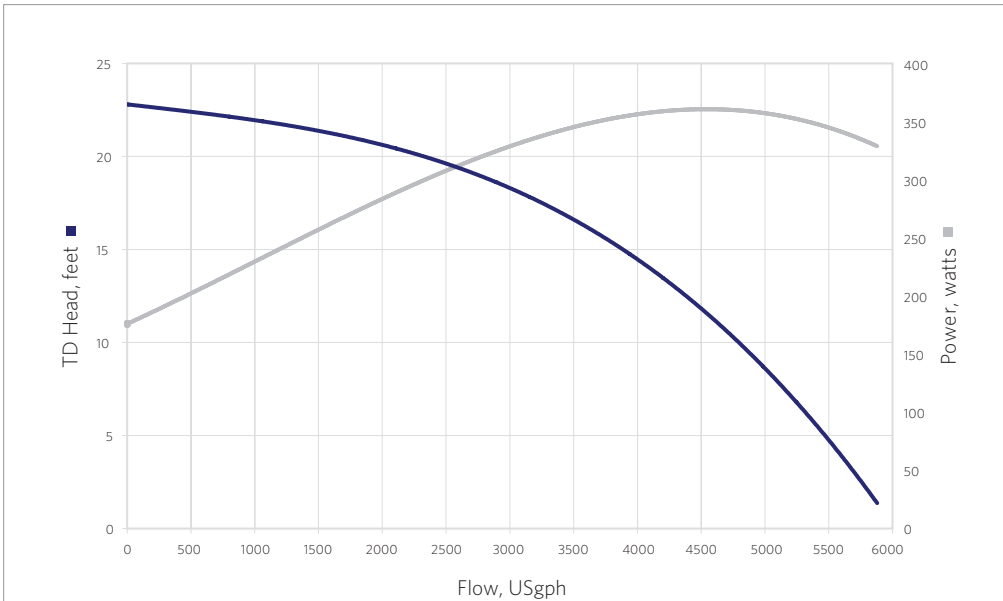

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	93	85	75	60	40
GPH	5580	5100	4500	3600	2400



5 YEAR LIMITED WARRANTY



8 FOOT CORD SET



TEFC FAN COOLED MOTOR

MODEL	6100SEQ23
INLET	1.5"
DISCHARGE	1.5"
MAX FLOW (gph)	6100
MAX HEAD (feet)	23'
MAX POWER (watts)	366
MAX CURRENT (amps)	3.03
@ (volts)	115/230
MOTOR HP	1/3, 1/4, 1/6, 1/8
MOTOR TYPE	56J
MOTOR ENCLOSURE	TEFC
IMPELLER	7

