





SUCTION SHOE DESIGN

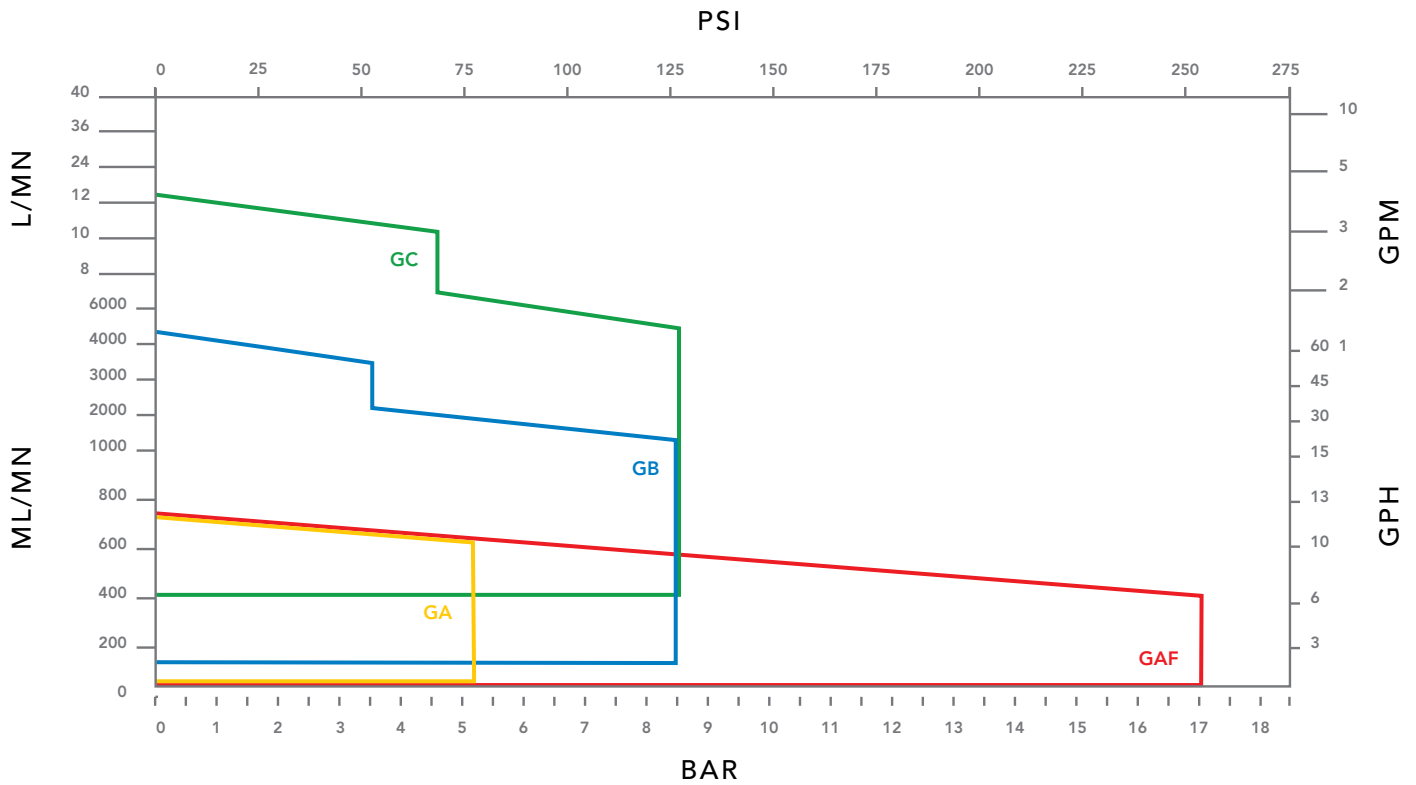

CAVITY DESIGN

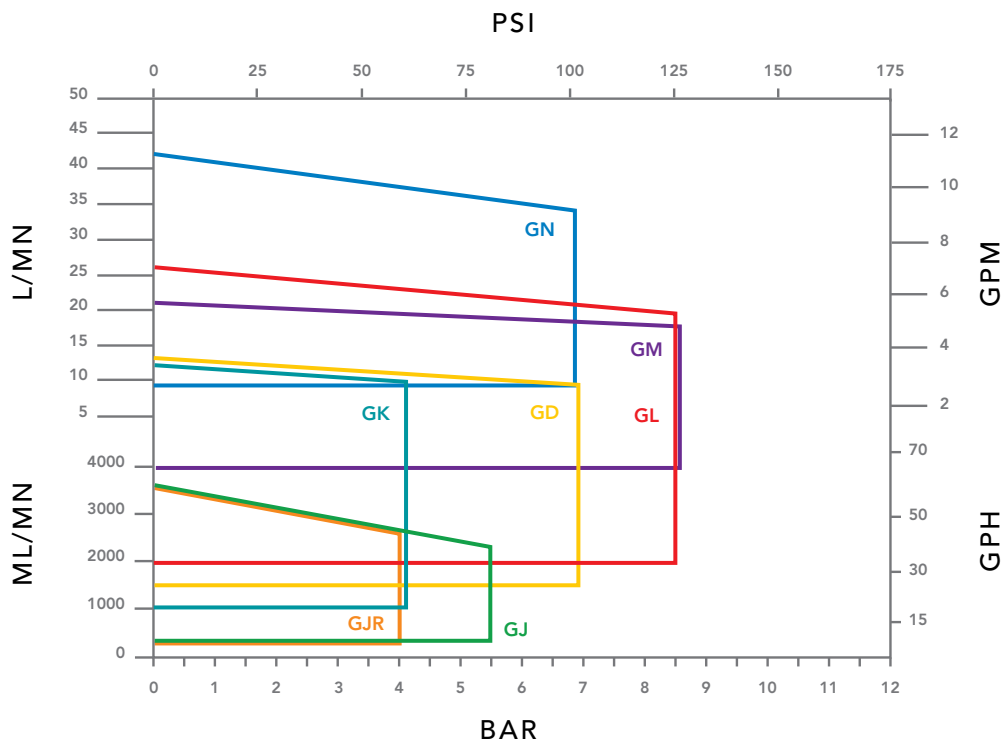



SERIES GA/GAF

- ▶ Maximum Flow Rate: 0.736 L/min (0.19 GPM)
- ▶ Maximum Differential Pressure: 5.2 bar (75 psi) / 17 bar (250 psi)



SERIES GB

- ▶ Maximum Flow Rate: 4.7 L/min (1.2 GPM)
- ▶ Maximum Differential Pressure: 8.6 bar (125 psi)



SERIES GC

- ▶ Maximum Flow Rate: 13.9 L/min (3.7 GPM)
- ▶ Maximum Differential Pressure: 8.6 bar (125 psi)



SERIES GJ/GJR

- ▶ Maximum Flow Rate: 3.6 L/min (0.96 GPM)
- ▶ Maximum Differential Pressure: 5.5 bar (80 psi) / 4.0 bar (58 psi)



SERIES GD

- ▶ Maximum Flow Rate: 13.9 L/min (3.7 GPM)
- ▶ Maximum Differential Pressure: 6.9 bar (100 psi)



SERIES GK

- ▶ Maximum Flow Rate: 12.6 L/min (3.3 GPM)
- ▶ Maximum Differential Pressure: 4.1 bar (60 psi)



SERIES GL

- ▶ Maximum Flow Rate: 26.6 L/min (7.0 GPM)
- ▶ Maximum Differential Pressure: 8.6 bar (125 psi)



SERIES GM

- ▶ Maximum Flow Rate: 21.3 L/min (5.6 GPM)
- ▶ Maximum Differential Pressure: 8.6 bar (125 psi)



SERIES GN

- ▶ Maximum Flow Rate: 42.8 L/min (11.3 GPM)
- ▶ Maximum Differential Pressure: 6.9 bar (100 psi)