
ROTARY GEAR PUMP BRONZE



MODELS N11HDP N11HDL N11HDM

1 /1/4" NPT PORTS

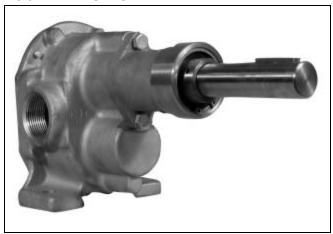

STANDARD								
Pump	Seal Conversion							
No.	Type	Kit No.						
N11HDP	Packing	Acrylic-Graphite	11021					
N11HDL	Lip	Viton(R)*-Teflon(R)*	11023					
N11HDM	Mechanical	Buna N-Ceramic	11025					

SPECIAL									
Pump	Seal Convers								
No.	Type	Kit No.							
N11HDP-1	Packing	Viton(R)*	11022						
N11HDLS3	Lip	Buna N	11024						
N11HDMS7	Mechanical	Vitont*-Ceramic	11026						

FEATURES

- q All Bronze Castings and Stainless Steel Shafts
- g Sealing Arrangement Interchangeable in Field with Proper Kit
- q Outboard Ball Bearing Support
- g Self Lubricating Carbon Bearings

SERVICE WEAR FACTORS


SPEED - High speed accelerates wear. For longer service life, keep speed as low as possible. Pump speeds above 900 R.P.M. not recommended except for intermittent duty and pressures below 100 p.s.i.

PRESSURE - High pressure accelerates wear. For longer service life keep pressure as low as possible.

LIQUID TEMPERATURE - High temperature accelerates wear. Keep as close to room temperature as possible.

LIQUID CONTAMINATION - Impurities like fine abrasive silt or sand accelerate wear. Keep liquid as clean as possible.

LIQUID LUBRICITY - Lubricants increase service life many fold. Use lubricant additives whenever possible.

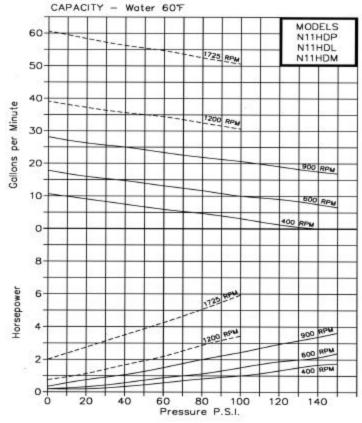

Note: Dotted lines(---) recommended for intermittent duty only due to accelerated wear at higher speeds and pressures.

NOISE - Large gear pumps are inherently noisy due to metal to metal gear contact. Make installations far removed from offices or other relatively quiet people areas. Some noise reduction can be realized by lowering pump speed and use of isolation mounts and lines, usually the small amount of noise reduction achieved does not justify the effort and expense.

DRIVE & ALIGNMENT- Direct drive is the recommended drive arrangement. This pump is suitable for belt drive applications without needing pillow block bearings to achieve acceptable pump life. Correct alignment is absolutely essential for satisfactory pump life. Recheck alignment after piping has been connected to the pump.

SEAL CONVERSION KITS

Seal conversion kits, illustrated (on back) are designed for quick removal and replacement. In each case, seal housings are fastened to pump bodies by means of 2 bolts, item 13. IMPORTANT - before attempting to remove a seal housing containing seal components by sliding them off the pump shaft, be sure to unlock the 2 set screws locking the ball bearing inner race to the pump shaft. The ball bearing is identified as item 20. Also, before attempting to slide the seal housing from the pump shaft, remove all burrs, scale, and projections that could be formed by fretting corrosion.

^{*} Viton(R)* is a registered trademark of DuPont Dow Elastomers. Viton(R) or equivalent FKM will be used. Teflon(R)* is a registered trademark of DuPont. Teflon(R) or equivalent PTFE will be used.

ROTARY GEAR PUMP BRONZE



EXPLODED VIEW AND PARTS LIST


	1	2	3*	4*	5*	6*	7*	8*	9*	10	11*	12*	13
Pump	Cover	Screw	Snap	O-Ring	Bearing	Drive	Drive	ldle	ldle	Body	O-Ring	Packing	Screw
No.			Ring			Gear	Shaft	Shaft	Gear			Ring	
	1 Reqd	8 Reqd	4 Reqd	1 Reqd	4 Reqd	1 Reqd	1 Reqd	1 Reqd	1 Reqd	1 Reqd	1 Reqd	4 Reqd	2 Reqd
N11HDP	9333NN5N	5393	7651	9797-158	5108	9833	7366	7652	9834	9331NG7N	6515	7624	5916
N11HDL	9333NN5N	5393	7651	9797-158	5108	9833	7366	7652	9834	9331NG7N	6515	_	5916
N11HDM	9333NN5N	5393	7651	9797-158	5108	9833	7366	7652	9834	9331NG7N	6515		5916

	14	15	16	17	18*	19	20	21	22*	23	24	25*	26	
Pump	Nut	Gland	Screw	Seal	Lip	Snap Ring	Ball	Key	Lip	Seal	Ring	Seal	Dowel	
No.				Housing	Seal		Bearing		Seal	Housing		Assy.	Pin	Repair
	2 Reqd	1 Reqd	2 Reqd	1 Reqd	1 Reqd	2 Reqd(P)	1 Reqd	3 Reqd	1 Reqd	1 Reqd	1 Reqd	1 Reqd	2 Reqd	Kit No.
						1 Reqd (L&M)								
N11HDP	5597	7451	6743	7449	6710	7372	7368	6518				-	8597	11003
N11HDL						7372	7368	6518	7262	7365		-	8597	11005
N11HDM						7372	7368	6518		7365	7651	32315	8597	11007


VARIATIONS

Pump	12*	22*	25*	
No.	Packing	Lip	Seal	Repair
	Ring	Seal	Assy.	Kit
	4 Req'd	1 Req'd	1 Req'd	
N11HDP-1	7450			11004
N11HDLS3	-	6500		11006
N11HDMS7	_		32372	11008


PACKING SEAL END



LIP SEAL END




MECHANICAL SEAL END



*Repair Kits include parts 3, 4, 5, 6, 7, 8, 9, 11, 12, 18, 22 & 25

DIMENSIONS

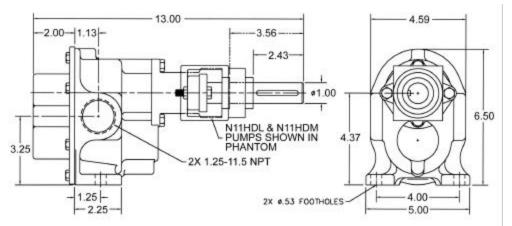

© 7 2

Specifications are subject to change without notice.