


MOTORPUMP™ — 1750 RPM
60 HERTZ, 7.5 X 4.5 FLANGE X 3 NPT
KAVF 56

56
JM
KAVF 56


MOTOR DIMENSIONS
NEMA JM FRAME 3 PHASE ODP

HP	FRAME	D	F	O	AB	BG	L
2	JM145	3.50	2.50	7.00	5.25	5.38	4.69
3	JM182	4.50	2.25	9.00	5.88	5.88	4.94
5	JM184	4.50	2.75	9.00	5.88	6.38	5.44

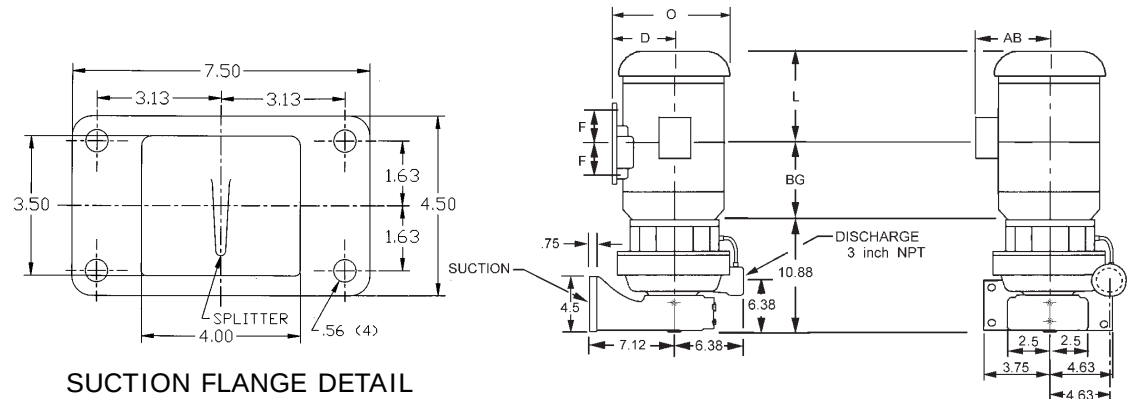

SUCTION FLANGE DETAIL

ALL DIMENSIONS IN INCHES

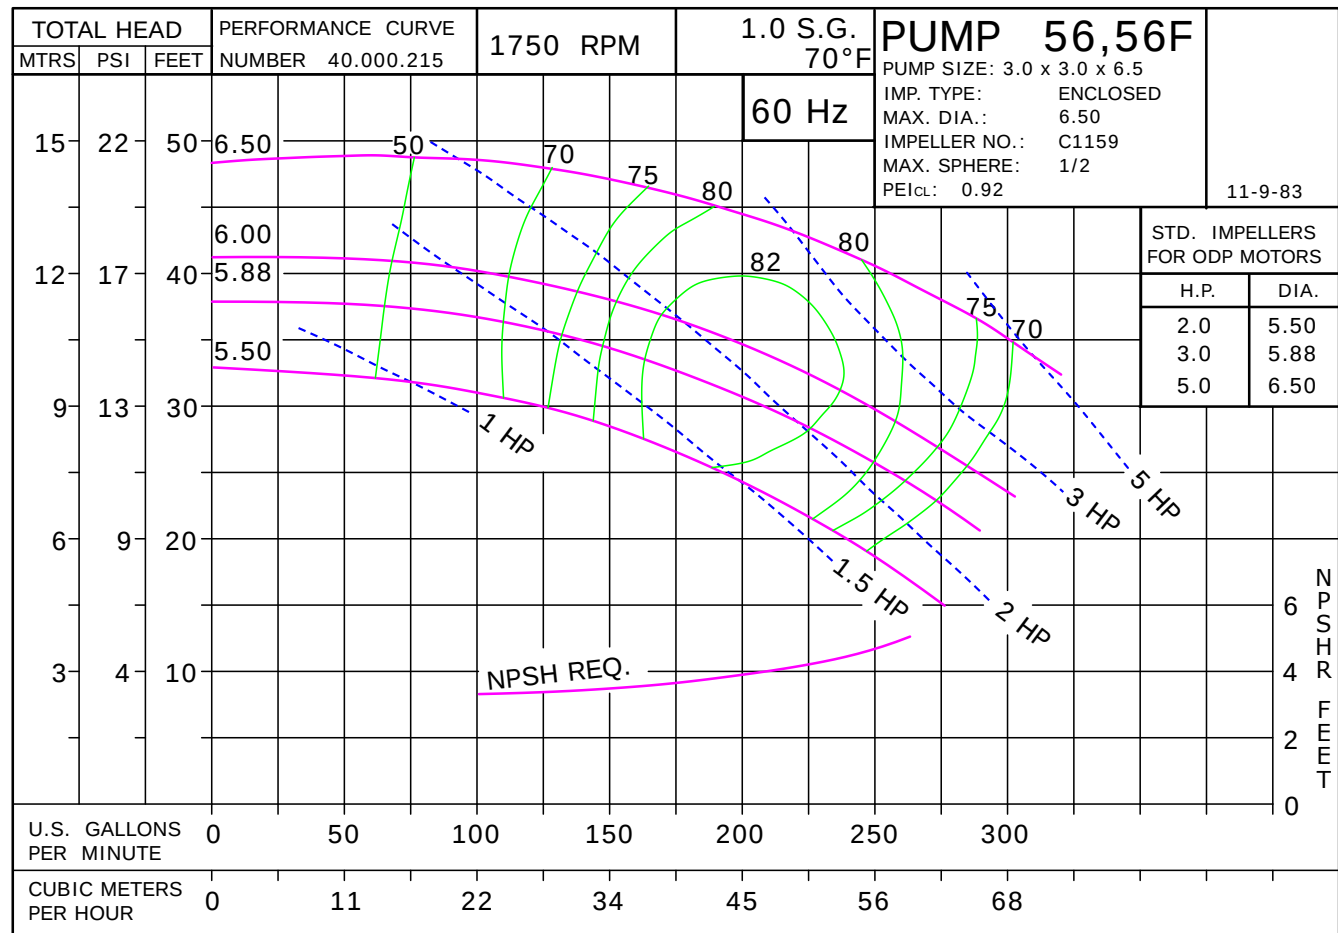

D1250
0563AVF

D1337
0561750


56

JM
KAVF 56 056MKAVF
81.001.572 M19

056MKAVF

81.001.572 M19

KAVF 56 • Iron • JM Frame • 1750 RPM

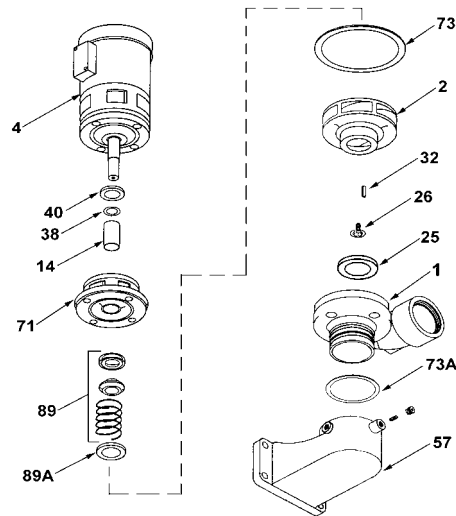

E1062

KEY NO.	PART NAME	KAVF 56
1	CASE, IRON, 3.75 TRN x 3 NPT Includes Bronze Wear Ring Key #25, and Suction Gasket Key #73A. For Steel Wear Ring, Replace Suffix "X" with "X1"	130.000.349X
2	IMPELLER, ENCLOSED, SPECIFY DIAMETER: IRON BRONZE	131.000.809 137.000.108
4	MOTOR: JM140/180	See Chart
14*	SHAFT SLEEVE BRONZE STAINLESS	110.000.178 110.000.192
25	WEAR RING BRONZE STEEL	103.000.138 103.000.152
26*	IMPELLER RETAINER, STAINLESS	118.000.163A
32*	KEY, STAINLESS	102.000.102
38*	O-RING, SHAFT BUNA VITON	116.000.117 116.000.105
40*	FLINGER, STAINLESS	104.000.165
57	FLANGE, IRON, 7½" x 4½" Includes Flange Gasket (not shown), Set Screws and Plugs	132.000.198X
--	GASKET, FLANGE, (not shown)	116.000.126
71	ADAPTER, IRON JM140/180	132.000.202X
73*	GASKET, CASE	116.000.157
73A	GASKET, CASE SUCTION, BUNA	116.000.153
89*	SEALS: BN-CARB/CM VN-CARB/CM VN-CARB/SIL EPDM-CARB/SIL	101.000.168 101.000.191 101.000.175 101.000.175B
89A*	SEAL RETAINER, STAINLESS	104.000.174
--	REPAIR KITS: BN-CARB/CM SEAL VN-CARB/CM SEAL (S) VN-CARB/SIL SEAL EPDM-CARB/SIL SEAL	118.000.344 118.000.344A 118.000.344B 118.000.344C
* DENOTES COMPONENTS INCLUDED IN REPAIR KIT. ALL REPAIR KITS INCLUDE THE BRONZE SHAFT SLEEVE EXCEPT THE (S) INDICATED, WHICH IS STAINLESS WITH VITON SHAFT O-RING.		