



FRAMEPUMP™ — VARIABLE SPEED

FP 57


JM210

3334

1 3/8" SHAFT, 4 X 3 X 6.88 ANSI FLG

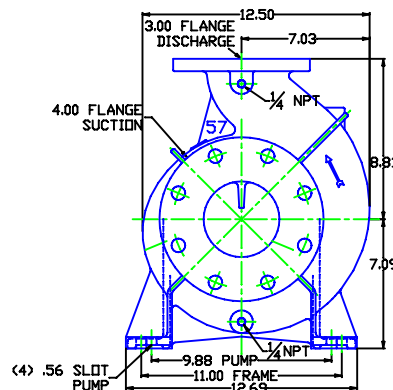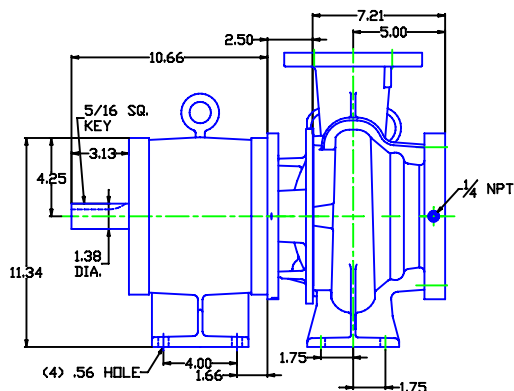

ALL DIMENSIONS IN INCHES

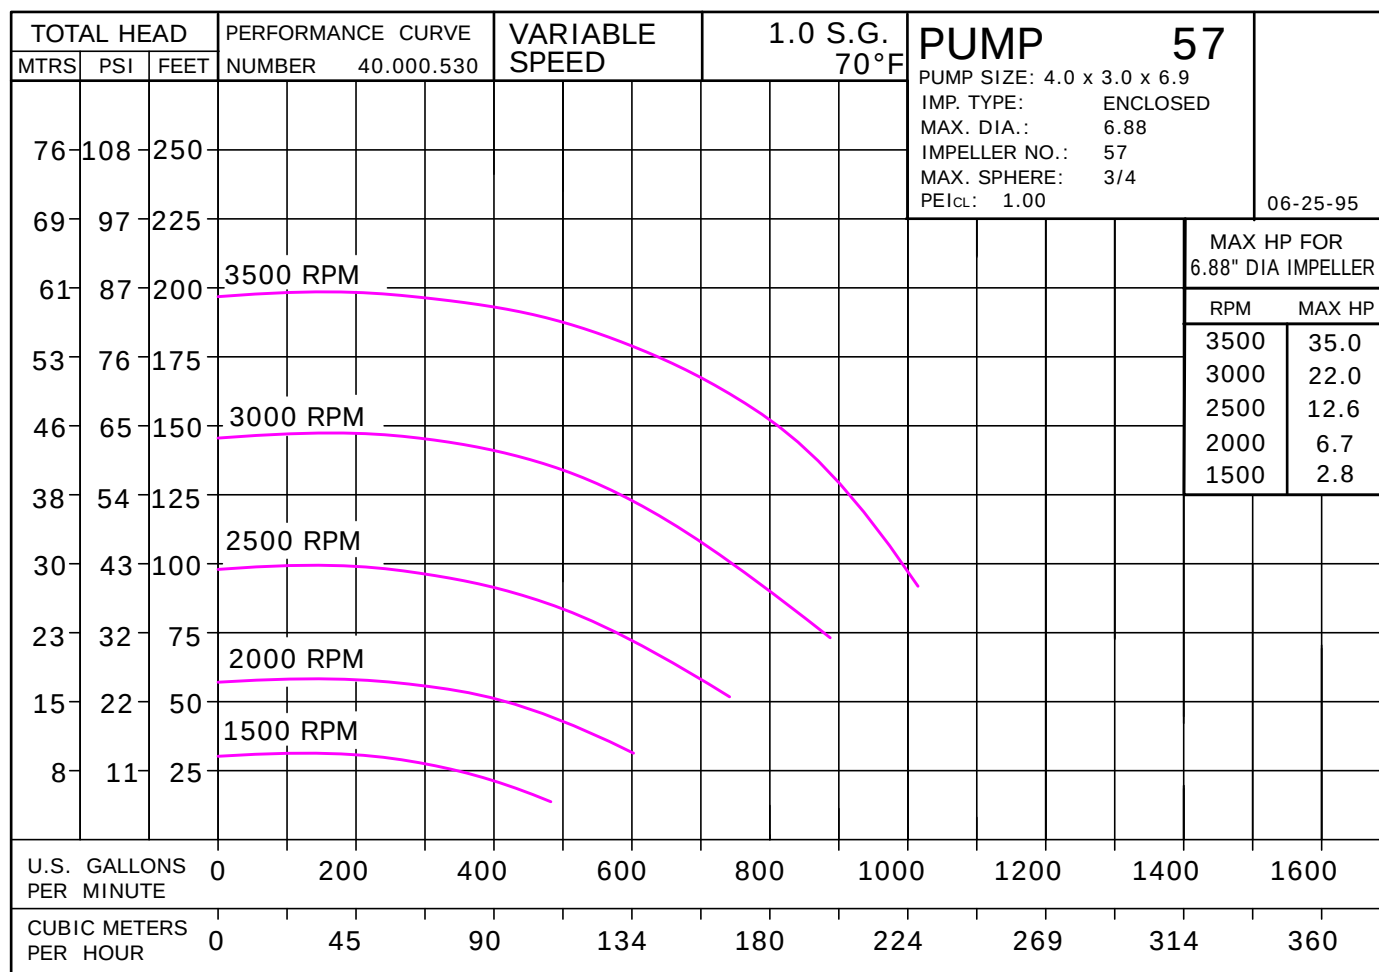


D057FPJM210
057JM210

057VS

FP 57
JM210

057JM210-A
81.001.280 M19

FP57 • Iron • 1 3/8" Shaft • JM210

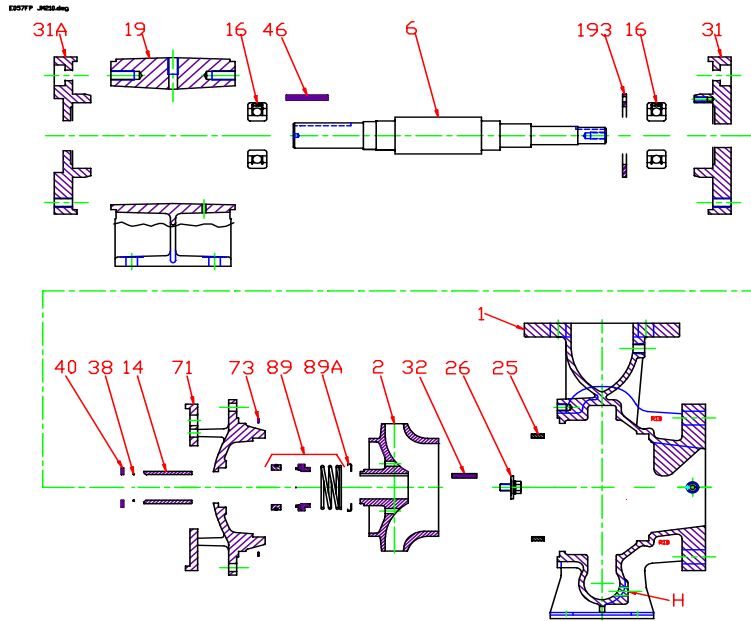

KEY NO.	PART NAME	FP 57
1+	CASE, IRON, 4 x 3 FLG	130.000.297X1
2	IMPELLER, 7/8" KEYED, ENCLOSED, 6.88" DIAMETER: IRON	131.000.709G
14*	SHAFT SLEEVE, STAINLESS	110.000.373
25	WEAR RING, STEEL	103.000.218
26*	IMPELLER RETAINER, STAINLESS	118.000.163A
32*	KEY, STAINLESS	102.000.256
38*	O-RING, SHAFT, VITON	116.000.105
40*	FLINGER	104.000.256
71	ADAPTER, IRON	132.000.338X1
73*	GASKET, CASE	116.000.273
89*	1½" SEALS:	
	TYPE 21, VN-CARB/CM	101.000.191
89A*	SEAL RETAINER	104.000.174
	BEARING FRAME ASS'Y CONSISTING OF:	JM210 118.000.332
6†	SHAFT, ASS'Y	135.000.227X
16	BEARING (2 REQ'D)	103.000.167
19	SHELL	132.000.276
31	END BRACKET	132.000.278
31A	END BRACKET	132.000.278A
46†	KEY	102.000.270E
193	RETAINER	110.000.315
--	REPAIR KITS:	
	VN-CARB/CM SEAL	118.000.383A

+ INCLUDES STEEL WEAR RING

* DENOTES COMPONENTS INCLUDED IN REPAIR KIT.


† DENOTES COMPONENTS INCLUDED WITH SHAFT ASSEMBLY

E057FPJM210

B17

P057JM210-A

FP 57 • Iron • 1 3/8" Shaft • JM210

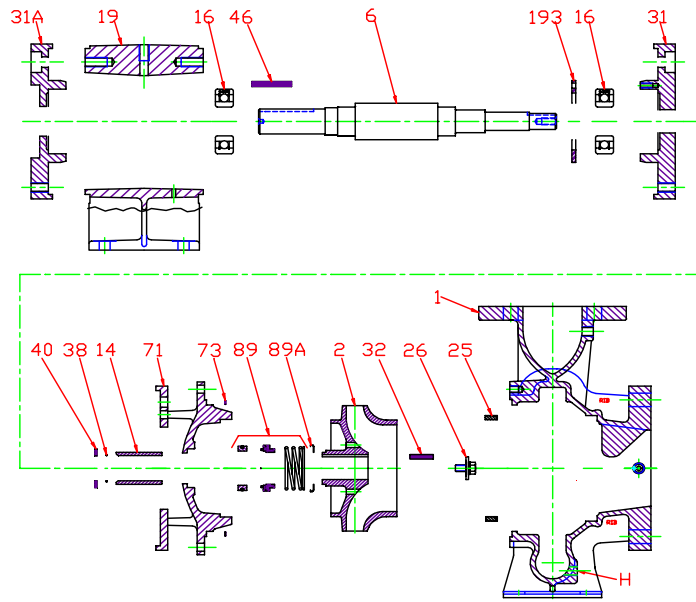

CONSTRUCTION OPTIONS		
KEY NO.	PART NAME	ALL IRON
1	Case	Iron
2	Impeller	Iron
6	Shaft Ass'y	Steel
14	Shaft Sleeve	Stainless
19	Shell	Iron
25	Wear Ring	Steel
26	Impeller Retainer	Stainless
31	End Bracket	Iron
31A	End Bracket	Iron
32	Key	Stainless
38	O-ring, Shaft	Viton
40	Flinger	Stainless
46	Key	Stainless
71	Adapter	Iron
73	Gasket, Case	Fiber
89	Mechanical Seal, Type 21 VN-CARB/CM	Standard
193	Retainer	Stainless

E057FPJM210

E15

C057JM210-A