

SCOT



FRAMEPUMP™ — 3500 RPM

1 1/8" SHAFT, 3 X 3 X 5.5 NPT


FP 75

JM140

3168

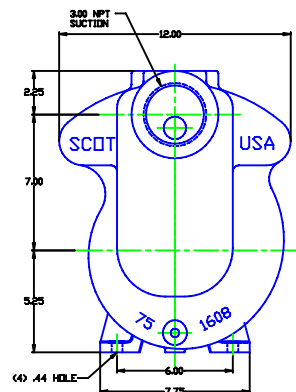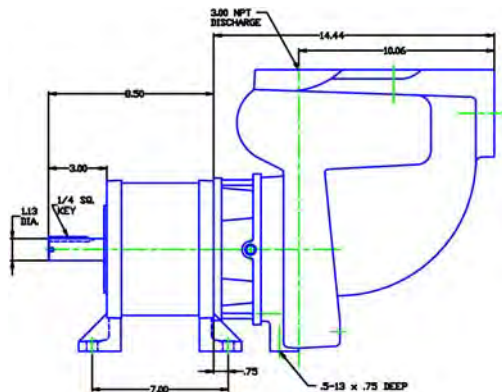

ALL DIMENSIONS IN INCHES

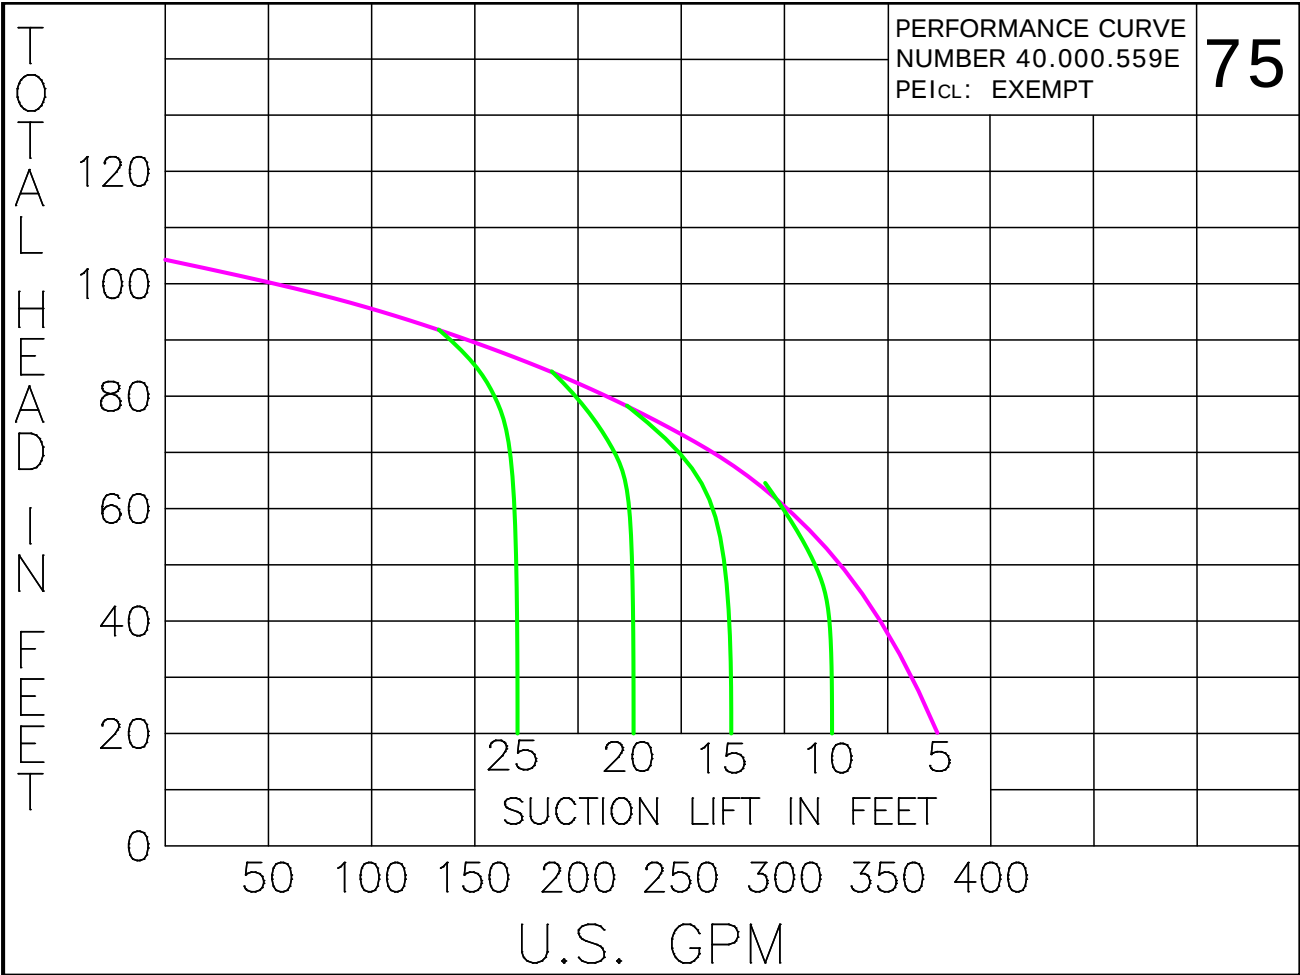


D075FPJM140
075JM140 07573500

FP 75
JM140

075JM140
81.001.297 M19

FP 75 • Iron • 1 1/8" Shaft • JM140

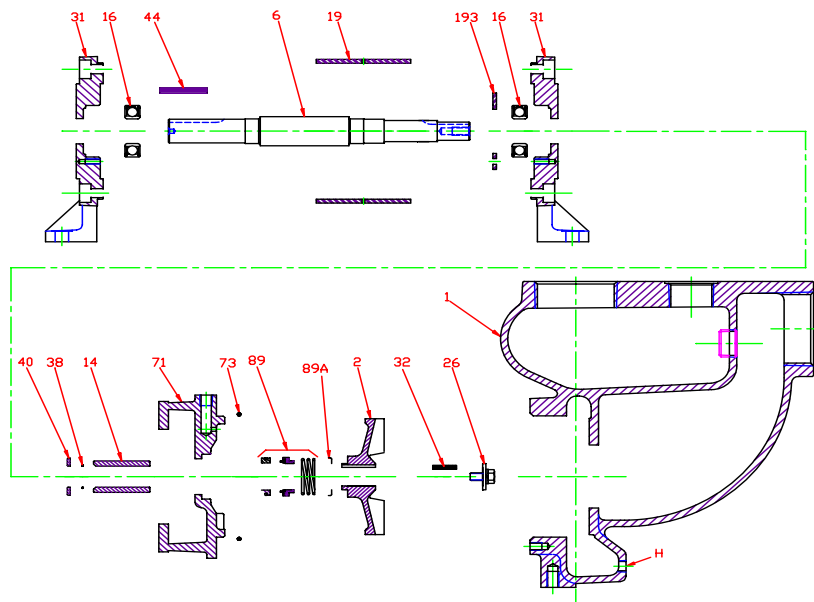

KEY NO.	PART NAME	PUMP 75
1	CASE, IRON, 3 x 3 NPT	130.000.295X
2	IMPELLER, 7/8" KEYED, ENCLOSED, 5.50" DIAMETER: IRON	131.000.304
14*	SHAFT SLEEVE, STAINLESS	110.000.192
26*	IMPELLER RETAINER, STAINLESS	118.000.597
38*	O-RING, SHAFT BUNA VITON	116.000.117 116.000.105
40*	FLINGER	104.000.165
71	ADAPTER, IRON	132.000.194X1
73*	GASKET, CASE	116.000.146
89*	1 1/2" SEALS: TYPE 21, BN-CARB/CM TYPE 21, VN-CARB/CM	101.000.168 101.000.191
89A*	SEAL RETAINER	104.000.202
	BEARING FRAME ASS'Y CONSISTING OF:	JM140 118.000.213X
6+	SHAFT, ASS'Y	135.000.180X
16	BEARING (2 REQ'D)	103.000.146
19	SHELL	110.000.231
31	END BRACKET (2 REQ'D)	132.000.232
32*+	KEY	102.000.102
44+	KEY	102.000.194
193	RETAINER	110.000.244
H	LOCKNUT	105.000.460
--	REPAIR KITS:	
	BN-CARB/CM SEAL	118.000.527A
	VN-CARB/CM SEAL	118.000.527

* DENOTES COMPONENTS INCLUDED IN REPAIR KIT.
THE REPAIR KITS INLCUDE THE BRONZE SHAFT SLEEVE EXCEPT THE VN-CARB/CM,
WHICH IS STAINLESS WITH VITON SHAFT O-RING.
+ DENOTES COMPONENTS INCLUDED WITH SHAFT ASSEMBLY

E075FPJM140

L15

P075JM140