



MARINE PRODUCT DATA SHEET OEM: 357-011-01 (500 GPH) AFTERMARKET: 357-011-11 (500 GPH)

For a complete package combined the Piranha Series Bilge pumps with our reliable automatic float switch. Our tough, high density nylon housing and heavy duty water cooled motor gives the SHURflo Bilge Pump unparalleled reliability. Adding our non-mercury, solid state controlled switch with 2 second time delay ensures easy removal of water from the bilge. Easy Installation and removable cartridge for easy cleaning.

TYPICAL APPLICATIONS

12V Marine Bilge Water Evacuation. For other applications, contact SHURflo.

PUMP

Туре:	Centrifugal Pump
Port:	3/4" Barb
Liquid:	130 °F [54 °C] Max
Prime:	Flooded Inlet
Run Dry:	No

ELECTRI CAL

Motor:	12VDC Permanent Magnet, Continuous Duty
Protection:	External Fuse
Pump Leads:	6 ft [1.8M] Tinned, 16 AWG
Switch Leads:	6 ft [1.8M] Tinned, 18 AWG
Fuse:	2.5 Amp Recommended
Control:	Solid State Control with two second time delay,
	engaging only when water is in the bilge.

MATERIALS

Housing:High Strength NylonImpeller:High Strength NylonHardware:Stainless Steel

APPROVALS

Ignition Protected, CE, ISO 8846

WARRANTY


3 Year Limited Warranty See SB-1050 For Full Warranty Details

SHIPPING


Net Weight (Boxed):	1.25 [Kg] each
Carton Weight:	30 Lb [13.6 Kg]
Pumps in Carton:	24
Carton Size:	24"L x 18"W x 11" H [61 cm x 46 cm x 28 cm]

RELATED DOCUMENTS

Catalog:	MS-030-140
Installation Manual:	911-593-00
Maintenance:	911-593-00
Applications Spec Guide:	MS-020-005
Warranty:	SB-1050





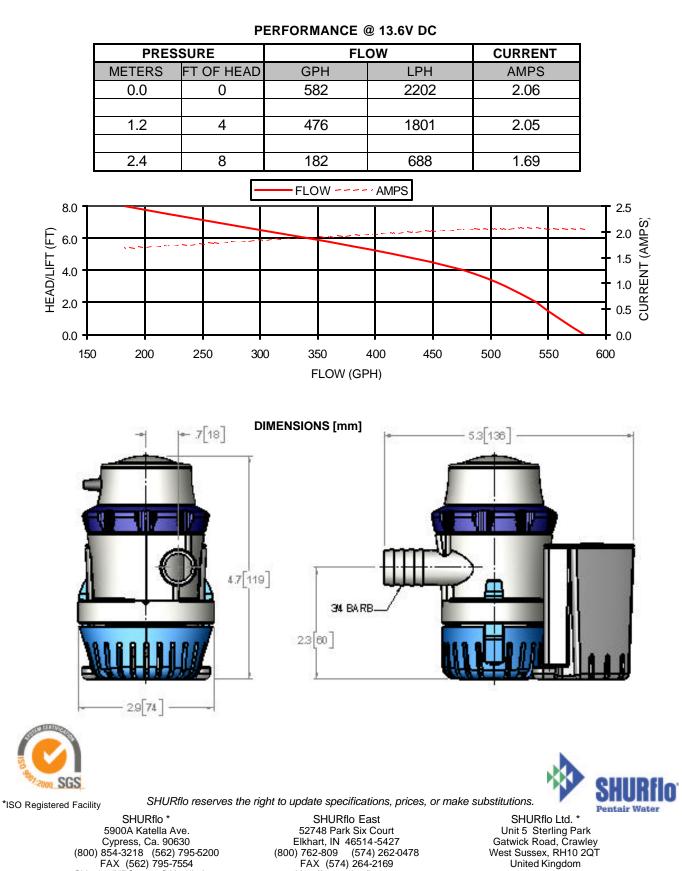

PDS 357-011-01

Shipping/UPS: 5900C Katella Ave.

Cypress, Ca. 90630

Rev. 11/06

Http://www.shurflo.com

+44 1293 424000

FAX +44 1293 421880