

MULTIPLE FUNCTIONS ALL-IN-ONE PUMP

The Econ FP is compact, easy to program and can respond to flow input from a variety of water conditioning equipment



Up to 30 gpd @ 80 psi

Wall Mountable

Adjustable from 10% to 100%

Effortless Tube Replacement



Water Meter

The pump will accept a pulse input from a dry contact water meter and has adjustable operating times of 0.1-1, 0.5-5, 1-10, 2-20 or 6-60 seconds per pulse.

Flow Switch

Accepting a signal from a dry contact flow switch, the pump will run at the selected speed when the switch is closed and stop when the switch opens.

24 VAC Input

STENNER PUMPS


The pump will run at the selected speed when it receives a 24 VAC signal from a water softener or other equipment.

ECON FP SOMETIMES GOOD THINGS COME IN SMALL PACKAGES

Econ FP is ideal for light duty water conditioning applications

- Patented quick release pump head design
- · Solid one piece tube construction
- UL & cUL listed
- · NSF 61 & 372 listed for USA & Canada
- 4 lbs
- 5.3" I x 3.6" w x 5.8" h






Mounting Kit EC303 For Stenner Tank or wall mount



Econ

Stand EC304 For horizontal display or wall mount

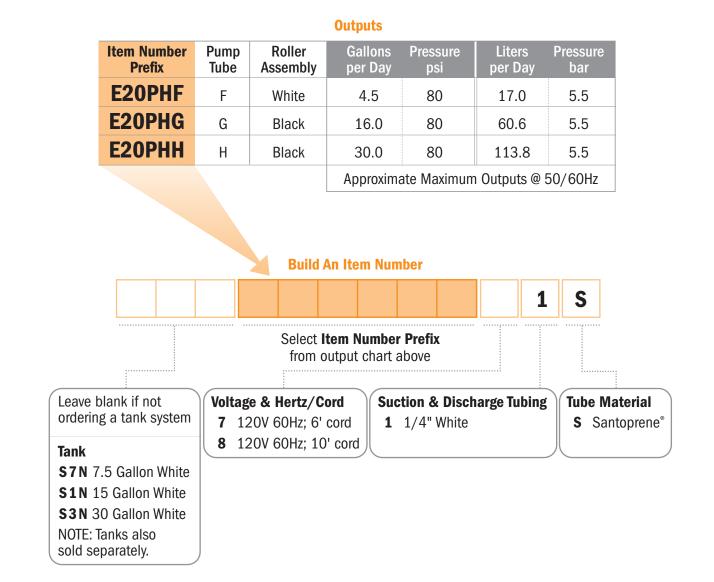

This information is not intended for specific application purposes. Stenner Pump Company reserves the right to make changes to prices, products, and specifications at any time without prior notice. FEFP 0812



