


Model 4103/4123



Iron Construction

Standard Clearance



12.7 mm Std. Port Size

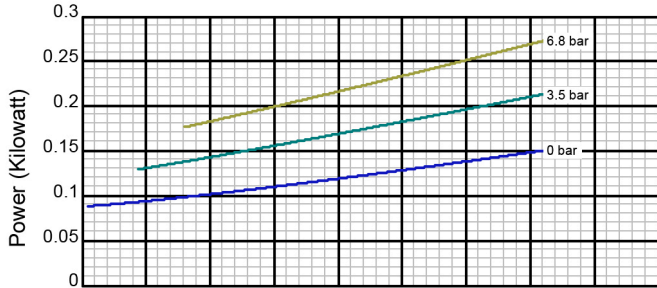



Viscosity: 1 cst

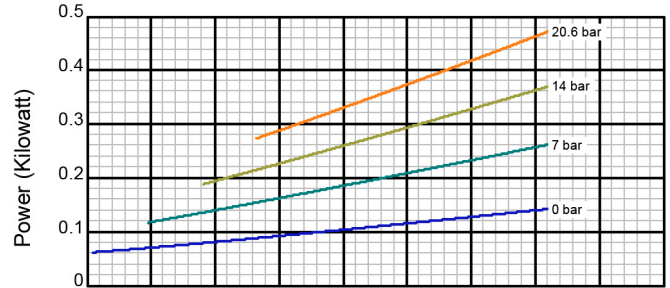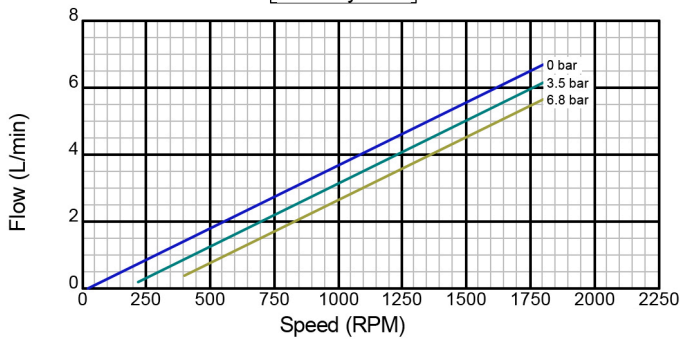


Viscosity: 21 cst

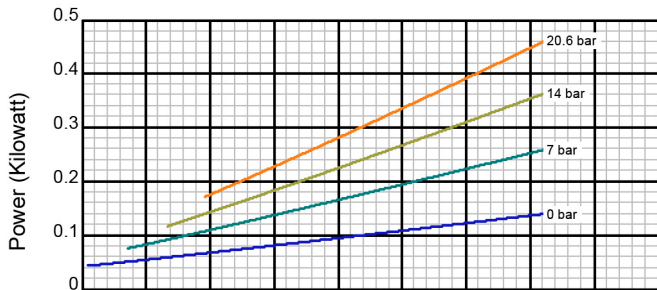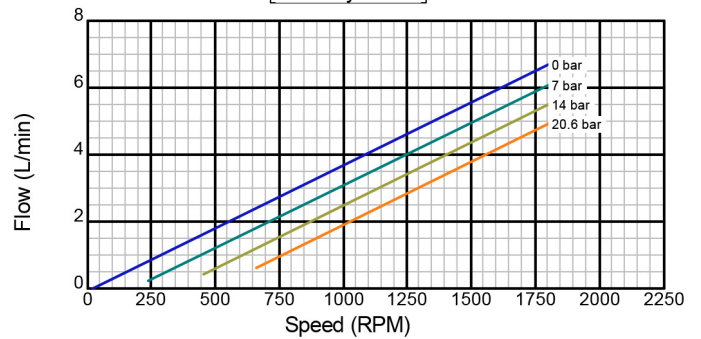

Viscosity: 50 cst

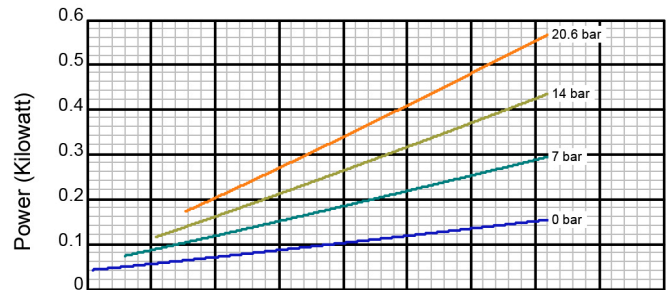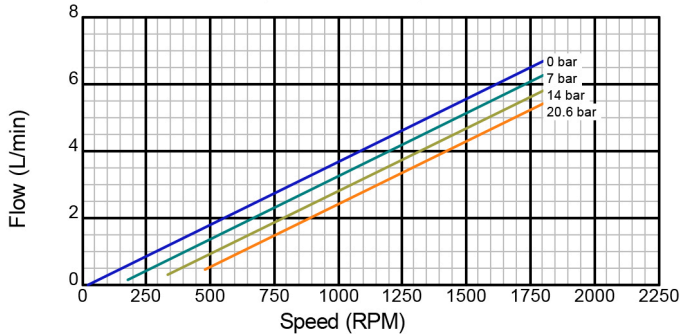

Viscosity: 100 cst

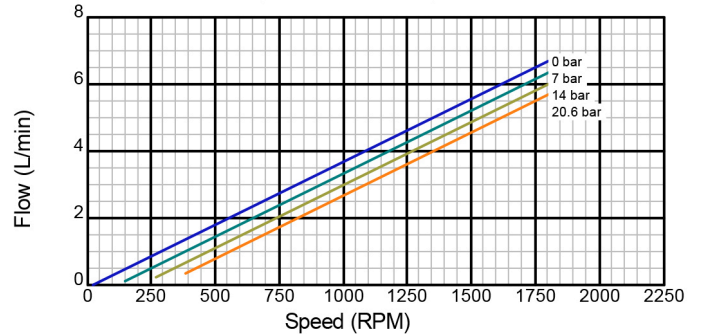


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.



Created On
November 30, 2000

Model 4103/4123



12.7 mm Std. Port Size

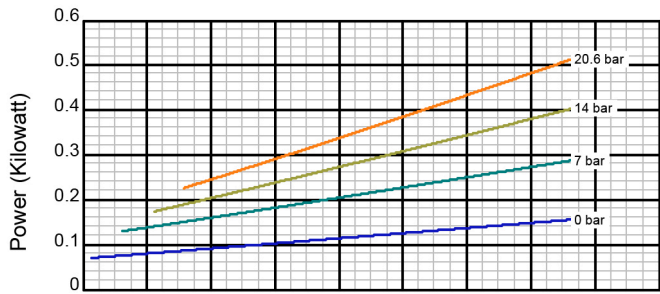


Viscosity: 200 cst

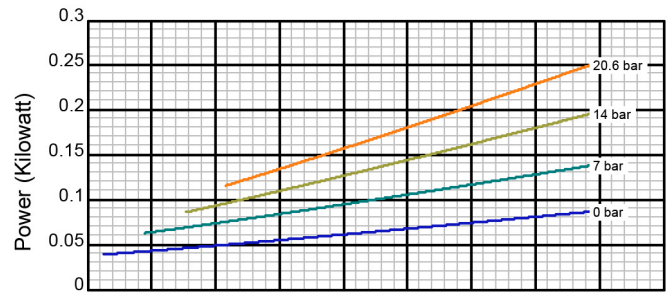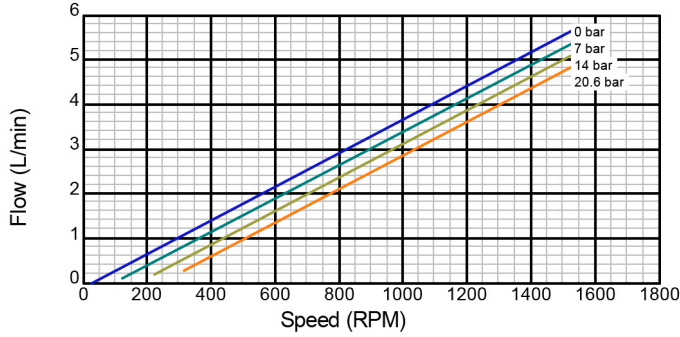

Viscosity: 1,000 cst

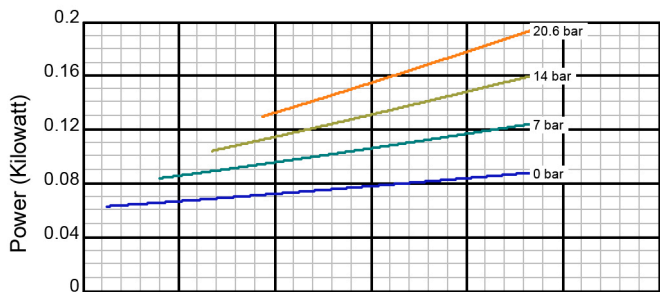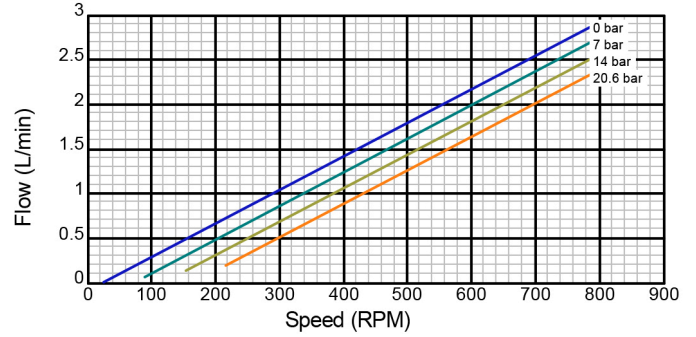

Viscosity: 2,000 cst

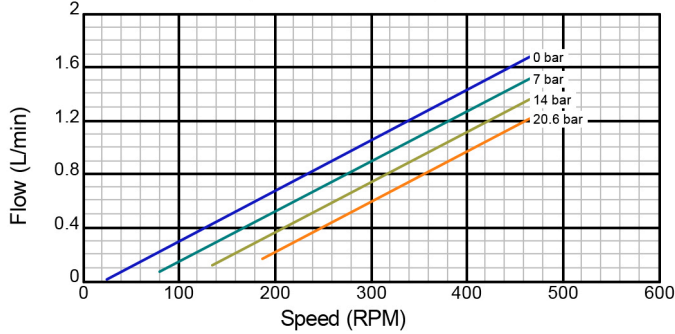


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.



Created On
November 30, 2000

Model 4104/4124



12.7 mm Std. Port Size

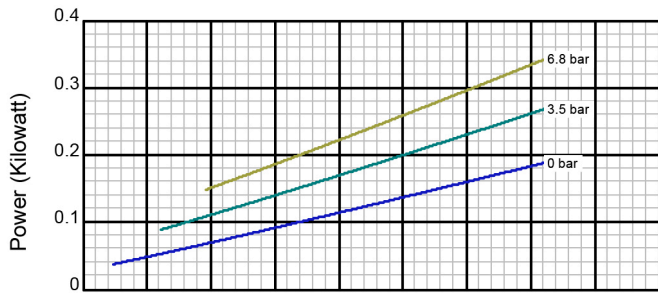



Viscosity: 1 cst

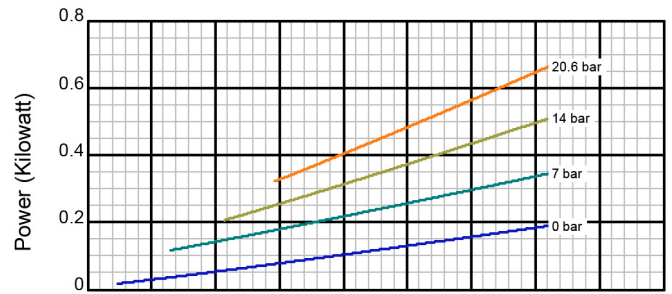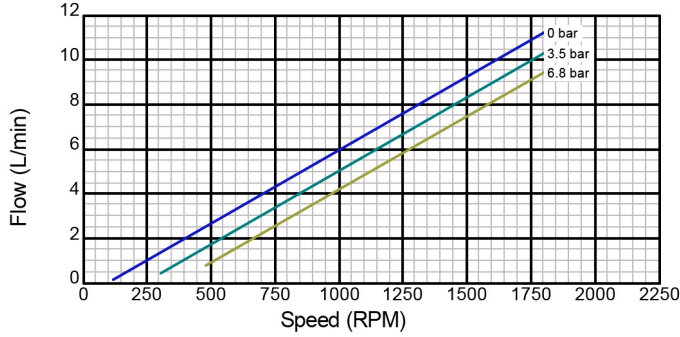


Viscosity: 21 cst

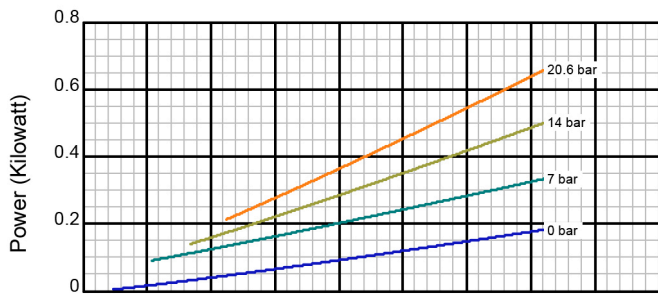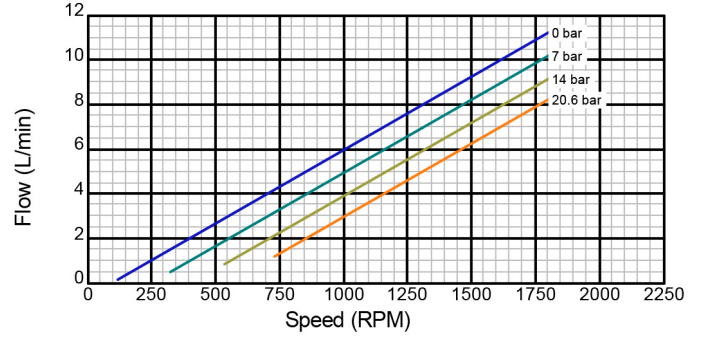

Viscosity: 50 cst

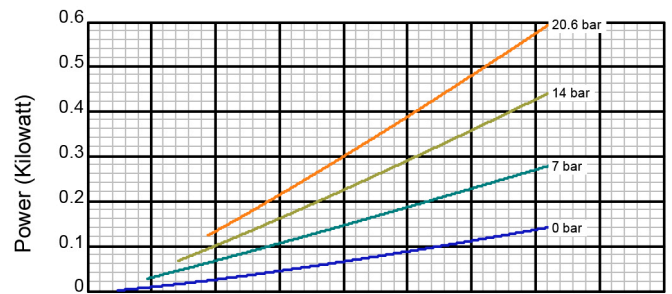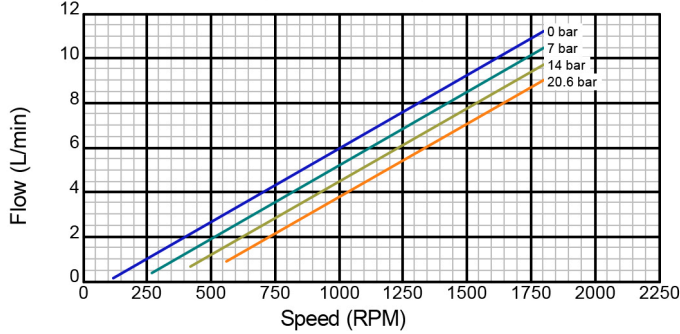

Viscosity: 100 cst



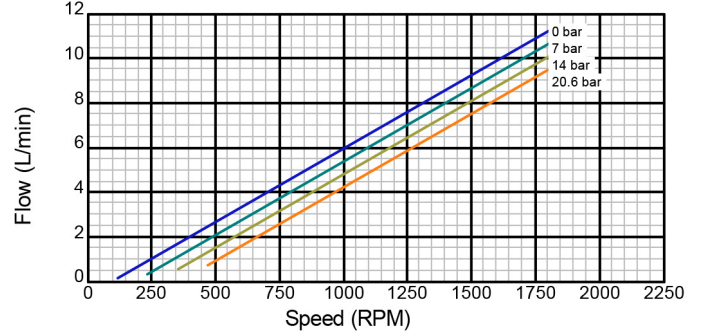


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created On
November 30, 2000

Model 4104/4124

12.7 mm Std. Port Size

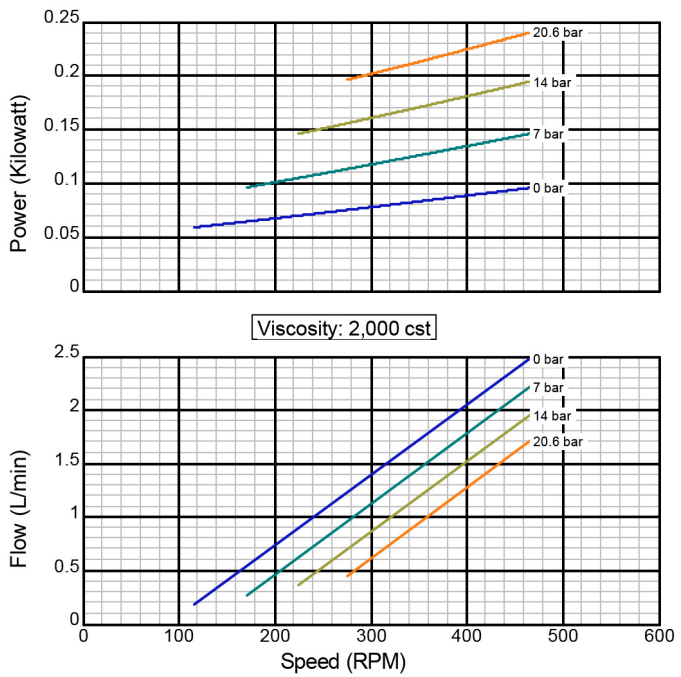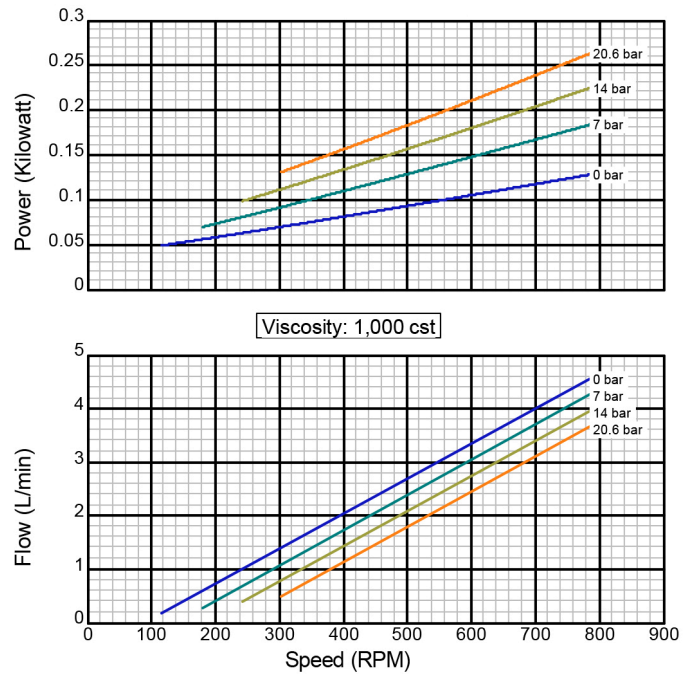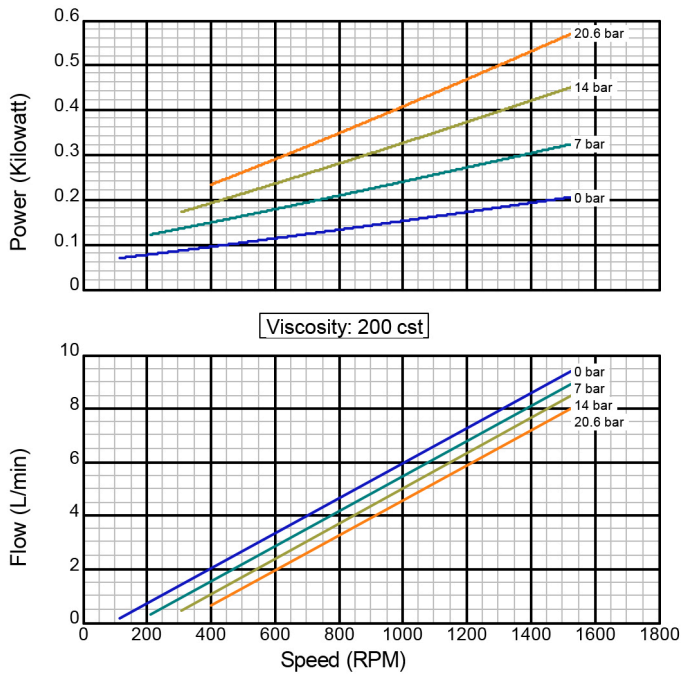


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.



Created On
November 30, 2000

Model 4105/4125



12.7 mm Std. Port Size

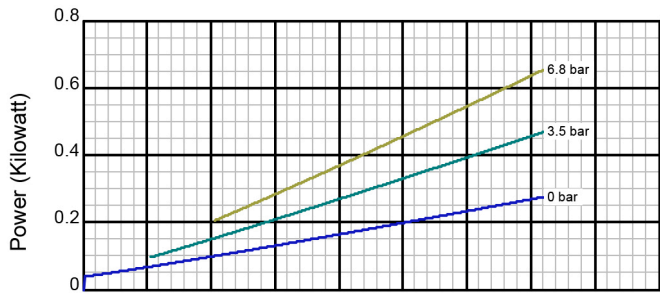



Viscosity: 1 cst

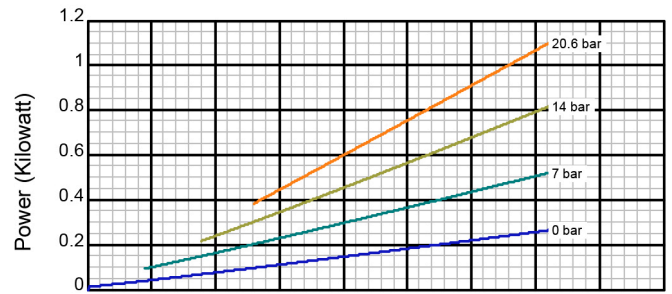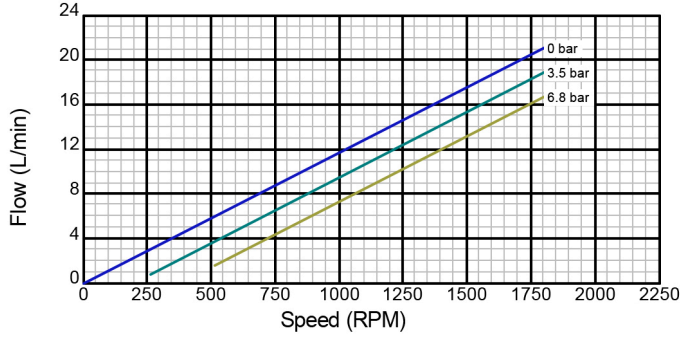


Viscosity: 21 cst

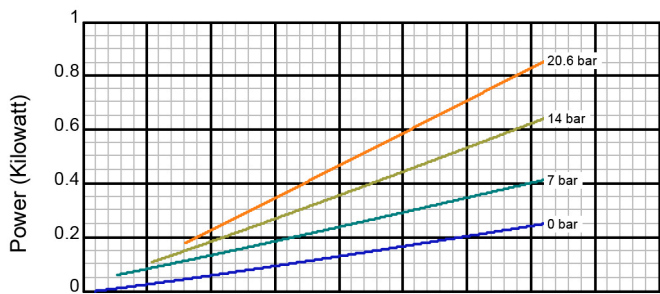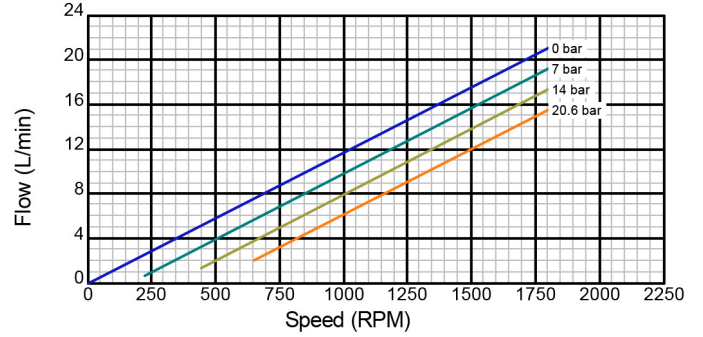

Viscosity: 50 cst

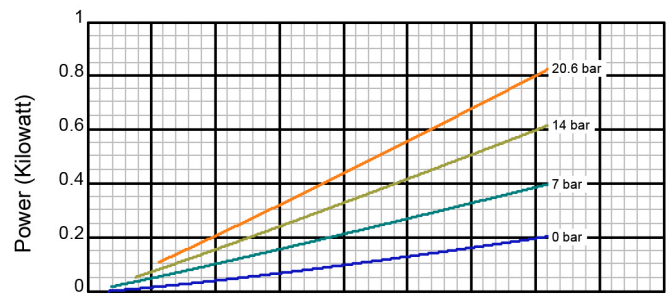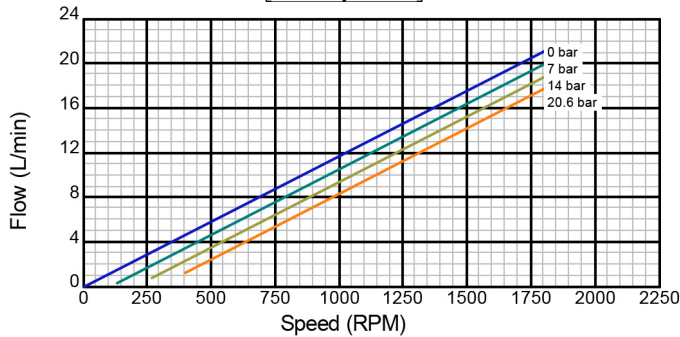

Viscosity: 100 cst



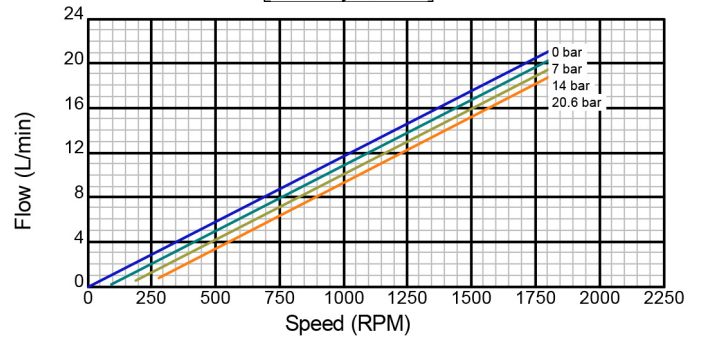


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created On
November 30, 2000

Model 4105/4125

12.7 mm Std. Port Size

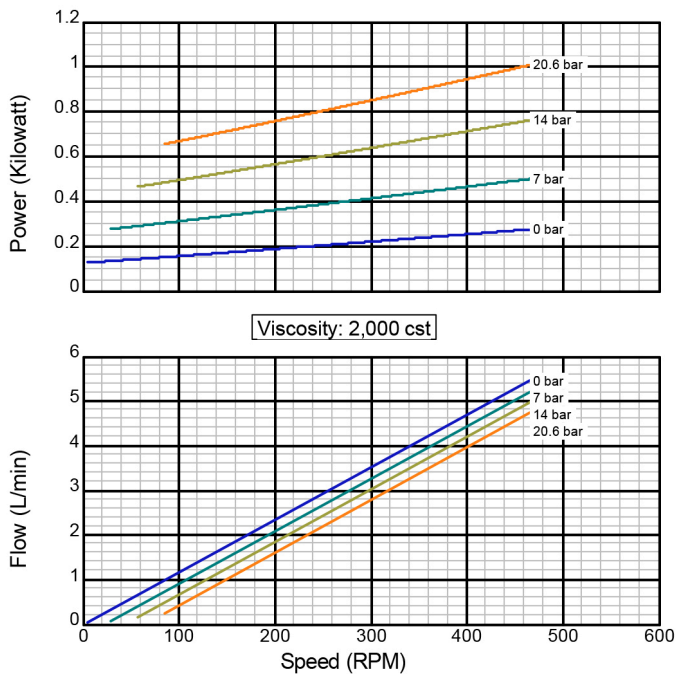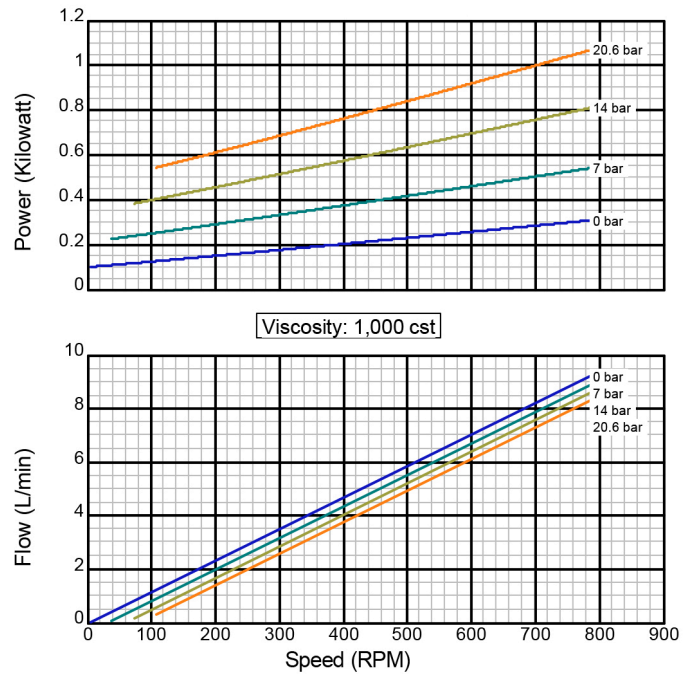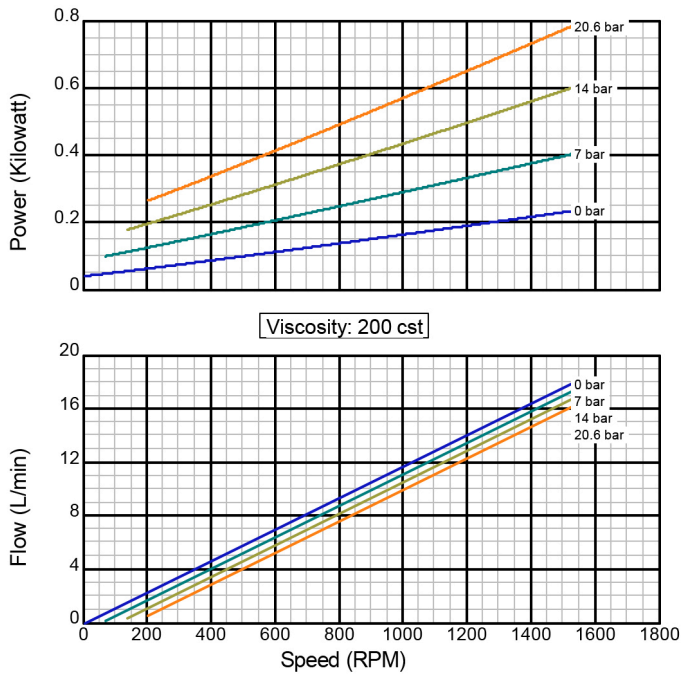


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.



Created On
November 30, 2000

Model 4108/4128



25.4 mm Std. Port Size

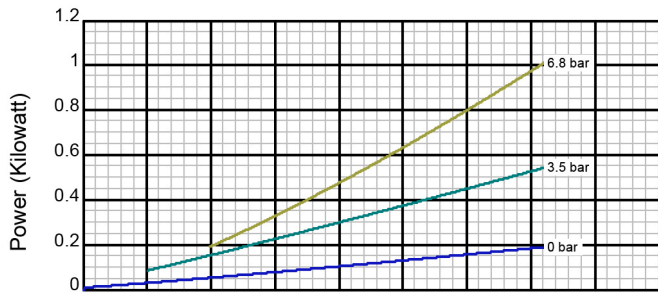



Viscosity: 1 cst

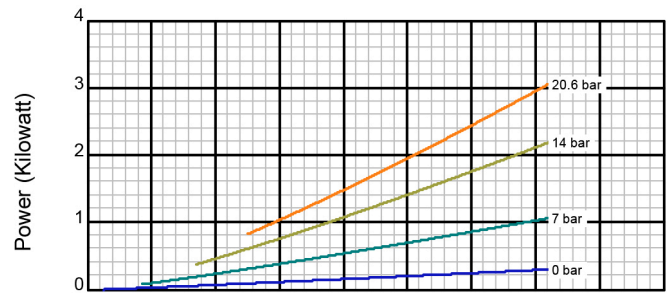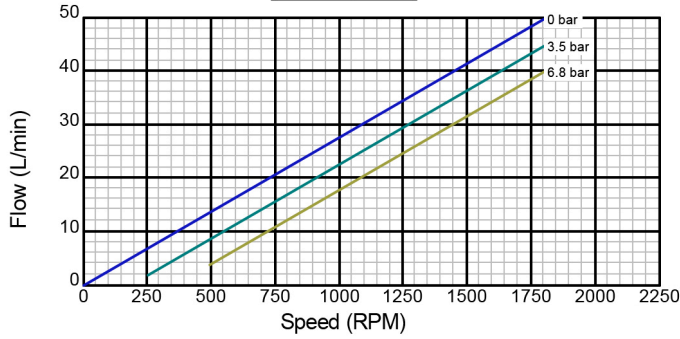


Viscosity: 21 cst

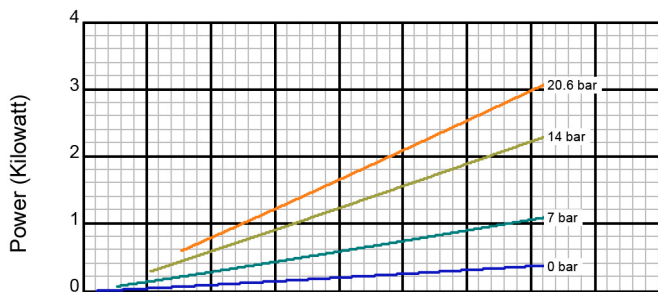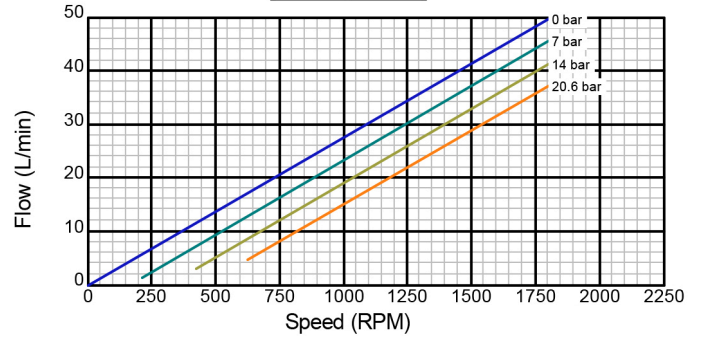

Viscosity: 50 cst

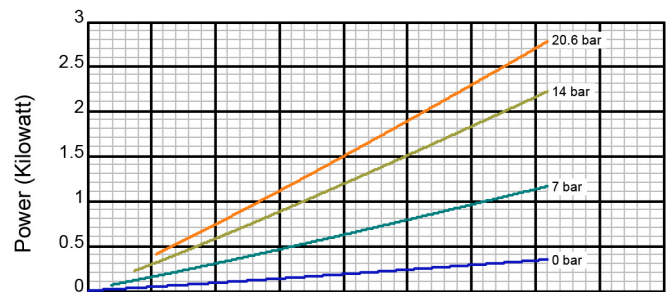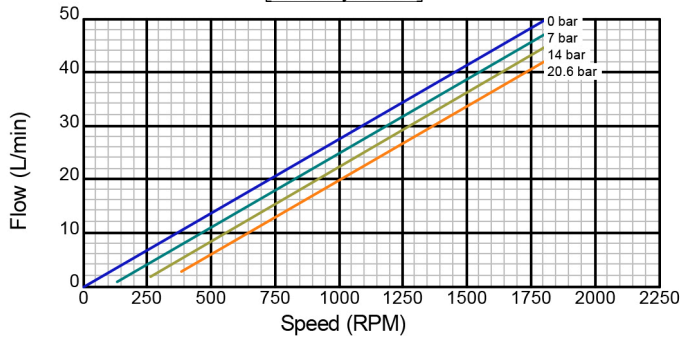

Viscosity: 100 cst

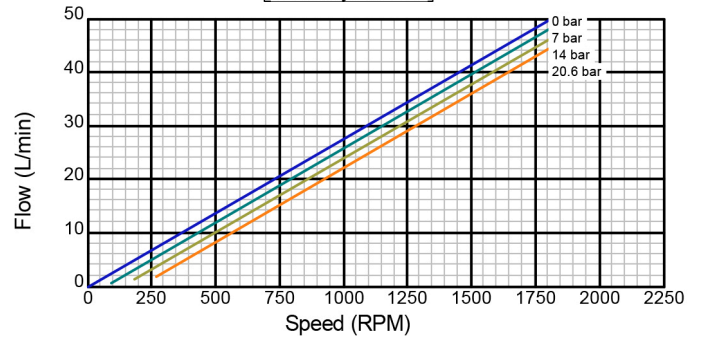

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created On
November 30, 2000

Model 4108/4128



Iron Construction

Standard Clearance



25.4 mm Std. Port Size

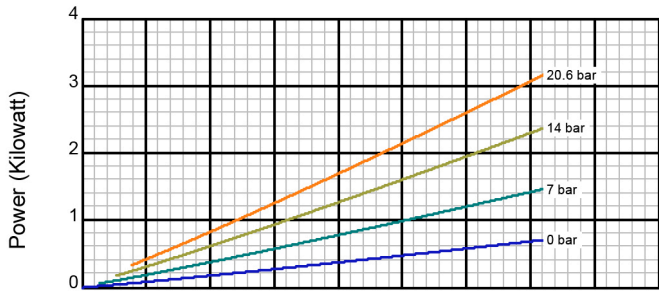


Viscosity: 200 cst

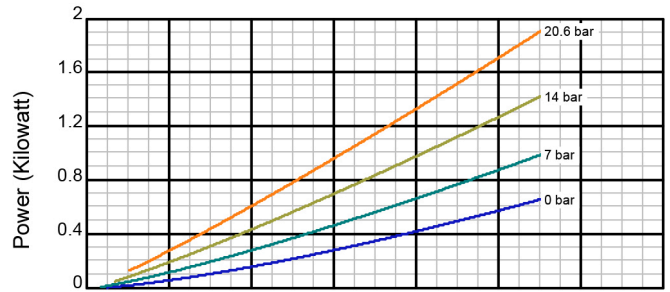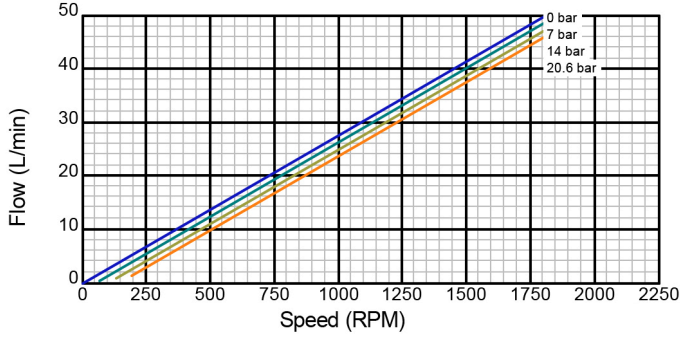

Viscosity: 1,000 cst

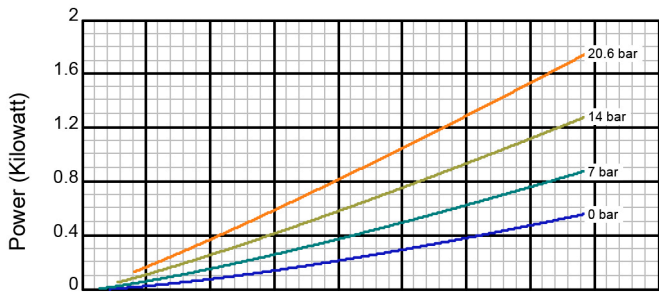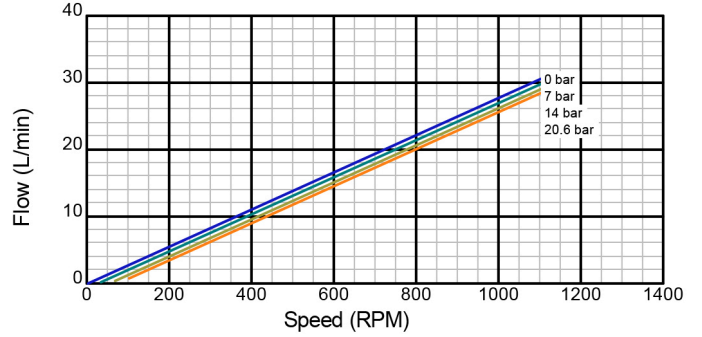

Viscosity: 2,000 cst

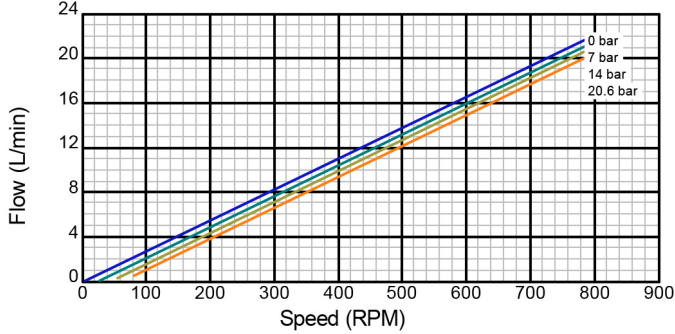

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on November 30, 2000