


Performance Curves (Metric)

4300 Series

Model 4302/4322

Iron Construction Standard Clearance

25.4 mm Std. Port Size

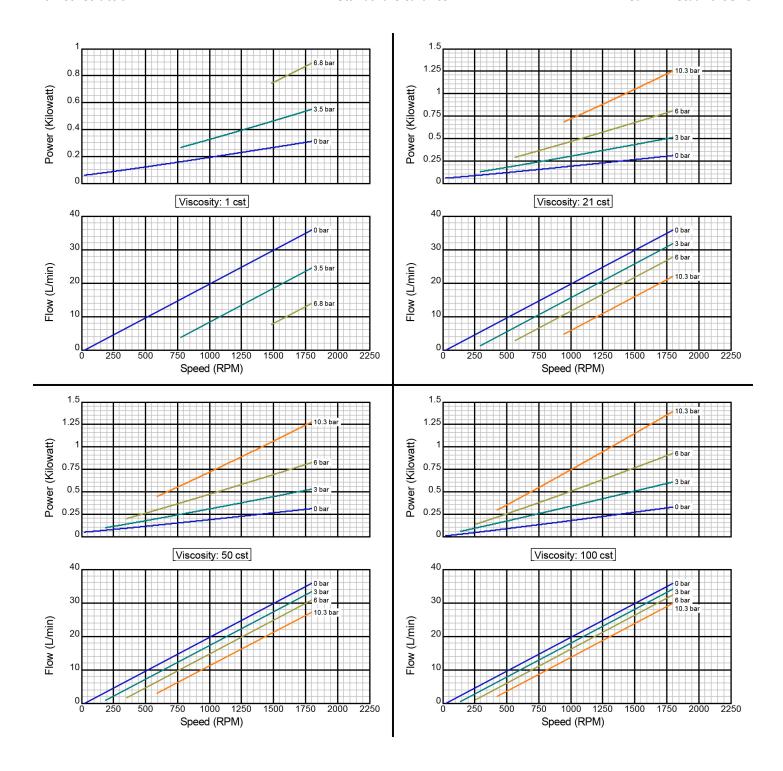



There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on November 30, 2000

Standard Clearance


25.4 mm Std. Port Size

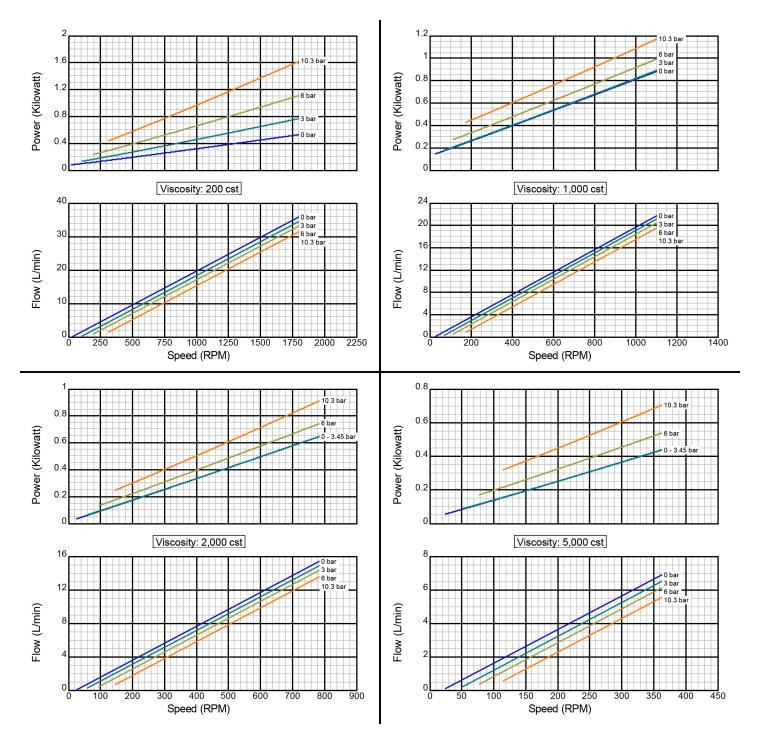


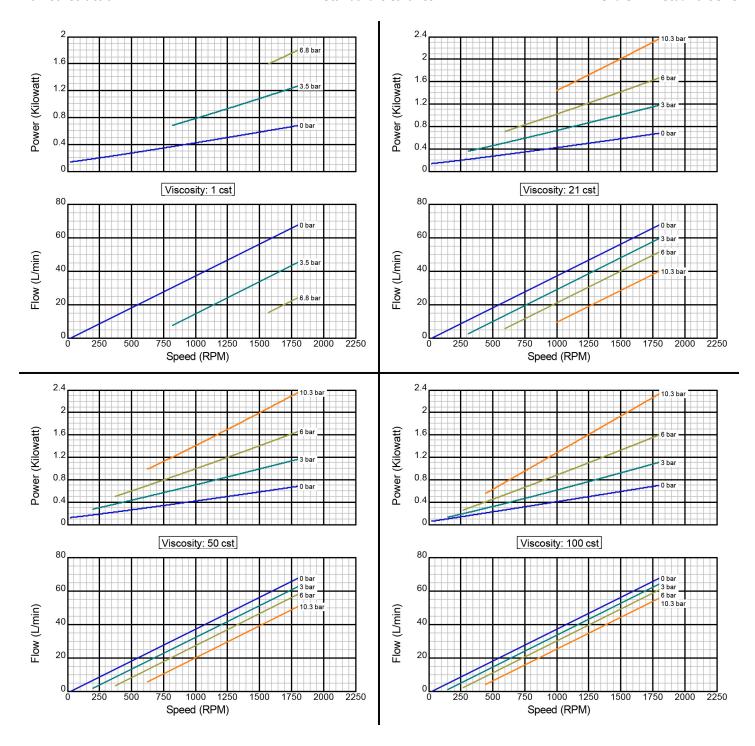



Standard Clearance

31.75 mm Std. Port Size

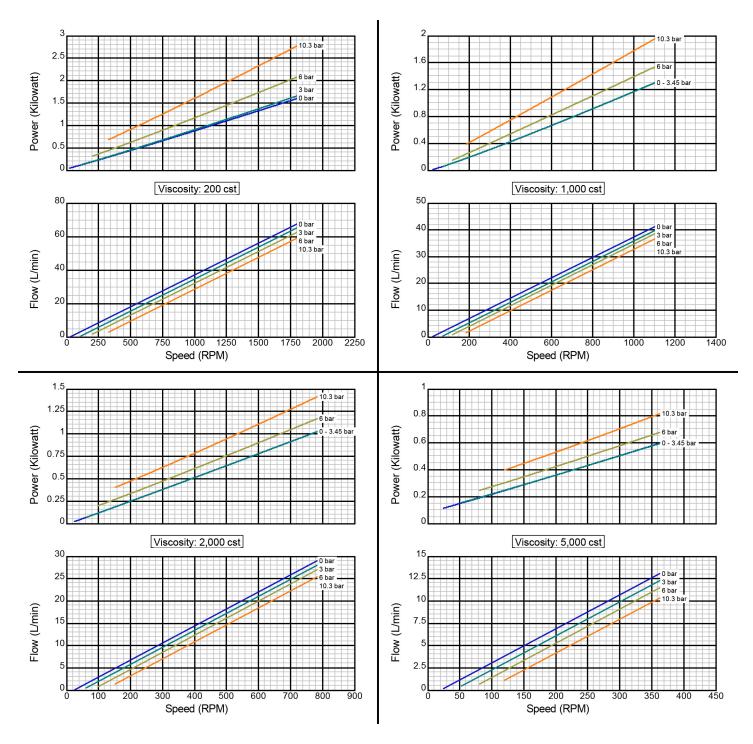


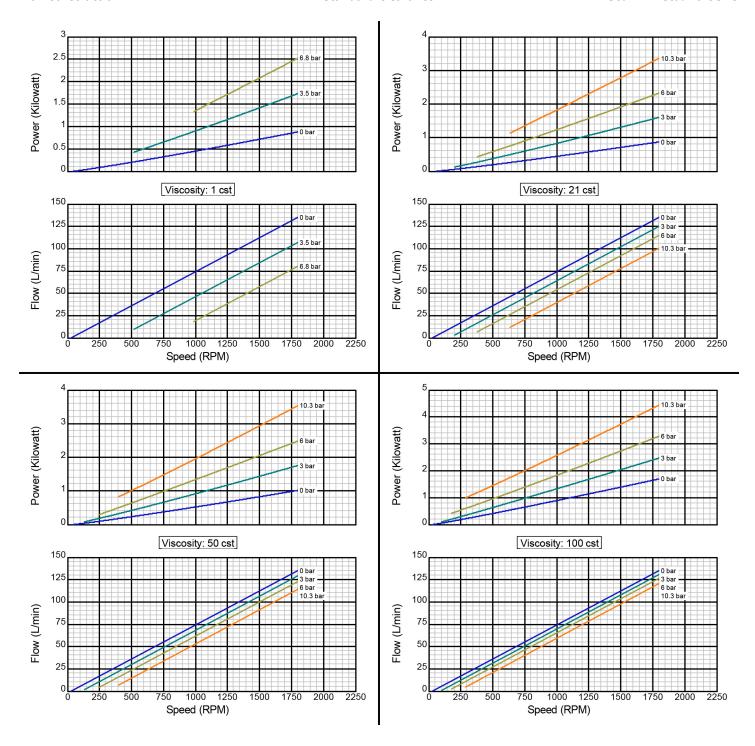

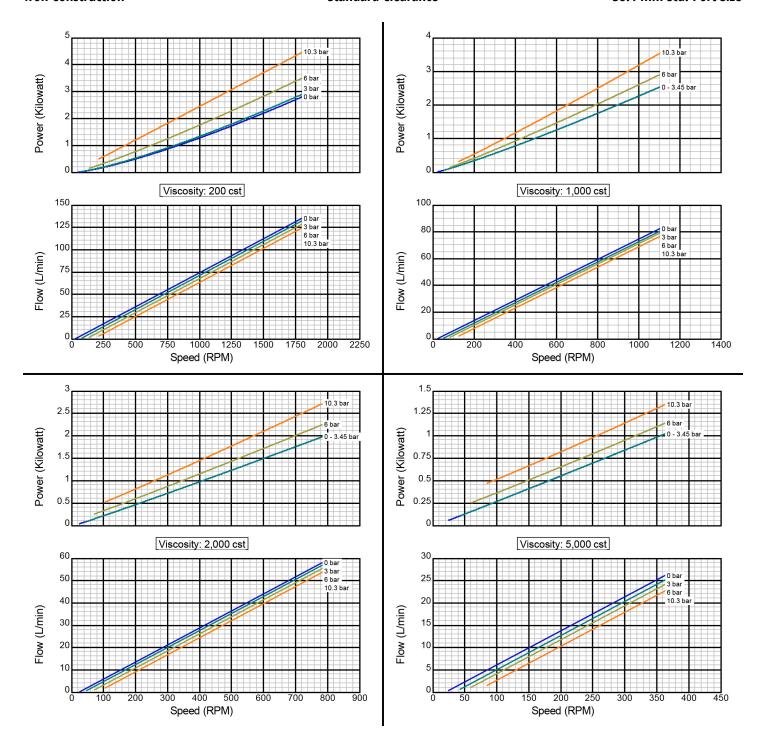

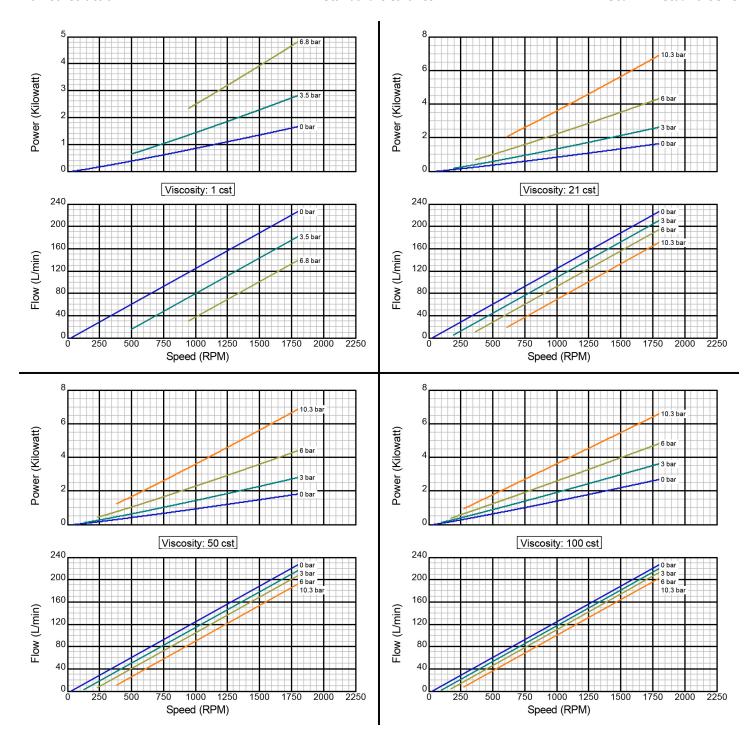


Standard Clearance

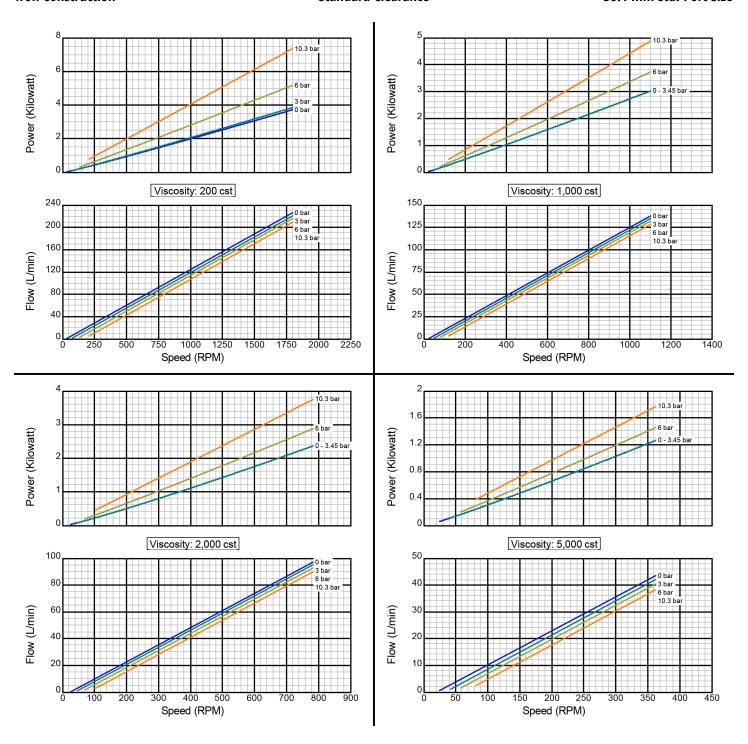


Standard Clearance

50.8 mm Std. Port Size

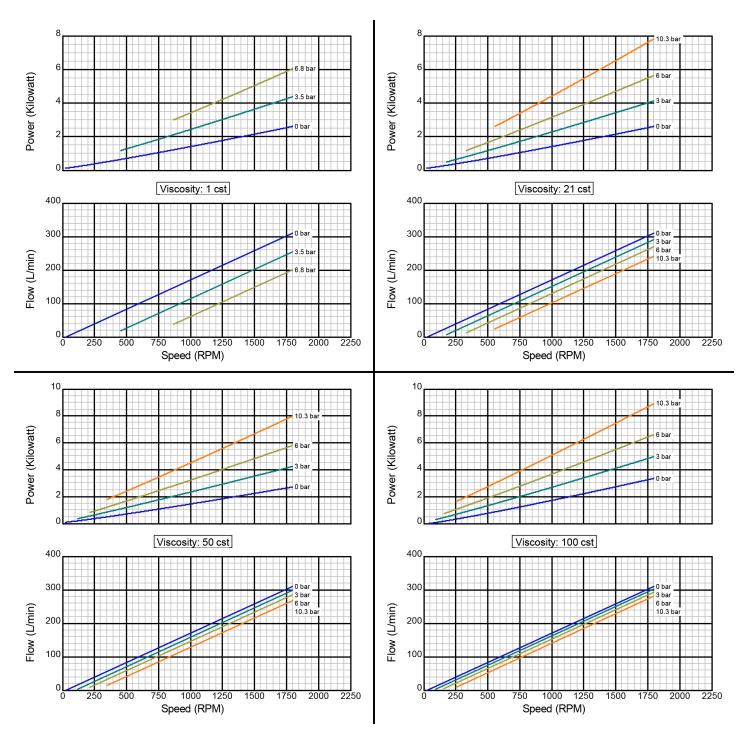

Standard Clearance

50.8 mm Std. Port Size

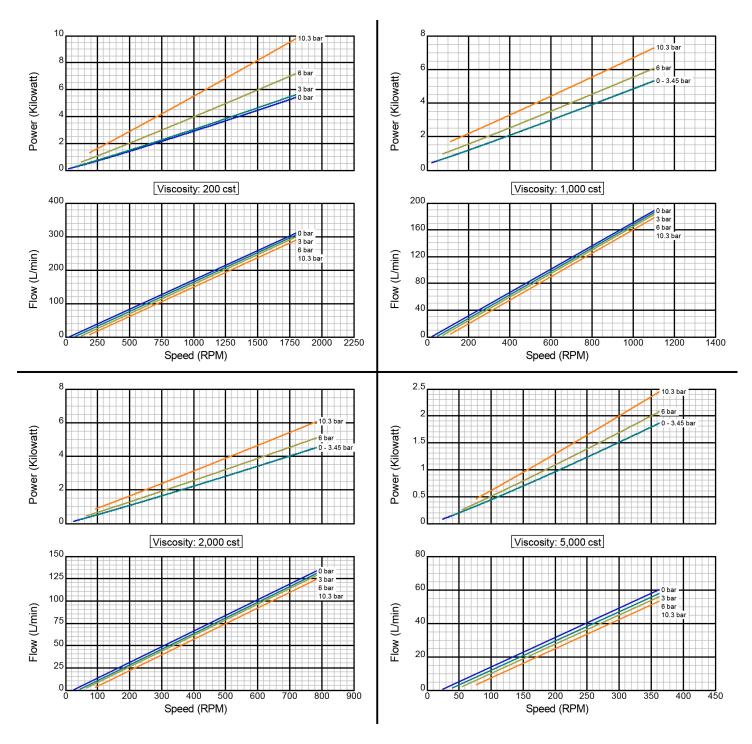

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on November 30, 2000