
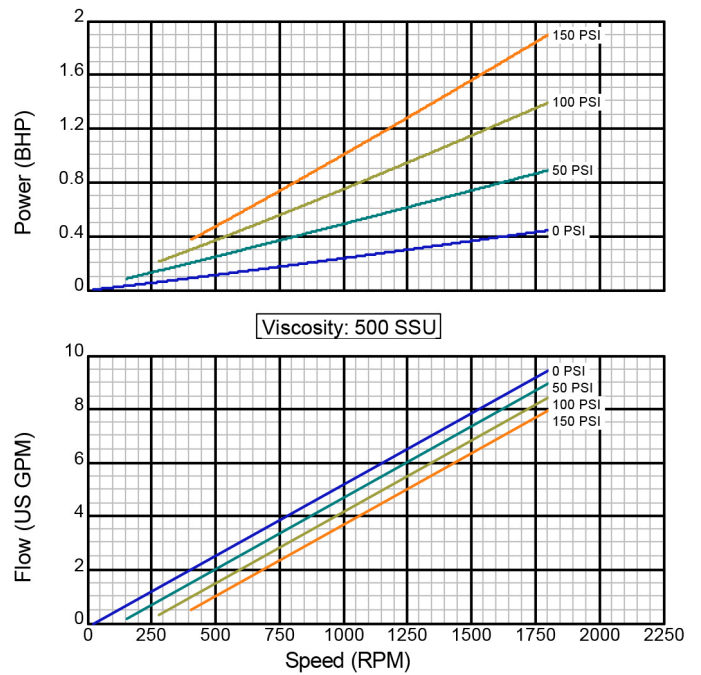
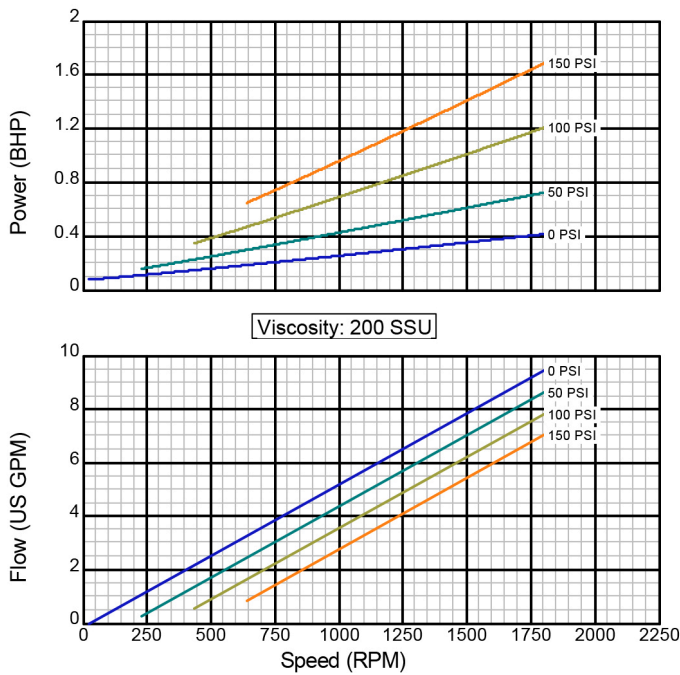
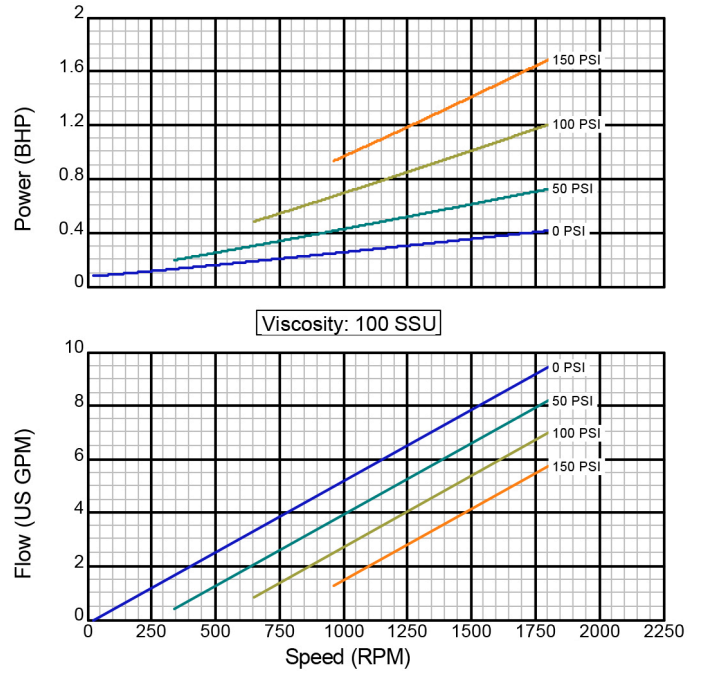


### Model 4302/4322

Iron Construction

Standard Clearance

1" Std. Port Size

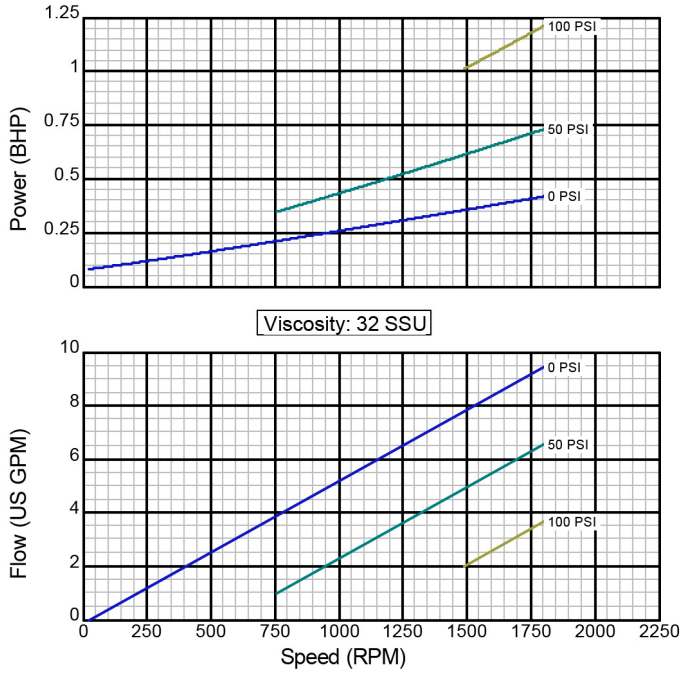

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 4302/4322



Iron Construction

Standard Clearance



1" Std. Port Size

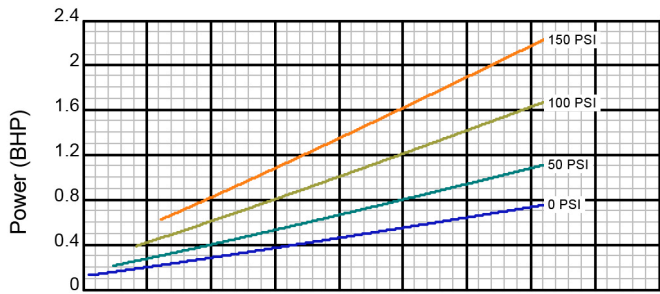



Viscosity: 1,000 SSU

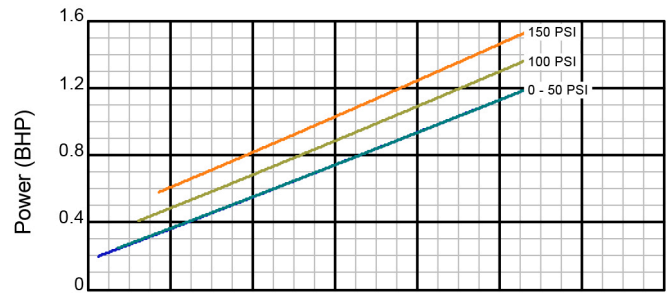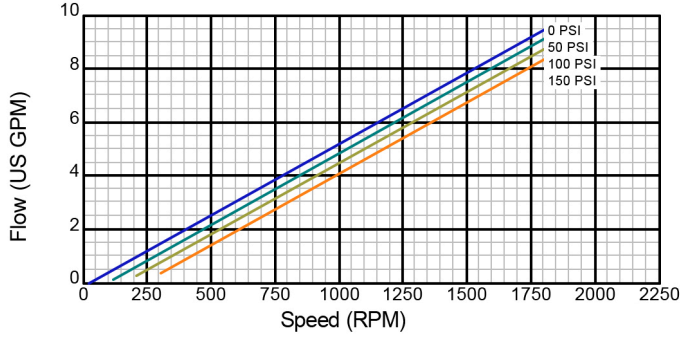


Viscosity: 5,000 SSU

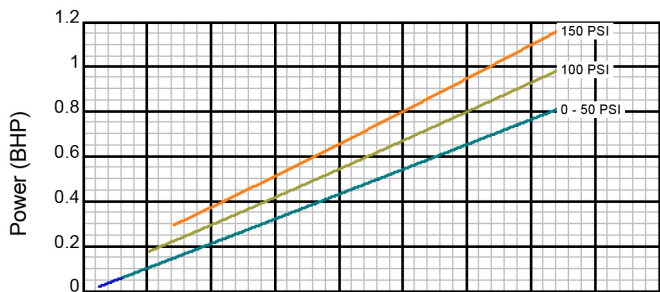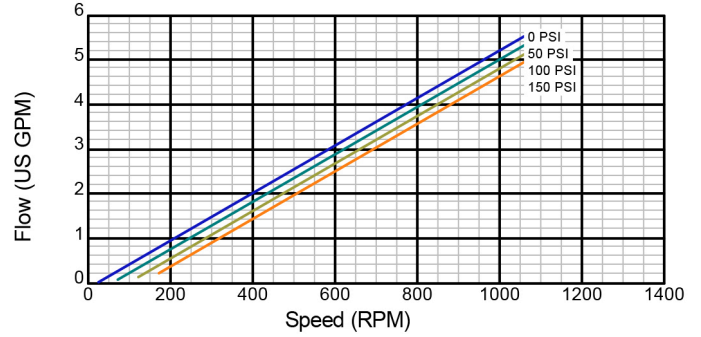

Viscosity: 10,000 SSU

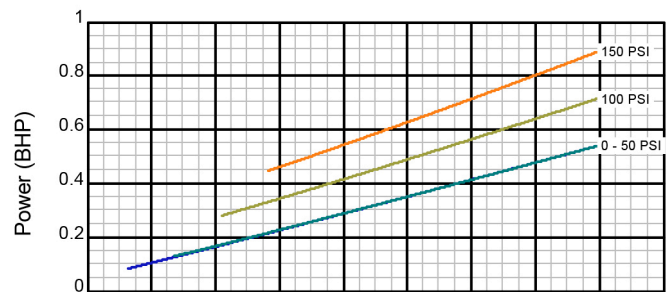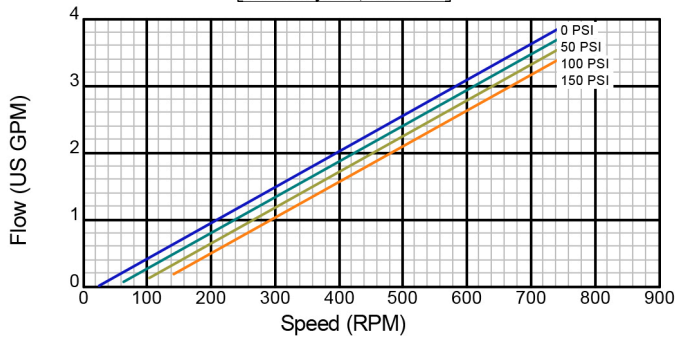

Viscosity: 25,000 SSU

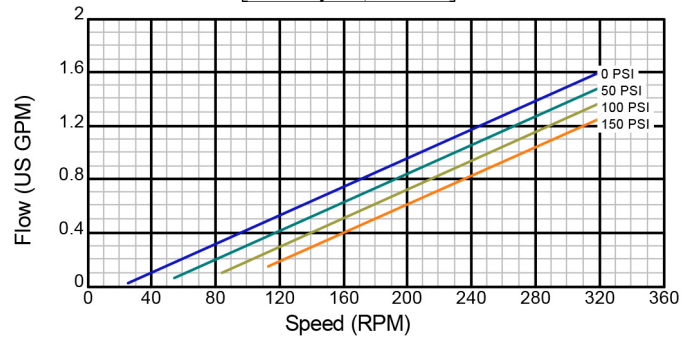

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 4302/4322



Iron Construction

Standard Clearance


1" Std. Port Size

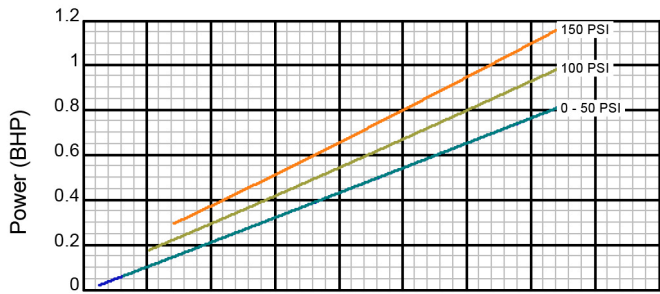

Viscosity: 10,000 SSU

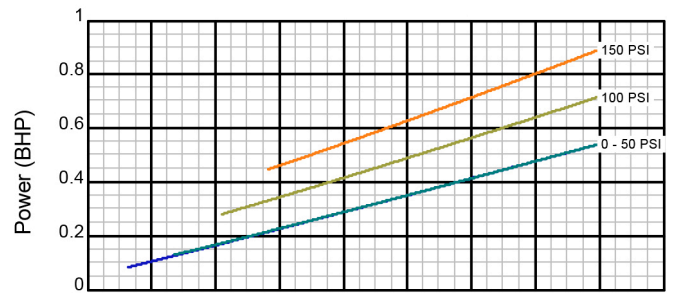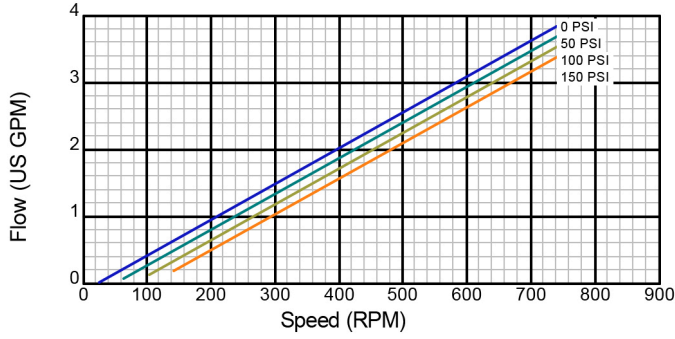

Viscosity: 25,000 SSU

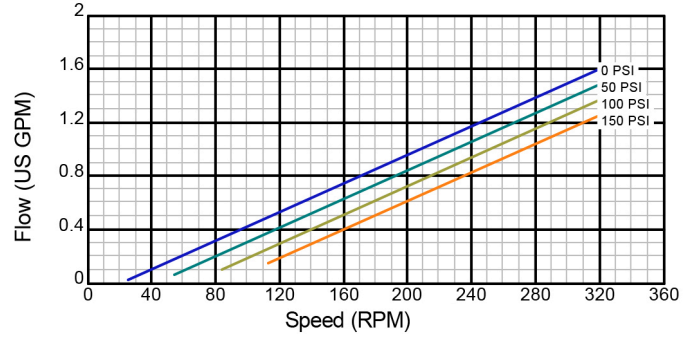

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.





Created on November 30, 2000

# Model 4303/4323

Iron Construction

Standard Clearance

1.25" Std. Port Size

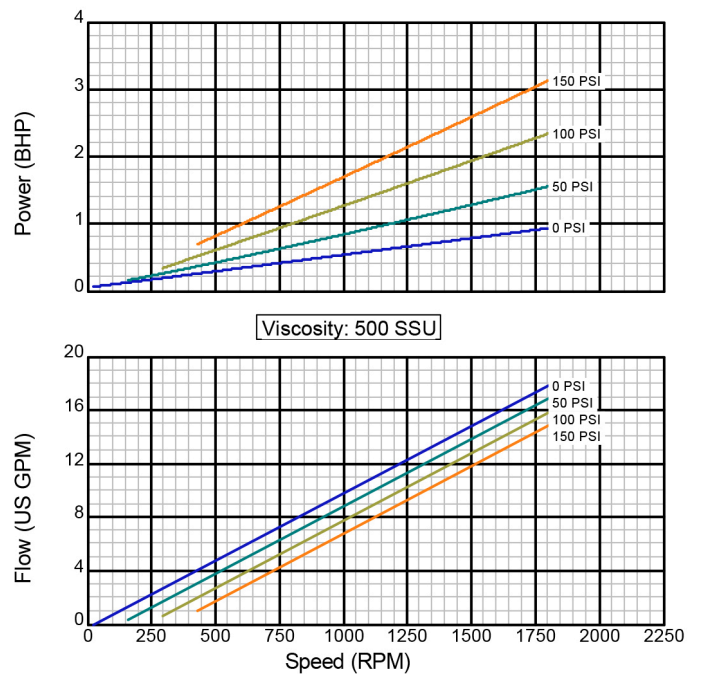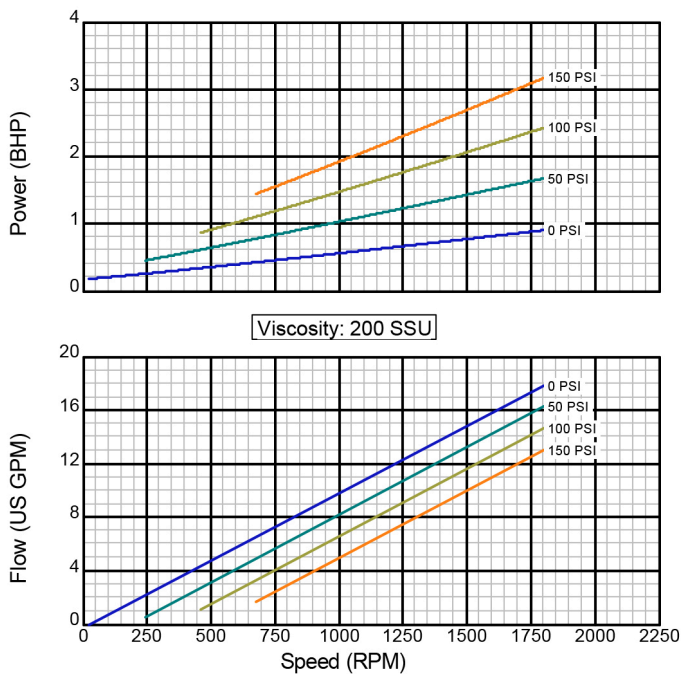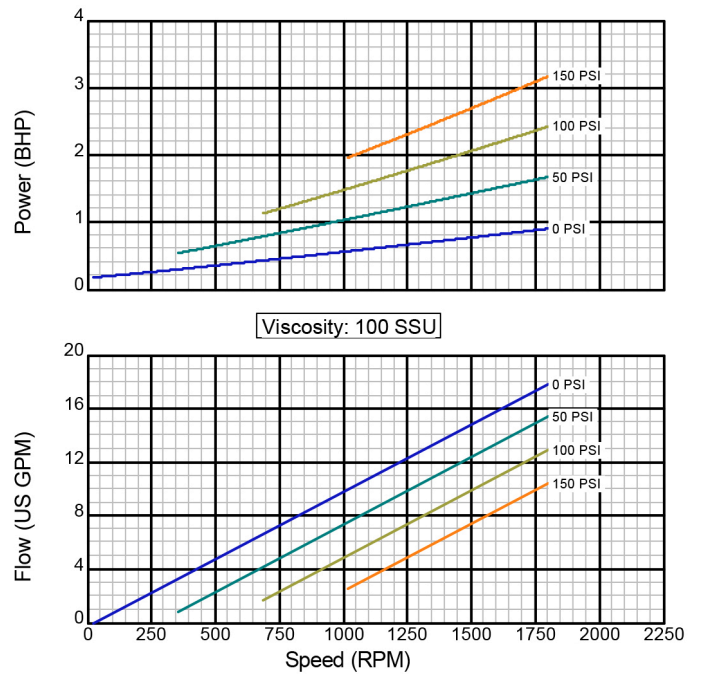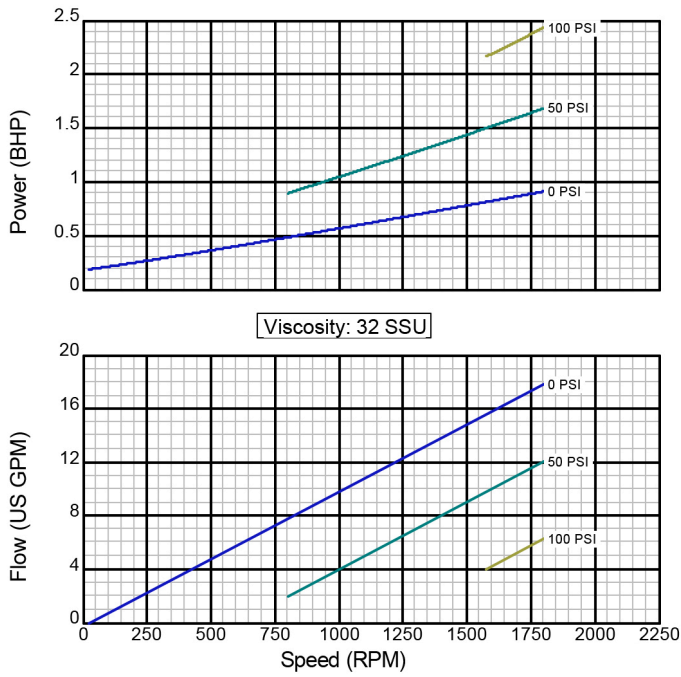

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 4303/4323



Iron Construction

Standard Clearance



1.25" Std. Port Size

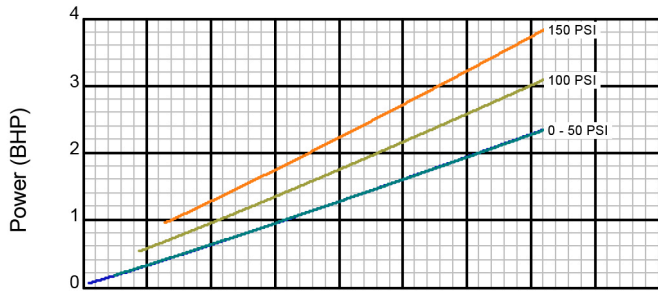



Viscosity: 1,000 SSU

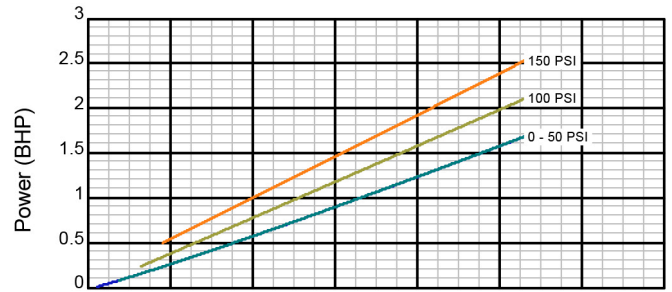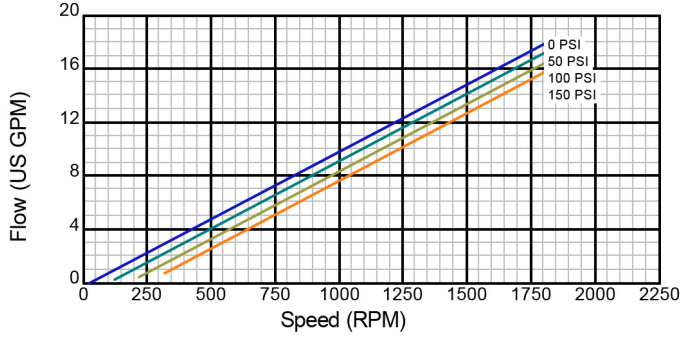


Viscosity: 5,000 SSU

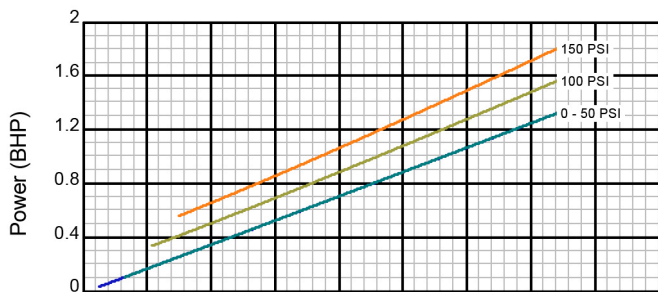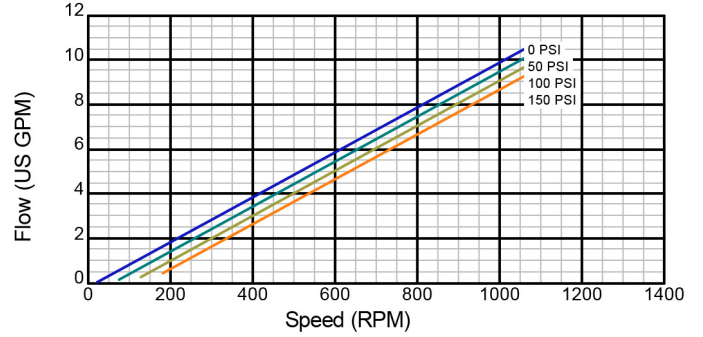

Viscosity: 10,000 SSU

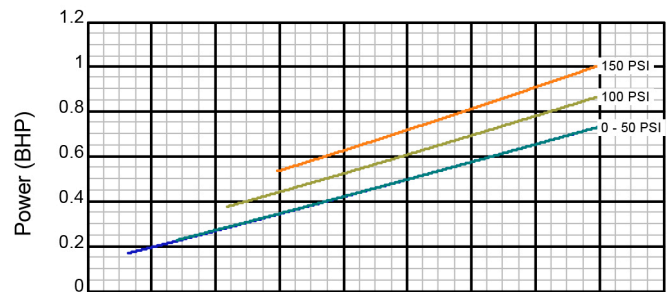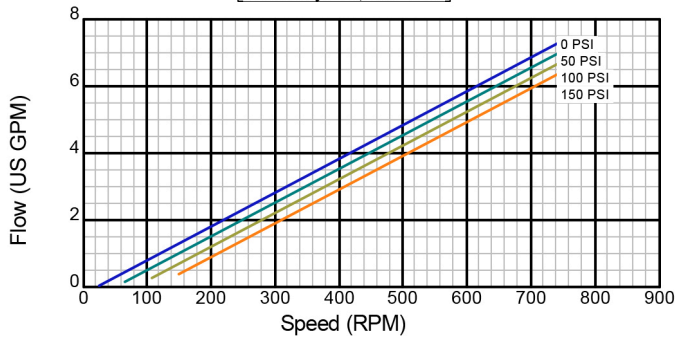

Viscosity: 25,000 SSU

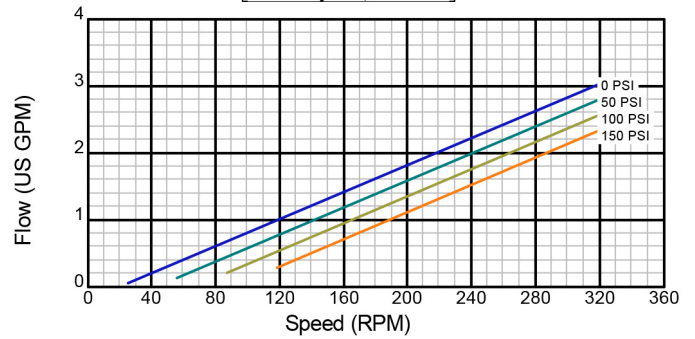

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 4303/4323



Iron Construction

Standard Clearance


1.25" Std Port Size

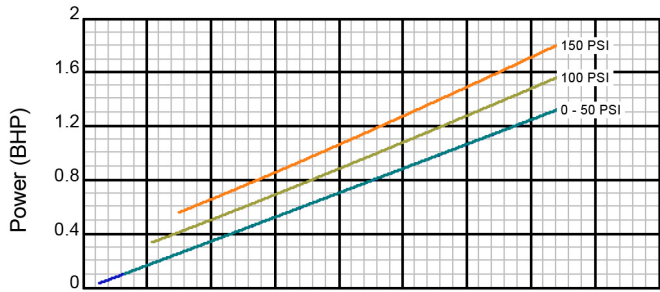

Viscosity: 10,000 SSU

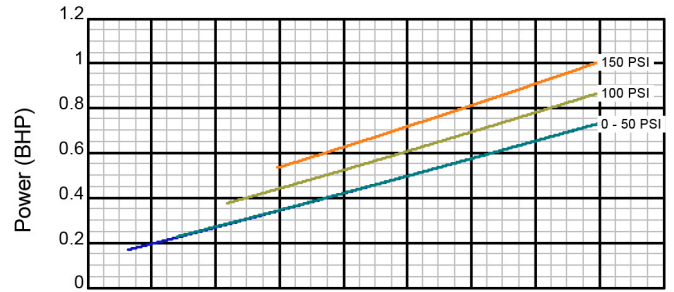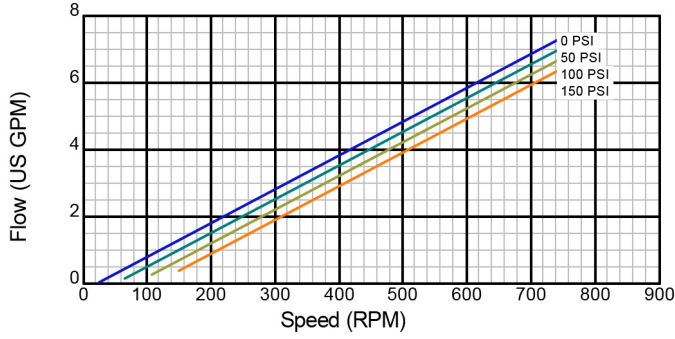

Viscosity: 25,000 SSU

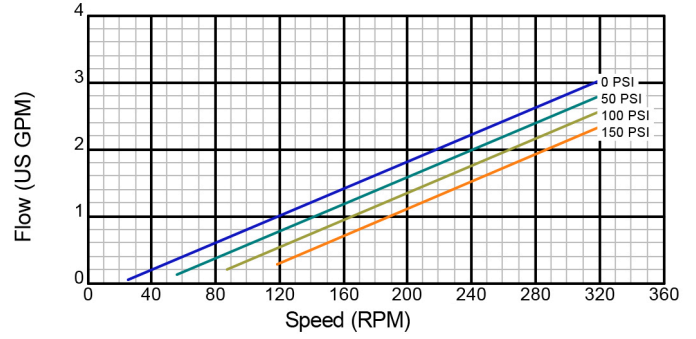

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 4304/4324



Iron Construction

Standard Clearance



1.5" Std. Port Size

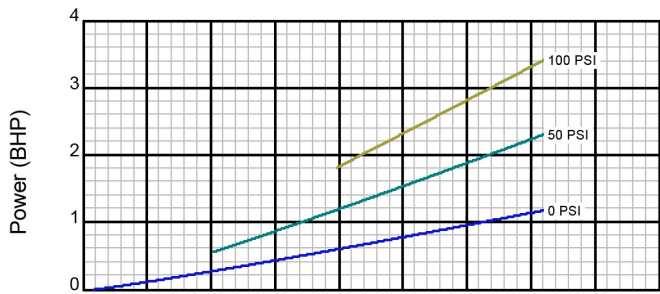



Viscosity: 32 SSU

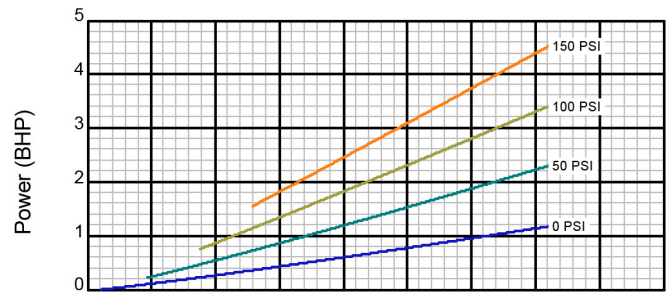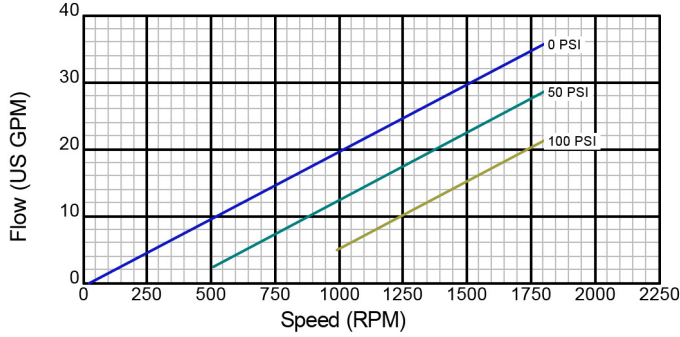


Viscosity: 100 SSU

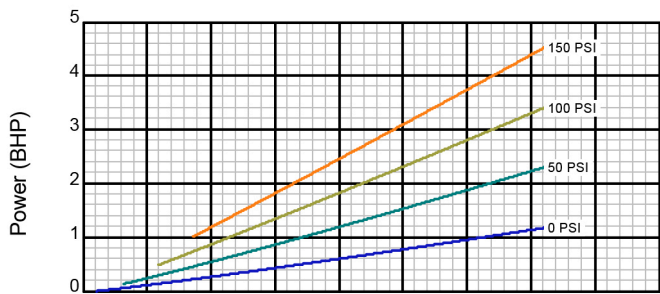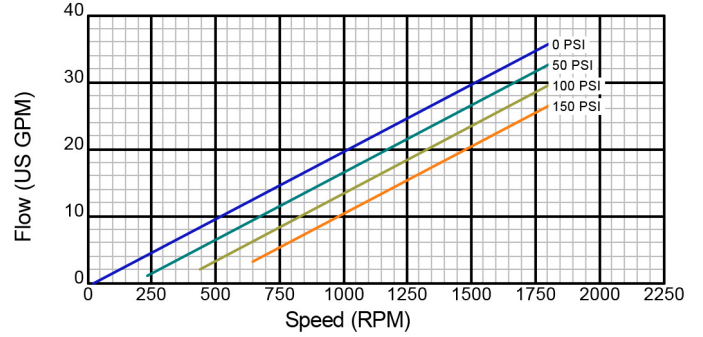

Viscosity: 200 SSU

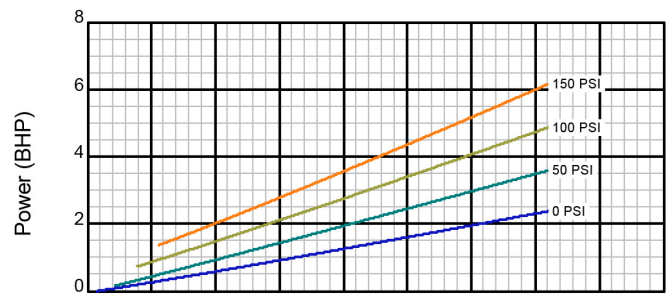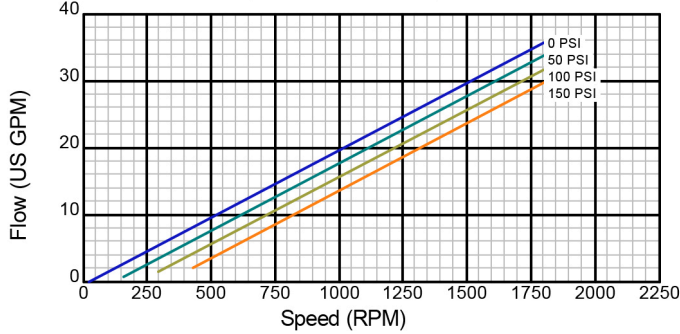

Viscosity: 500 SSU

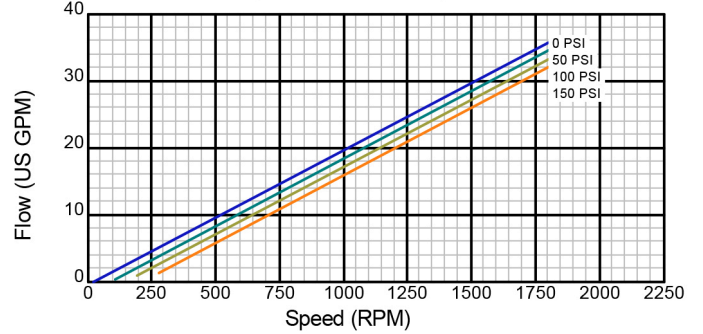

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 4304/4324



Iron Construction

Standard Clearance



1.5 Std. Port Size

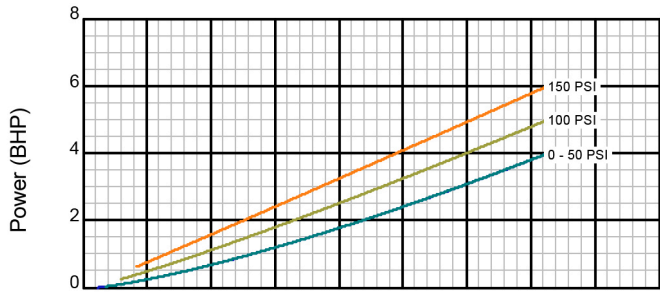



Viscosity: 1,000 SSU

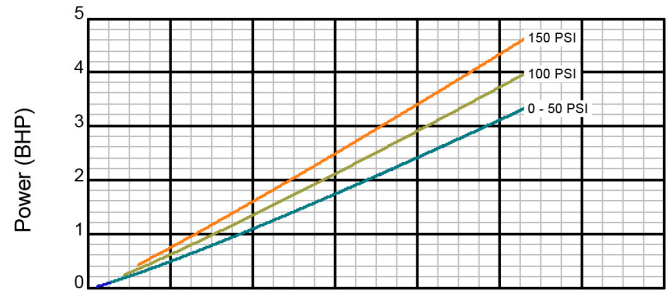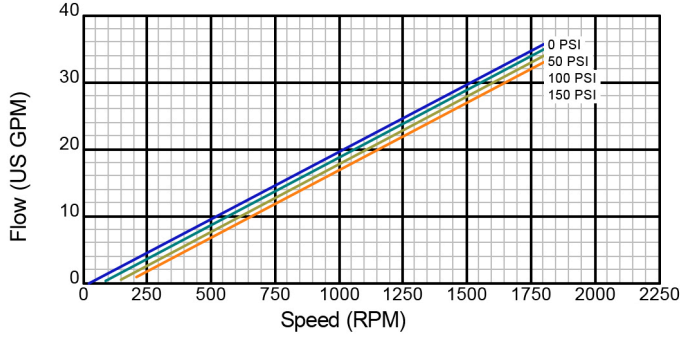


Viscosity: 5,000 SSU

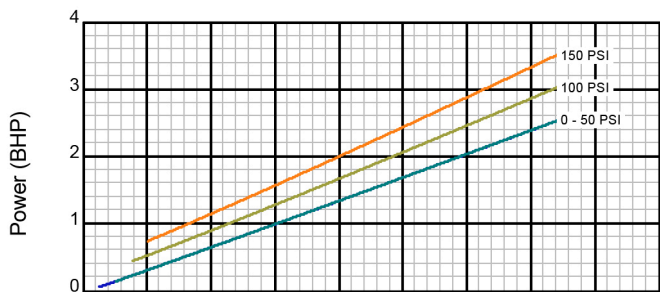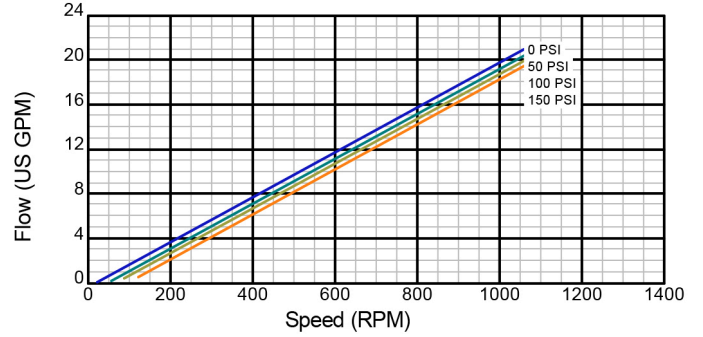

Viscosity: 10,000 SSU

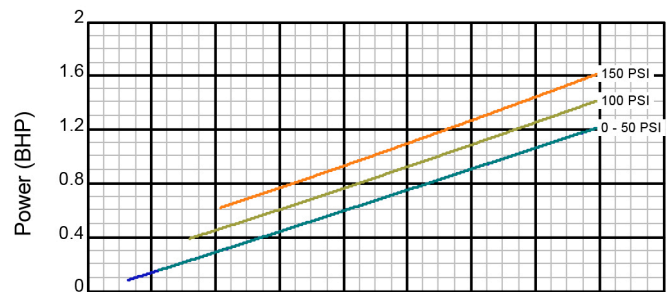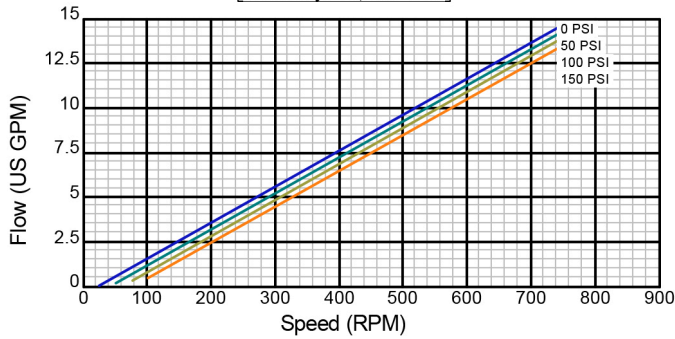

Viscosity: 25,000 SSU

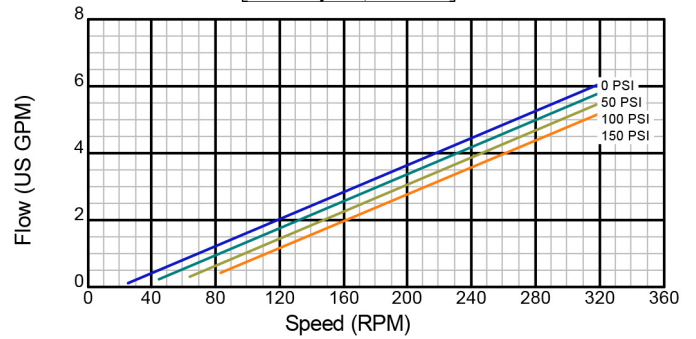

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on November 30, 2000




# Model 4304/4324



Iron Construction

Standard Clearance


1.5" Std. Port Size

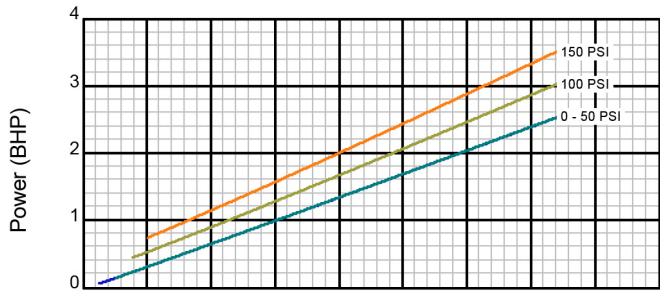

Viscosity: 10,000 SSU

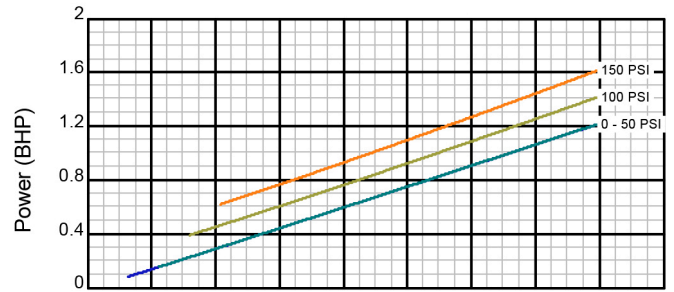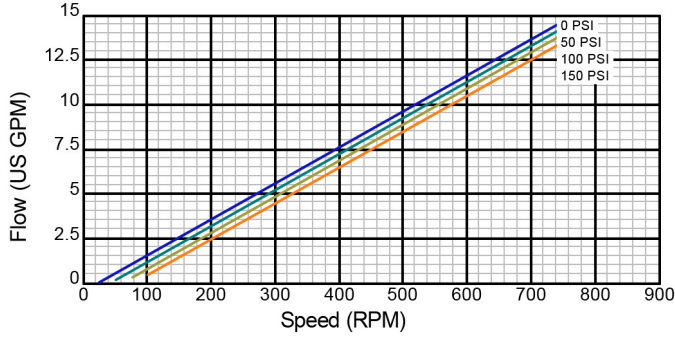

Viscosity: 25,000 SSU

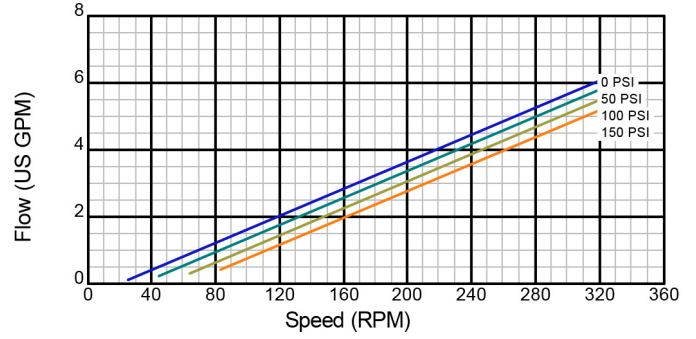

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 4305/4325



Iron Construction

Standard Clearance



1.5" Std. Port Size

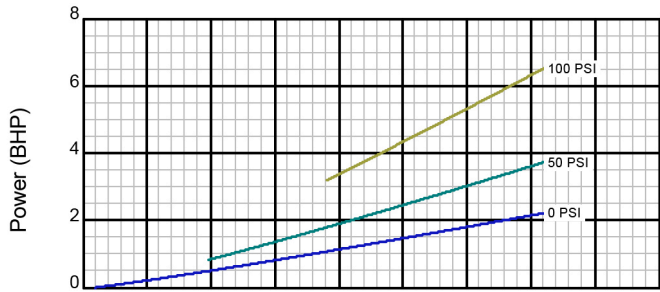



Viscosity: 32 SSU

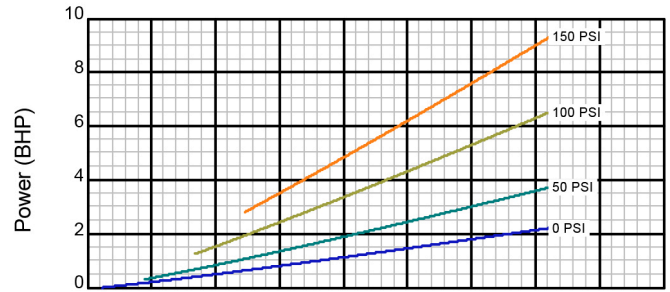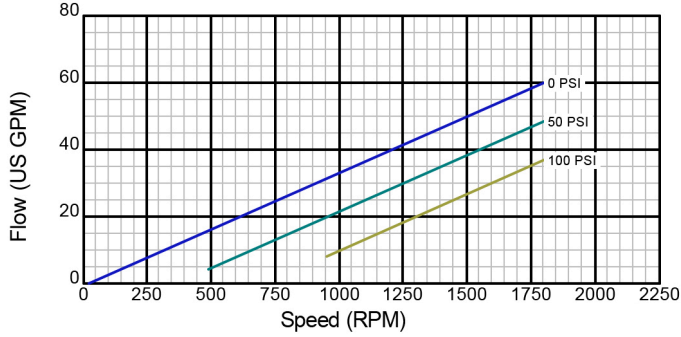


Viscosity: 100 SSU

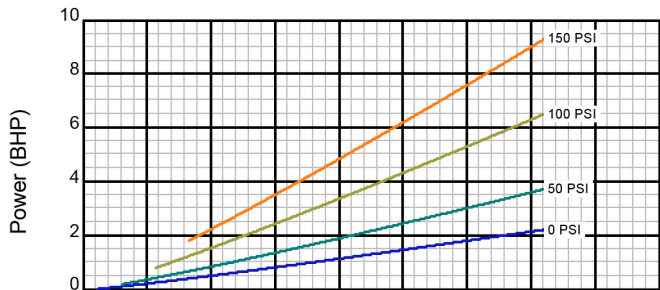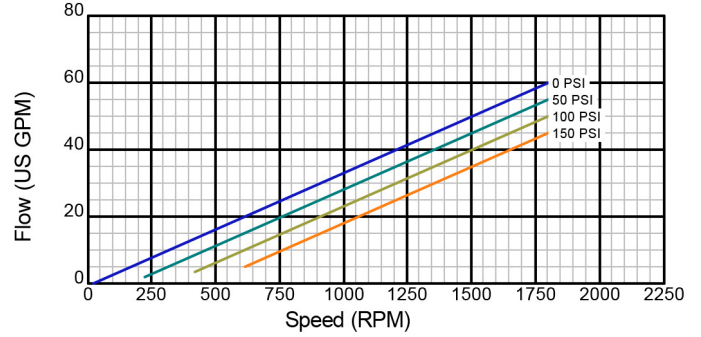

Viscosity: 200 SSU

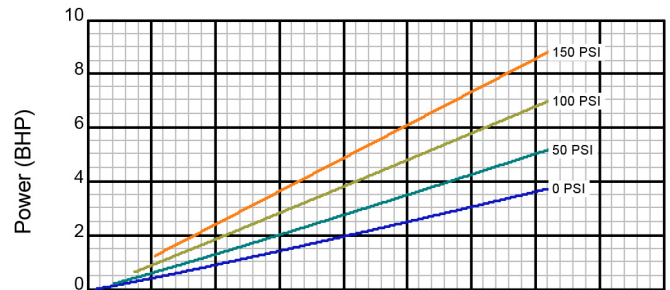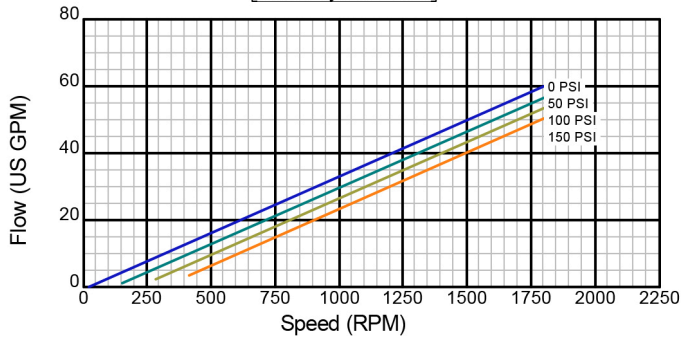

Viscosity: 500 SSU

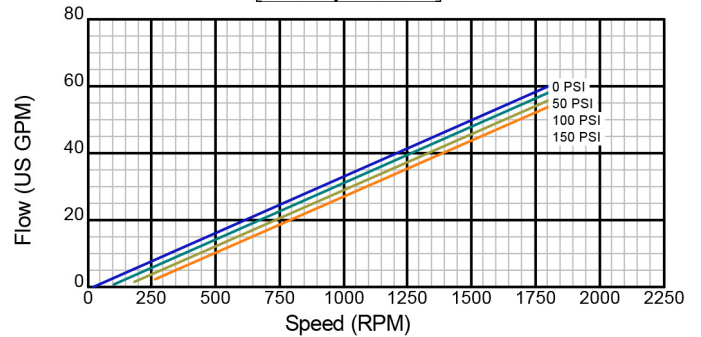

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 4305/4325



Iron Construction

Standard Clearance



1.5" Std. Port Size

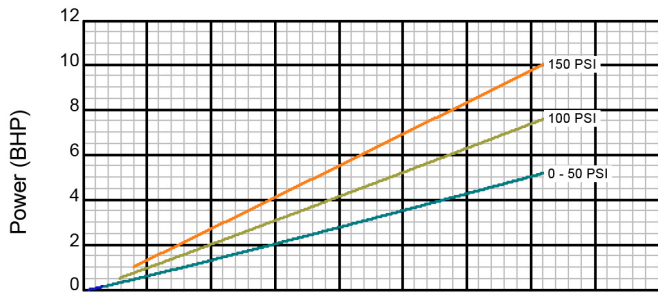



Viscosity: 1,000 SSU

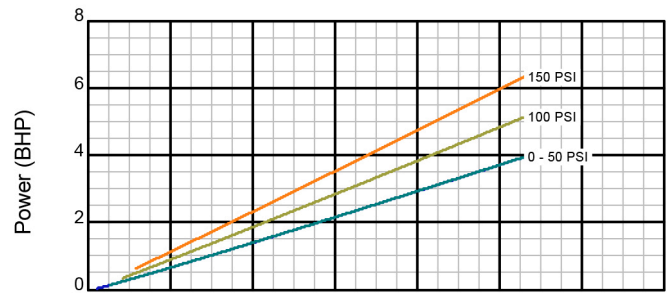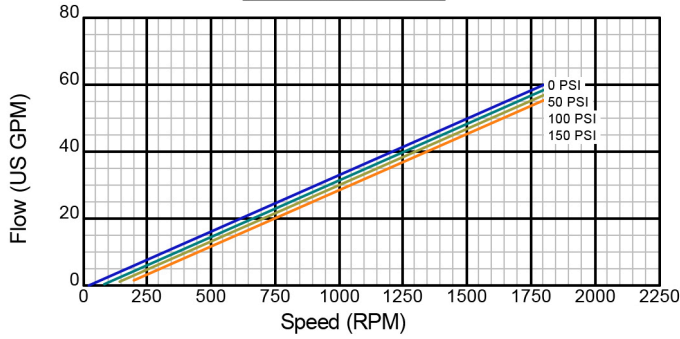


Viscosity: 5,000 SSU

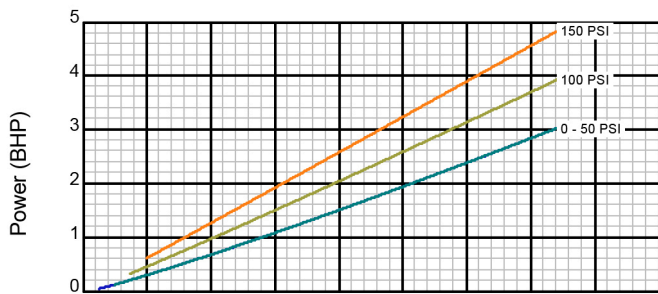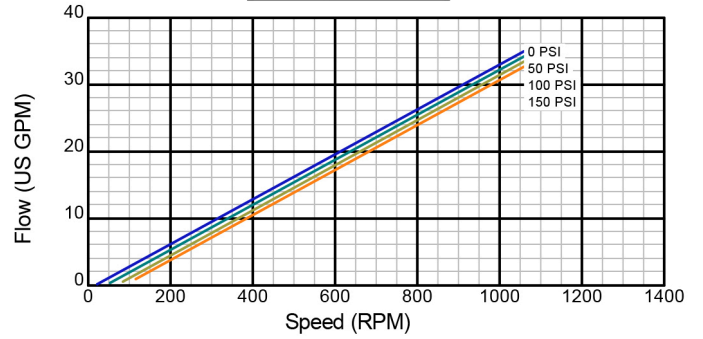

Viscosity: 10,000 SSU

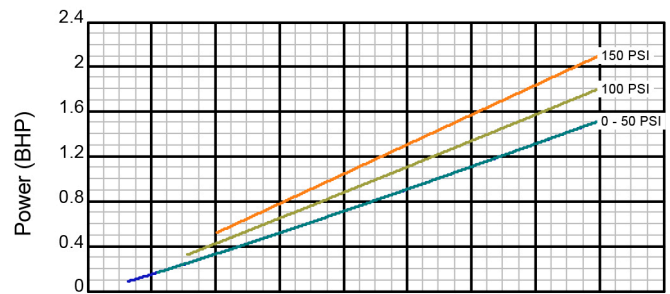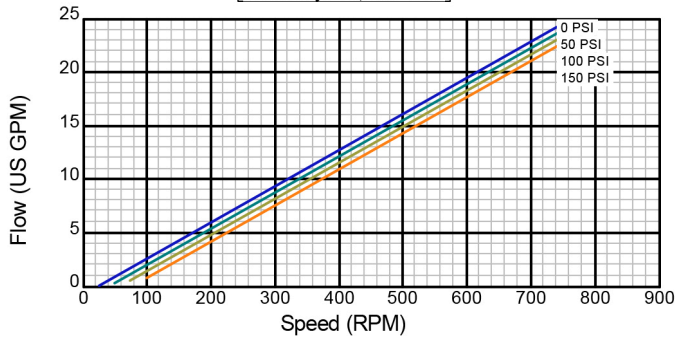

Viscosity: 25,000 SSU

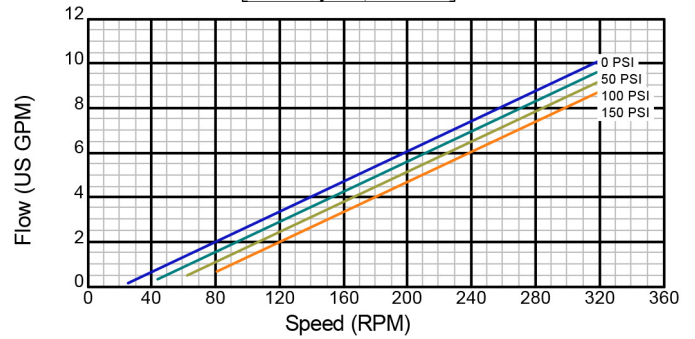

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 4305/4325



Iron Construction

Standard Clearance


1.5" Std. Port Size

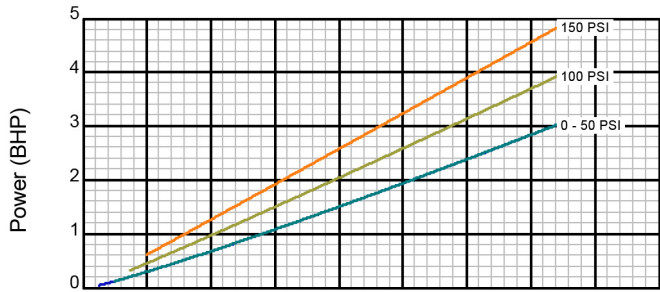

Viscosity: 10,000 SSU

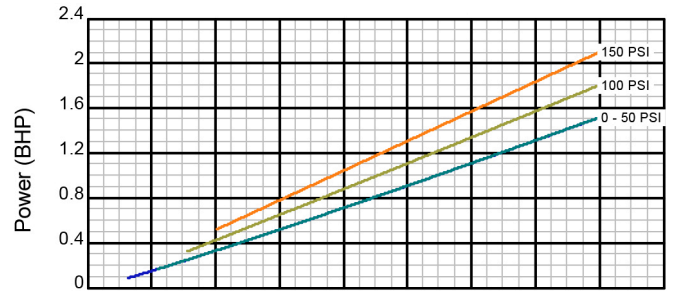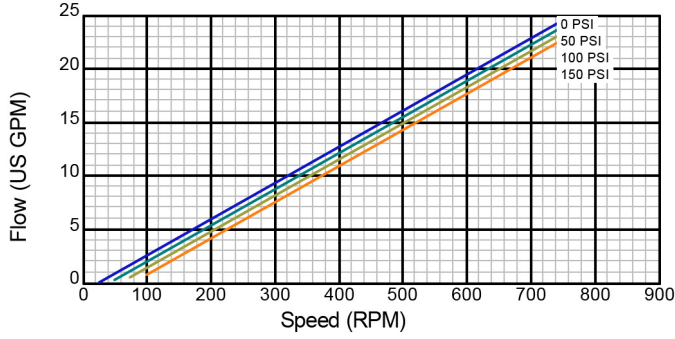

Viscosity: 25,000 SSU

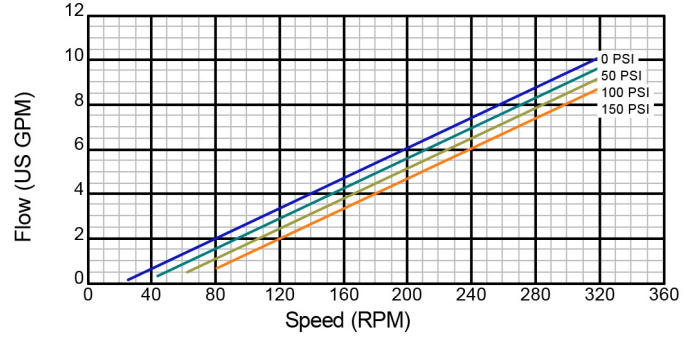

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 4306/4326



Iron Construction

Standard Clearance



2" Std. Port Size

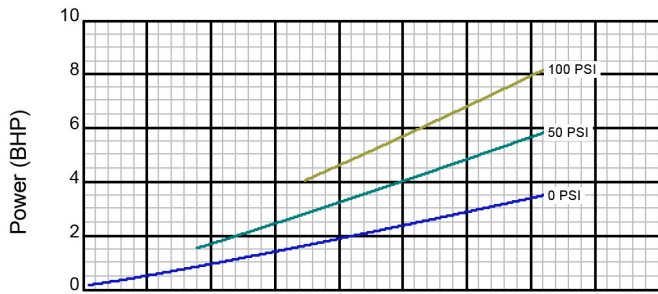



Viscosity: 32 SSU

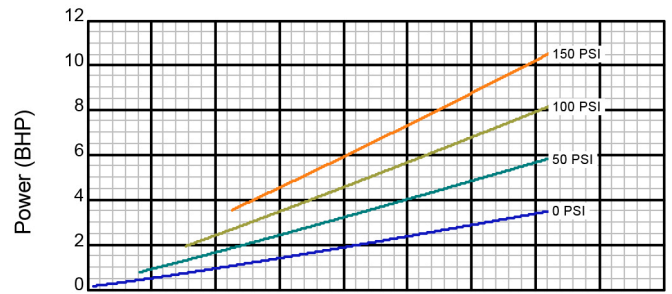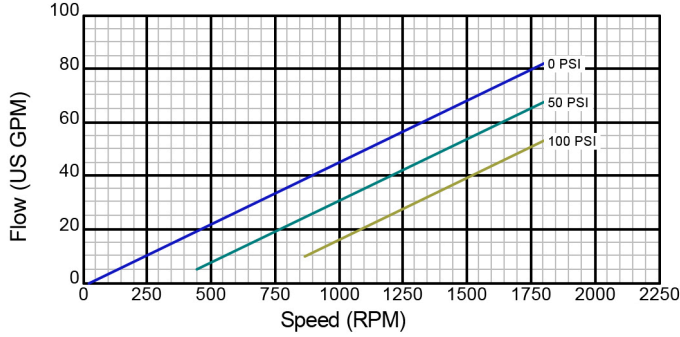


Viscosity: 100 SSU

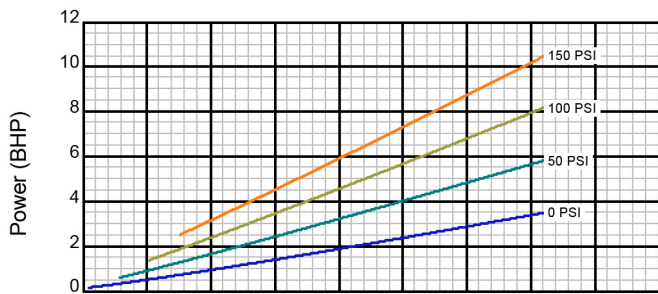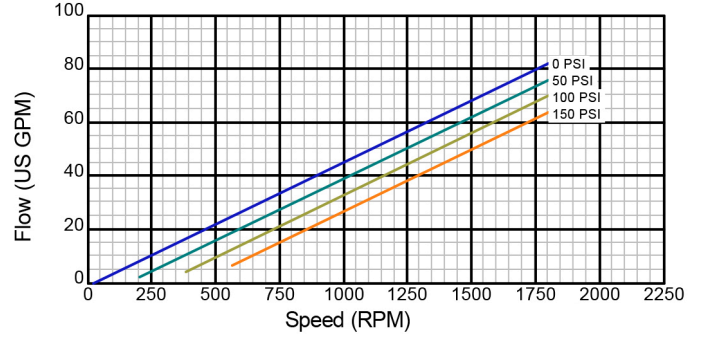

Viscosity: 200 SSU

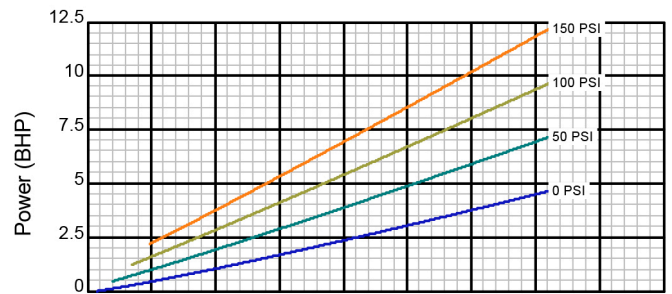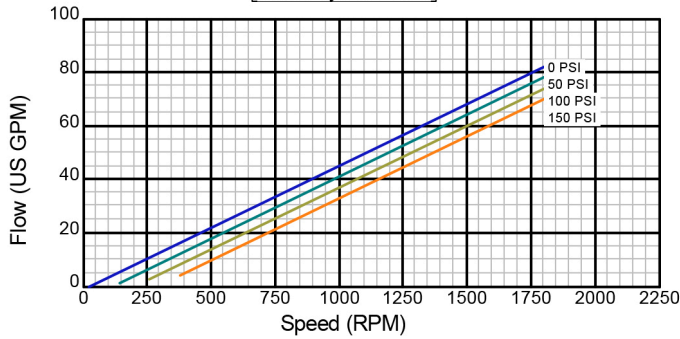

Viscosity: 500 SSU

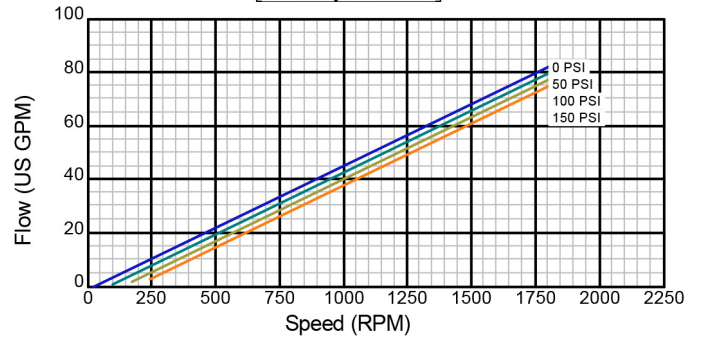

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 4306/4326



Iron Construction

Standard Clearance



2" Std. Port Size

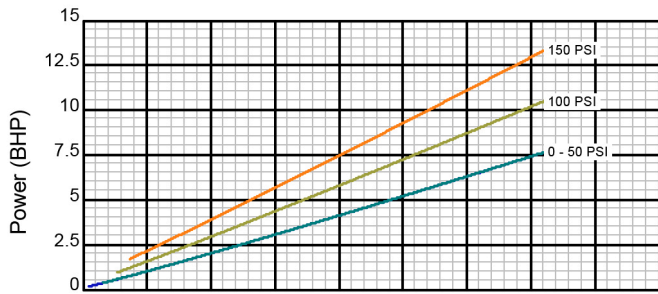



Viscosity: 1,000 SSU

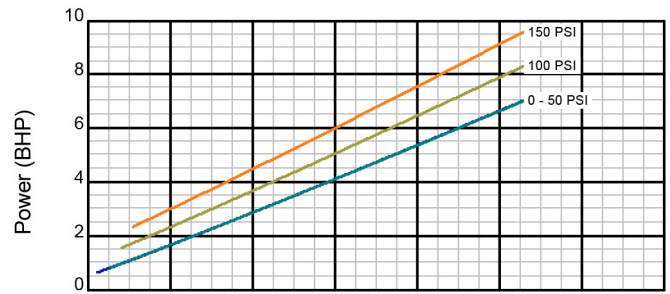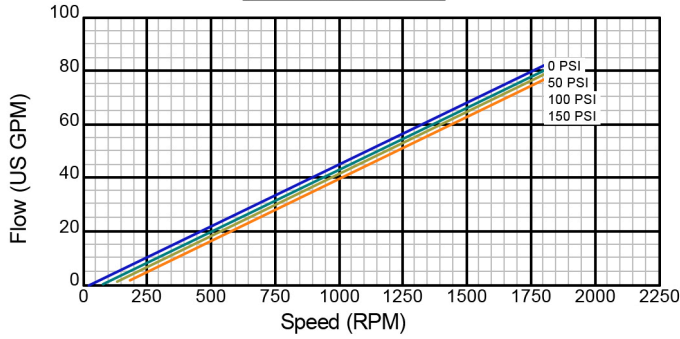


Viscosity: 5,000 SSU

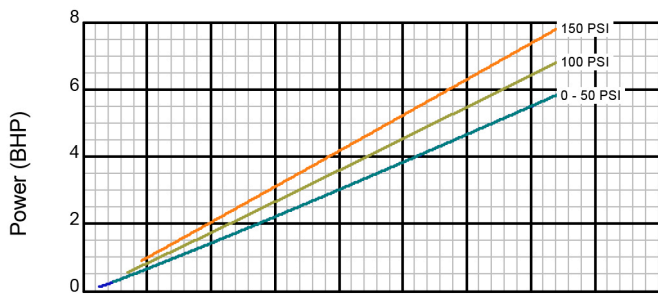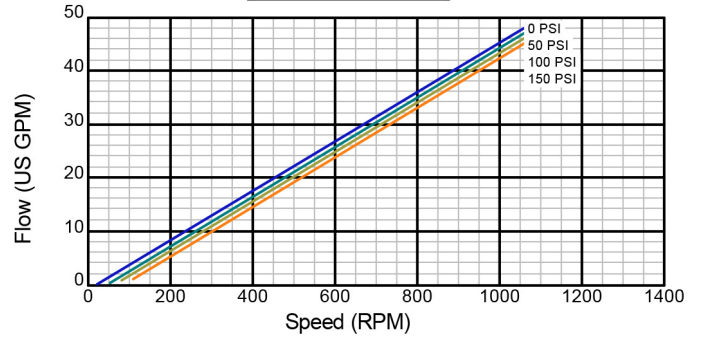

Viscosity: 10,000 SSU

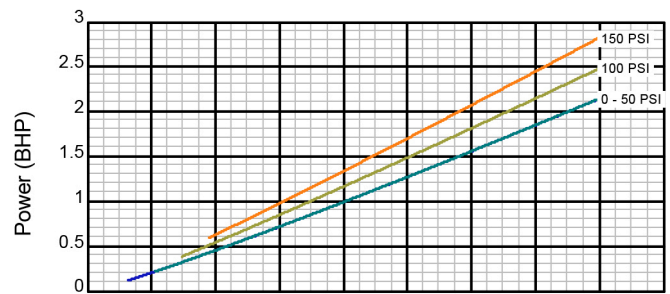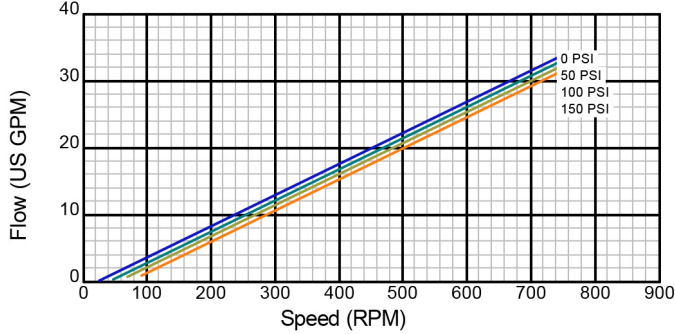

Viscosity: 25,000 SSU

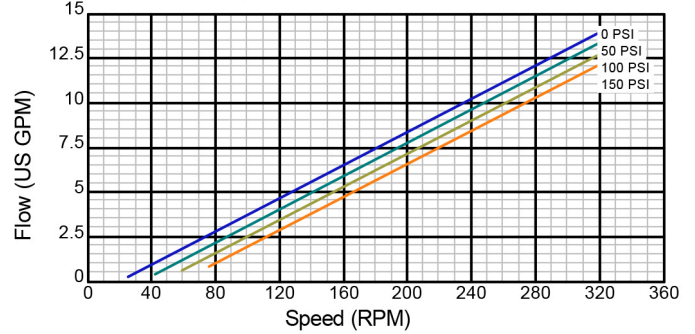

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 4306/4326



Iron Construction

Standard Clearance


2" Std. Port Size

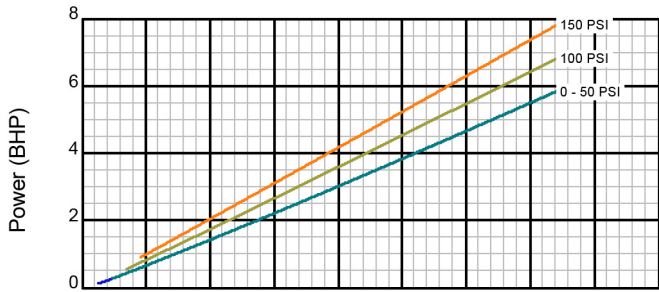

Viscosity: 10,000 SSU

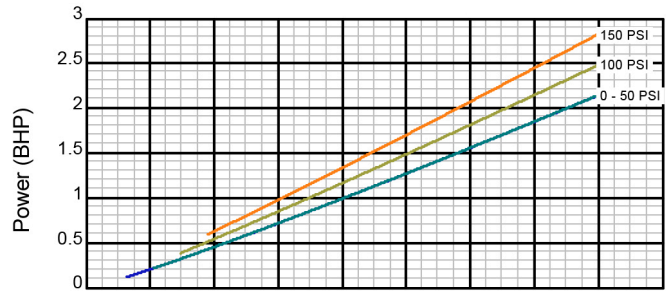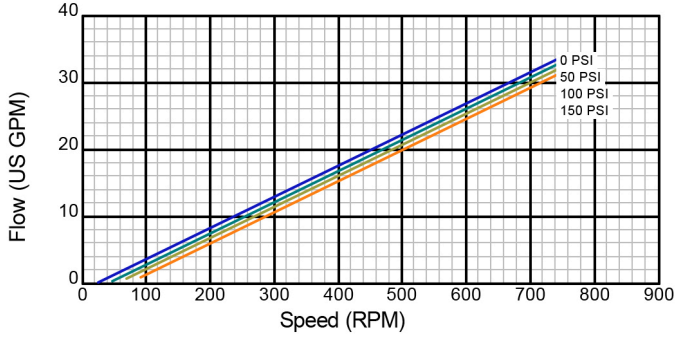

Viscosity: 25,000 SSU

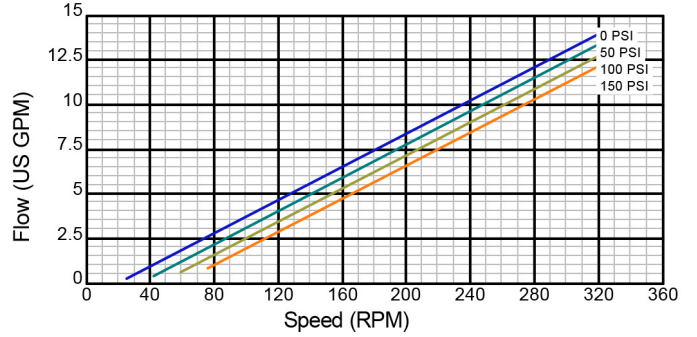

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on November 30, 2000

**Tuthill Pump Group**

12500 S. Pulaski Road, Alsip, IL 60803

[www.tuthillpump.com](http://www.tuthillpump.com)

Excellence at work. Excellence in life.