

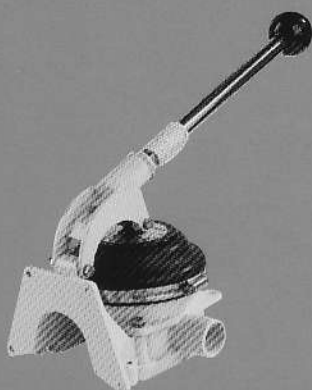
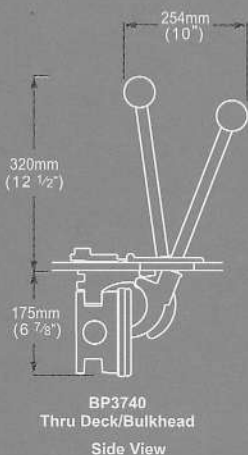


Bilge Pumps

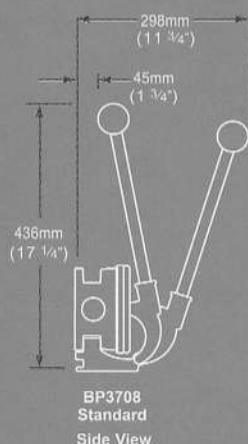

Gusher® 10 Mk 3
5 Year Warranty

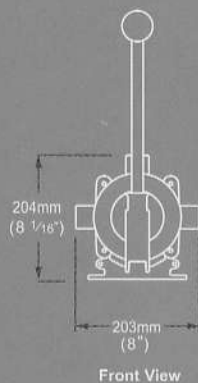

Gusher® 10 Mk 3

Diecast Alloy Bilge Pump

- Anodised diecast alloy for long life
- Robust design for tough conditions
- Designed for instant access and easy maintenance
- High flow non-choke valves, 65 ltrs (17 US gals) per minute
- Bulkhead, floor or thru deck mounting
- Suitable for use on boats over 12 m (40 ft)

Typical Uses

- Emergency bilge pump out
- Holding tank pump out
- Toilet flush

Model Specifications

Model	Standard	Thru Deck / Bulkhead
Product Code	BP3708	BP3740
Weight	2.3 kg (5 lbs)	
Hose Connections	38 mm (1 1/2") Smooth Hose Connections	
Materials	Pump Body: Marine Grade LM6 Aluminium Alloy (epoxy coated) Diaphragm: Neoprene (Nitrile option available) Fasteners: Stainless Steel	
Materials Contact With Fluid	Marine Grade LM6 Aluminium Alloy (Epoxy Coated) Neoprene, Nitrile, Stainless Steel	
Service Kits	AK3706 - Neoprene Parts AK3714 - Nitrile Parts for Oil and Diesel Contains: Diaphragm, Valves, Seals	
Accessories	DP3801 - Alloy Deck Plate DP8901 - Plastic Deck Plate Lid AK4405 - Spare Handle	
Maximum Suction Lift	4 m (13.5 ft)	
Maximum Discharge Head	4 m (13.5 ft)	

Performance Data

	BP3708 / BP3740	BP3708 / BP3740
Suction Lift	1 m (3 ft)	2 m (6 ft)
Discharge Head	0.5 m (1.5 ft)	0.5 m (1.5 ft)
45 Strokes per Minute	41 ltrs (11 US gals)	41 ltrs (11 US gals)
70 Strokes per Minute	65 ltrs (17 US gals)	65 ltrs (17 US gals)

Skin fitting 38mm (1 1/2") SF5425

Typical
Installation

