

# SELF-PRIMING SHOWER SUMP PUMPS

CONTENTS

PUMPING PRINCIPLES

ENGINE COOLING

ENGINEERING TABLES

TROUBLE-SHOOTING GUIDE

INDEX

HOME

NEXT

BACK

## 3.3 GPM FLOJET 4105 SERIES SHOWER PUMP

The Flojet 4105 shower and grey water pump will lift water up to 10 feet and will not be damaged by running dry. It can be operated with a manual on/off switch or automatic level control (see page 30) and comes standard with 1/2" barbed ports. However, 3/4" barbed port fittings (page 58) and suction strainers (page 59) are available separately. See page 138 for service parts.

Model Number	Volts	Amps at 10 psi	Max GPM	Inlet/Outlet Ports	Dimensions (H x W x L)
FJ 04105-143	12 vdc	3.6	3.3	1/2" Barb	3 3/4" x 6 1/3" x 8 1/4"
FJ 04105-343	24 vdc	1.8	3.3	1/2" Barb	3 3/4" x 6 1/3" x 8 1/4"

### FLOJET




## 3.4 GPM JABSCO 31610 SERIES SHOWER PUMP

Jabco's 31610 series shower and grey water pump comes standard with a continuous duty DC motor with a waterproof coating for harsh bilge environments. They can be operated with a manual on/off switch or automatic level control (see page 30), will self-prime to 10 feet, come with 3/4" barbed ports and includes a 3/4" suction strainer. See page 139 for service parts.

Model Number	Volts	Amps at 10 psi	Max GPM	Inlet/Outlet Ports	Dimensions (H x W x L)
JA 31610-0092	12 vdc	5	3.4	3/4" Barb	4.1" x 4.2" x 7.7"
JA 31610-0094	24 vdc	3	3.4	3/4" Barb	4.1" x 4.2" x 7.7"

### JABSCO

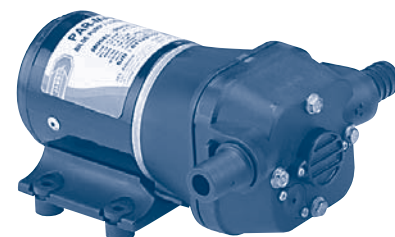

## 4 - 4.5 GPM, 12 - 24 - 32 VDC, FOR BILGE AND SHOWER SUMP

These classic Jabco "PAR" shower and grey water pumps utilize the original Peters and Russell design that has dependably served the marine industry for over 40 years! They can be operated with a manual on/off switch or automatic level control (see page 30), will self-prime to 6 feet, come with 3/4" barbed ports and include a 3/4" suction strainer. See page 135 and 136 for service parts.

Model Number	Volts	Amp Draw	Max GPM	Inlet/Outlet Ports	Dimensions (H x W x L)
JA 37202-0000	12 vdc	7.5	4.5	3/4" Barb	6" x 4 1/8" x 7 5/8"
JA 37202-0010	24 vdc	6.5	4.5	3/4" Barb	6" x 4 1/8" x 7 5/8"
JA 36960-2000	12 vdc	6	4	3/4" Barb	7 1/4" x 4 1/16" x 7 5/16"
JA 36960-2010	24 vdc	5	4	3/4" Barb	7 1/4" x 4 1/16" x 7 5/16"
JA 36960-2020	32 vdc	2	4	3/4" Barb	7 1/4" x 4 1/16" x 7 5/16"

### JABSCO



## 3.5 GPM WHALE GULPER 220 SHOWER PUMP

The Whale Gulper 220 shower and grey water pump incorporates inlet and outlet duckbill valves that are specifically designed to pump wastewater without clogging. This eliminates the need for a suction filter. Each pump can be operated with a manual on/off switch or automatic level control (see page 30), will self-prime to 12 feet vertically, run dry without damage and come with 3/4" barbed ports that can be repositioned in any inline direction by loosening the body clamp ring. (Repair Kit = IM AK1550)

Model Number	Volts	Amp Draw	Max GPM	Inlet/Outlet Ports	Dimensions (H x W x L)
IM BP1552	12 vdc	10	3.5	3/4" Barb	4 5/8" x 6 3/4" x 10 3/4"
IM BP1554	24 vdc	6	3.5	3/4" Barb	4 5/8" x 6 3/4" x 10 3/4"

### WHALE

