


# AUTOMATIC SUBMERSIBLES

## LOVETT

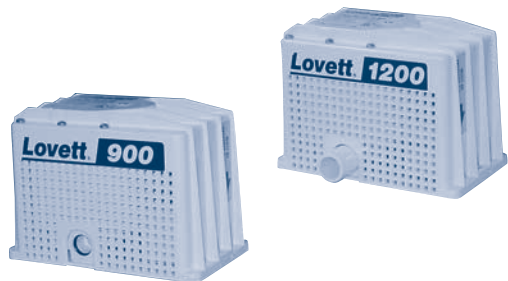

Heavy Duty "Repairable" Series

## HEAVY DUTY "REPAIRABLE" PUMPS IN 6 - 32 VDC

Lovett automatic bilge pumps will not airlock! Lovett's patented design incorporates two belts running over phenolic pulleys to transmit power from motor shaft to pump shaft all within the trapped air cavity the pump housing creates. This air pocket eliminates the need for a shaft seal to wear or corrode, the most frequent cause of pump failure. Service kit #LV 3200 (belts, switch and gasket). Replacement belt only #LV 2101.

| Model          | GPH at 0 Feet | Volts  | Amps | Outlet | Dimensions (H x W x L) |
|----------------|---------------|--------|------|--------|------------------------|
| LV 1200-12V AM | 1193          | 12 vdc | 5    | 1 1/8" | 5 1/4" x 5 11/16" x 8" |
| LV 1200-24V AM | 1193          | 24 vdc | 3    | 1 1/8" | 5 1/4" x 5 11/16" x 8" |
| LV 1200-32V AM | 1193          | 32 vdc | 3    | 1 1/8" | 5 1/4" x 5 11/16" x 8" |
| LV 900-12V AM  | 900           | 12 vdc | 5    | 3/4"   | 5 1/4" x 5 11/16" x 8" |
| LV 900-6V AM   | 900           | 6 vdc  | 10   | 3/4"   | 5 1/4" x 5 11/16" x 8" |
| LV 900-24V AM  | 900           | 24 vdc | 3    | 3/4"   | 5 1/4" x 5 11/16" x 8" |
| LV 900-32V AM  | 900           | 32 vdc | 8    | 3/4"   | 5 1/4" x 5 11/16" x 8" |

## RULE



Computerized Series

## COMPUTERIZED PUMPS IN 12 VDC AND 110 VAC

Rule's computerized bilge pumps operate on the principle of impeller resistance. Every 2 1/2 minutes the pump operates to check for water. If water is present, amp draw is higher and the pump remains in operation. Once the pump has evacuated the water the amp draw drops and the pump shuts off.

| Model No.  | GPH at 0 Feet | Max. Head | Volts   | Amps/Watts | Hose Dia. | Dimensions (H x W x L)   |
|------------|---------------|-----------|---------|------------|-----------|--------------------------|
| RU 1745    | 8000          | 27'       | 12 vdc  | 40A        | 3"        | 9 1/4" x 12" x 4 7/8"    |
| RU 565     | 4000          | 27'       | 12 vdc  | 20A        | 2"        | 9 1/4" x 4 7/8" x 4 7/8" |
| RU A55S-18 | 2800          | 22'       | 110 vac | 175W       | 1 1/2"    | 8 3/4" x 4 7/8" x 4 7/8" |
| RU 535     | 2000          | 21'       | 12 vdc  | 12A        | 1 1/8"    | 7 3/4" x 4 7/8" x 4 7/8" |
| RU A53S-18 | 1800          | 18'       | 110 vac | 100W       | 1 1/8"    | 7 3/4" x 4 7/8" x 4 7/8" |
| RU 275     | 1100          | 12'       | 12 vdc  | 5A         | 1 1/8"    | 4 1/2" x 2 3/8" x 2 3/8" |
| RU 255     | 500           | 12'       | 12 vdc  | 2.5A       | 3/4"      | 4" x 2 3/8" x 2 3/8"     |

## RULE



Compact Automatic Series

## COMPACT PUMPS IN 12 VDC

These pumps feature a non-mercury float switch in a single, compact housing. As the water level rises so does the float switch activating the pump when the water level reaches 2 1/8". There is no on/off cycling and therefore no power use until the pump comes on. The pump remains on until the float drops and the pump senses lower amp draw caused by the absence of water.

| Model No.  | GPH at 0 Feet | Max. Head | Volts  | Amps | Hose Dia. | Dimensions (H x W x L) |
|------------|---------------|-----------|--------|------|-----------|------------------------|
| RU RM-1100 | 1100          | 12'       | 12 vdc | 5    | 1 1/8"    | 4" x 2 1/2" x 5"       |
| RU RM-750  | 750           | 12'       | 12 vdc | 4    | 3/4"      | 4" x 2 1/2" x 5"       |
| RU RM-500  | 500           | 12'       | 12 vdc | 2.5  | 3/4"      | 4" x 2 1/2" x 5"       |
| RU RM-1500 | 1500          | 12'       | 12 vdc | 7    | 1 1/8"    | 6" x 4 7/8" x 7 1/4"   |
| RU RM-2000 | 2000          | 16'       | 12 vdc | 12   | 1 1/8"    | 6" x 4 7/8" x 7 1/4"   |

## SHURFLO



Magnetic Drive Series

## MAGNETIC DRIVE PUMPS IN 12 VDC

These innovative pumps are specially designed for exceptional durability and reliability. These magnetic drive, automatic bilge pumps will clear airlocks, will run dry and won't burn up if clogged. If the impeller locks up, the magnets simply break free, protecting the motor from burnout. Pumps turn on only when needed. Cleaning is fast and easy.

| Model No.       | GPH at 0 Feet | Description       | Hose Dia. | Dimensions (H x W x L)   |
|-----------------|---------------|-------------------|-----------|--------------------------|
| SF 1700-121-010 | 1000          | 12 vdc Cont. Duty | 1 1/8"    | 6 1/2" x 5 1/4" x 5 1/4" |
| SF 1700-101-010 | 500           | 12 vdc Cont. Duty | 3/4"      | 6 1/2" x 5 1/4" x 5 1/4" |

CONTENTS

PUMPING PRINCIPLES

ENGINE COOLING

ENGINEERING TABLES

TROUBLE-SHOOTING GUIDE

INDEX

HOME

NEXT

BACK