

JABSCO OIL CHANGE / DIESEL TRANSFER

CONTENTS

REVERSIBLE OIL CHANGE / DIESEL TRANSFER

These Jabsco pumps utilize the proven vane pump design, which is ideally suited for oil and diesel transfer. Each pump comes equipped with a three-way reversible switch that allows the removal of the old oil and the filling of the new. These pumps can be installed with a manifold (as shown on the bottom of the opposite page) to create a complete oil change system for your vessel. Each pump has 1/2" FPT internal ports with 1" external hose barbs. The service kit includes the vanes, rotor, o-ring, and seal and can be ordered under the number JA 90200-0001.

PUMPING PRINCIPLES

ENGINE COOLING

ENGINEERING TABLES

TROUBLE-SHOOTING GUIDE

INDEX

HOME

NEXT

BACK

Model Number	Volts	Amp Draw	Max GPM	Inlet/Outlet Ports	Dimensions (H x W x L)
JA 18680-1000	12 vdc	8	6	1/2" FPT and 1" Slip-On	3 3/8" x 4 3/4" x 8"

JABSCO



Reversible

OIL CHANGE / DIESEL TRANSFER PUMPS

These Jabsco pumps are ideal for oil change or diesel transfer where a reversing switch is not required. Each pump has 1/2" FPT internal ports with 1" external hose barbs. The service kit includes the vanes, rotor, o-ring, and seal and can be ordered under the number JA 90200-0001.

Model Number	Volts	Amp Draw	Max GPM	Inlet/Outlet Ports	Dimensions (H x W x L)
JA 18680-0920	12 vdc	8	6	1/2" FPT and 1" Slip-On	3 3/8" x 4 3/4" x 7 1/8"
JA 18680-0940	24 vdc	5	6	1/2" FPT and 1" Slip-On	3 3/8" x 4 3/4" x 7 1/8"

JABSCO




Continuous Duty

115 VAC DIESEL TRANSFER PUMP

The Jabsco 115 vac 18685-0000 pump will empty a 55 gallon drum of diesel in 8 minutes! It comes with a 6-foot power cord and has 1/2" FPT internal ports with 1" external hose barbs. The service kit includes the vanes, rotor, o-ring, and seal and can be ordered under the number JA 90200-0001.

Model Number	Volts	Max GPM	Inlet/Outlet Ports	Dimensions (H x W x L)
JA 18685-0000	115 vac	7	1/2" FPT and 1" Slip-On	6" x 4 3/4" x 9 1/2"

JABSCO

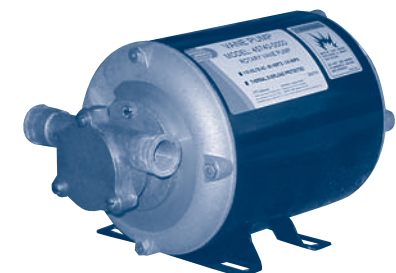


115 vac Voltage

HIGH VOLUME DC DIESEL TRANSFER PUMPS

These Jabsco high volume pumps are available in 12 and 24 vdc and 9, and 12 gpm flows. The 50130 series has the added feature of an internal by-pass. This allows the fuel to be by-passed within the pump while the discharge line is restricted or shut-off during operation. This feature enables the user to start and stop the flow with a nozzle at the end of the hose, eliminating the need of controlling the flow with the power switch.

Model Number	Volts	Amp Draw	Max GPM	Inlet/Outlet Ports	Dimensions (H x W x L)
JA 50130-1000	12 vdc	13	9	3/4" Barb	4" x 7" x 6 3/8"
JA 50130-1100	24 vdc	6	9	3/4" Barb	4" x 7" x 6 3/8"
JA VR050-1022	12 vdc	12	14	1" Barb	5 3/4" x 5" x 8 1/2"
JA VR050-1122	24 vdc	6	14	1" Barb	5 3/4" x 5" x 8 1/2"
JA VR100-1122	24 vdc	20	25	1 1/4" Barb	7 1/4" x 5 3/4" x 10 1/2"

JABSCO

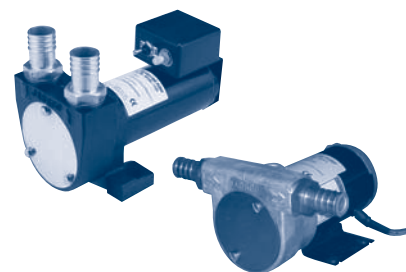

High Volume