

MAGNETIC DRIVE FLOODED SUCTION

CONTENTS

PUMPING PRINCIPLES

ENGINE COOLING

ENGINEERING TABLES

TROUBLE-SHOOTING GUIDE

INDEX


HOME

NEXT


BACK

UP TO 18 GPM, 29 TDH

- Temperatures to 250°F
- Open impeller
- 1" FPT x 1/2" MPT ports
- Materials in contact with liquid: Polypro, ceramic, Buna or Viton®
- Common models
AC-5C-MD: 115 or 230 vac, open motor
TE-5C-MD: 115 or 230 vac, TEFC motor

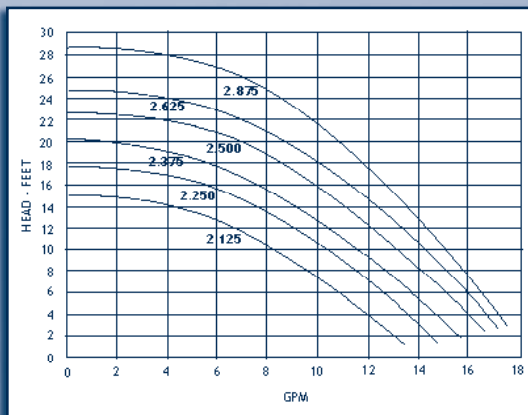


MARCH

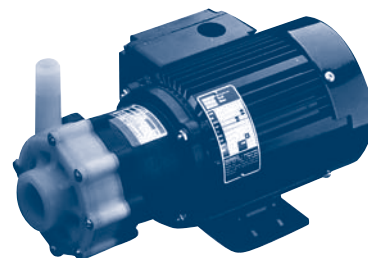


TE 5C-MD Series

UP TO 30 GPM, 41 TDH

- Temperatures to 250°F
- Closed impeller
- 1" FPT x 3/4" MPT ports
- Construction: Polypro, Kynar or 316SS
- Materials in contact with solution: housing material, ceramic and Viton® (5.5S has carbon bushing)
- Common models
TE-5.5C-MD: 115, 230 or 460 vac, TEFC motor
TE-5.5C-MD/AC: 115 vac ODP motor

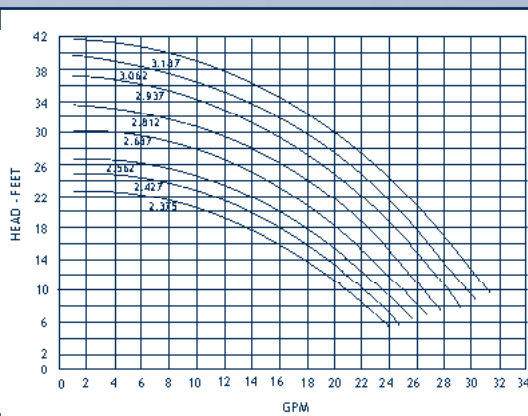


MARCH

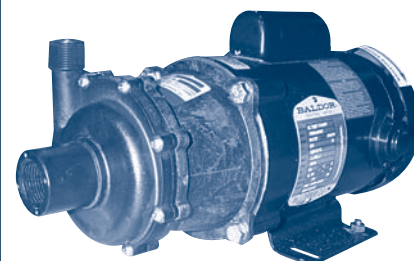


TE-5.5 Series

UP TO 34 GPM, 49 TDH

- Temperatures to 200°F
- Enclosed impeller
- 1" FPT x 3/4" MPT ports
- Materials in contact with liquid: GF Polypro, Ryton, ceramic, Viton® Teflon®/Ryton bushing
- Common models
DP-6T-MD: 115, 230 or 460 vac, open motor
TE-6T-MD: 115, 230 or 460 vac, TEFC motor

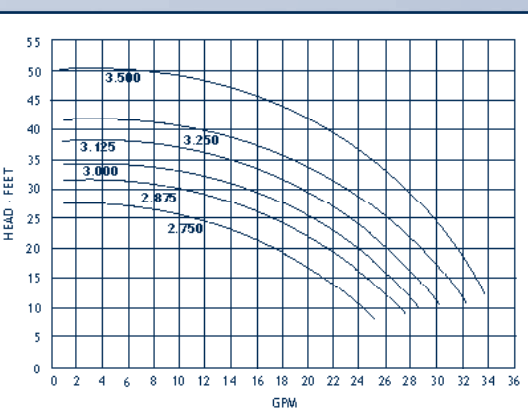


MARCH

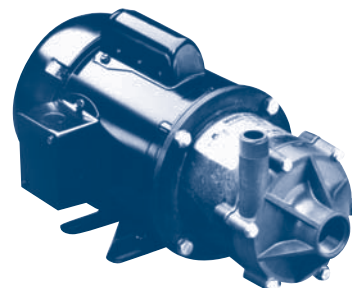


TE-6 Series

UP TO 50 GPM, 60 TDH

- Temperatures to 250°F
- Enclosed impeller
- 1 1/2" FPT x 1" MPT Ports
- Construction: GF Polypro, Kynar, Hastelloy C or 316SS
- Materials in contact with liquid: Polypro, ceramic, Viton® and Teflon®/Ryton bushing
- Common models
TE-7R-MD: 115, 230 or 460 vac, TEFC motor
- Also available in self-priming

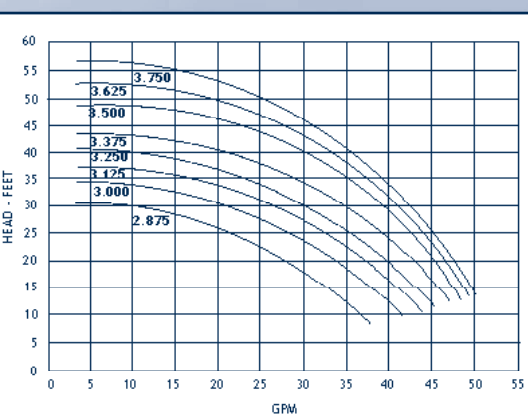

MARCH

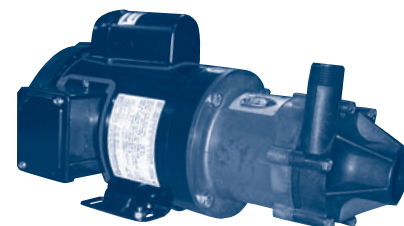

TE-7 Series