


LIVEWELL AND LOW PRESSURE WASHDOWN

PRIMETIME



Stainless Self-Primer

3/4" STAINLESS SELF-PRIMER IN AC AND DC

The "Primetime" self-primer will not air-lock. It is ideal for an installation that is prone to air-lock or requires a suction lift of up to 6 feet. This rugged cast 316 stainless steel pump comes equipped with a carbon/ceramic mechanical seal, 3/4" x 3/4" FPT ports and solid 316 stainless steel impeller.

Model Number	Hz.	Port Size	GPH at Feet of Head					Max. Head
			5'	10'	15'	20'	25'	
DP Primetime 115v	60	3/4" FPT	1260	1110	900	570	300	24'
DP Primetime 115/230v	50/60	3/4" FPT	1260	1110	900	570	300	24'
DP Primetime 12v	DC	3/4" FPT	1110	820	510	-	-	18.5'
DP Primetime 24v	DC	3/4" FPT	1110	820	510	-	-	18.5'

CONTENTS

ENGINE COOLING


INDEX

HOME

NEXT

BACK

MP / OBERDORFER

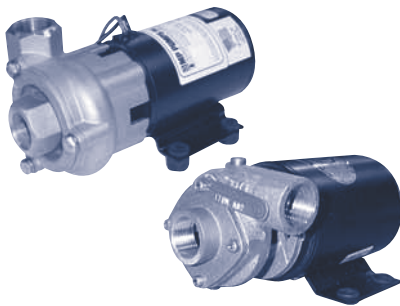


316SS and Bronze

3/4" 316SS AND BRONZE RECIRCULATORS IN AC AND DC

Oberdorfer and MP recirculators require flooded suction and are available in AC and DC voltages. The MP series are 316 stainless steel and come standard with a Viton mechanical seal. The Oberdorfer series are constructed of bronze and come with a Buna lip or mechanical seal.

Model Number	Brand	Volts	Hz	GPM at Feet of Head			Max Head	Seal Type
				0'	5'	10'		
OB 172B-B26	Oberdorfer	115 vac	50/60	18	15	10	14'	Mechanical
OB 172B-B27	Oberdorfer	230 vac	50/60	18	15	10	14'	Mechanical
OB 172B-Series	Oberdorfer	12, 24 or 32 vdc		20	14	6	14'	Mechanical
OB 170M-Series	Oberdorfer	12, 24 or 32 vdc		20	14	6	14'	Lip
MP FRX75	MP	12, 24 vdc / 115 vac	60	26	26	26	28'	Mechanical
MP FRX50	MP	12, 24 vdc / 115 vac	60	12.5	12	7.5	19'	Mechanical

GROCO

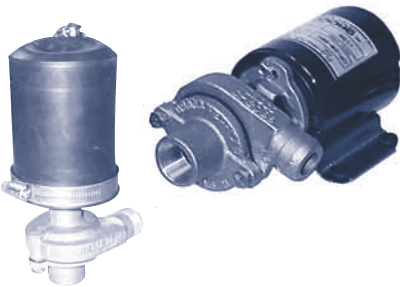


Submersible or Open-Air

3/4" SPLASH PROOF RECIRCULATORS IN 12, 24 AND 32 VDC

This unique pump series adds a submersible motor boot to Groco's successful flanged suction bronze recirculation pump line creating a waterproof recirculator for wet or submerged environments. Groco's original recirculators are also available with their continuous duty non-submersible motors (listed below). All models come standard with a mechanical seal. See page 157 for service parts.

Model Number	Volts DC	Motor Enclosure	GPM at Feet of Head			Duty	Dimensions
			0'	5'	10'		
GC CP-20	12, 24 or 32	Non-Submersible	17	11.7	7.3	Cont.	3.5" x 4.5" x 7.75"
GC CP-20-S	12, 24 or 32	Submersible	17	11.7	7.3	Int.	3.5" x 4.5" x 8.75"

CYCLONE / AQUA TIGER

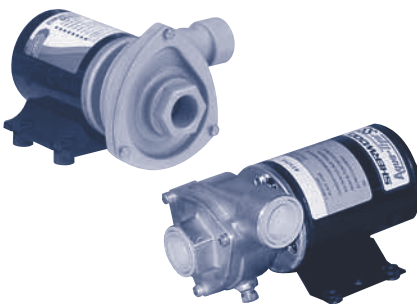

Jabsco / Sherwood

3/4" STAINLESS STEEL RECIRCULATORS IN 12 AND 24 VDC

These stainless centrifugals combine the corrosion resistance of a stainless steel housing and the long service life of a mechanical seal. Sherwood's AT12SS Aqua Tiger is an upgraded stainless version of the traditional bronze Jabsco, Oberdorfer and Groco recirculating pumps. Jabsco's 508X0 Cyclone series is a totally new design available in two types. One was engineered to deliver high flow while the other was engineered to deliver high pressure.

Model Number	Volts DC	Max. Amps	GPM at Feet of Head			Max. Head	Dimensions (H x W x L)
			0'	10'	25'		
SH AT12SS	12	5.5	20	15.5	-	21'	4 1/2" x 4 1/2" x 7 3/8"
JA 50840-0012	12	10	31	16	-	17.5'	4 1/2" x 4 1/2" x 6 5/8"
JA 50840-0024	24	5	31	16	-	17.5'	4 1/2" x 4 1/2" x 6 5/8"
JA 50870-0012	12	25	23.5	20	15	54'	4 1/2" x 4 1/2" x 7 5/8"
JA 50870-0024	24	15	23.5	20	15	54'	4 1/2" x 4 1/2" x 7 5/8"