

LIVEWELL AND LOW PRESSURE WASHDOWN

CONTENTS

ENGINE COOLING

INDEX

HOME


NEXT

BACK

12 VDC DUAL PORT PUMPS FOR WASHDOWN PUMP ATTACHMENT

Both series of these unique pumps include a separate 1/2" FPT suction port that allows the attachment of a self-priming high-pressure washdown pump (see page 22 and 23). The Shurflo "Sentry" magnetic drive series is sealless and will not air-lock. Rule utilizes their proven direct drive design to provide a dependable and economical solution.


Model Number	Brand	GPH	Suction / Discharge	Amp Draw
SF 1700-001-030	Shurflo	500	3/4" MPT / 3/4" Male Barb	1.5
SF 1700-011-030	Shurflo	800	3/4" MPT / 3/4" Male Barb	2.75
SF 1700-021-030	Shurflo	1100	3/4" MPT / 1 1/8" Barb	3.75
RU 401FC	Rule	500	3/4" MPT / 3/4" Barb	2.5
RU 403FC	Rule	800	3/4" MPT / 3/4" Barb	5
RU 405FC	Rule	1100	3/4" MPT / 3/4" Barb	6
RU 209FDP	Rule	1600	1" MPT / 1 1/8" Barb	8.4

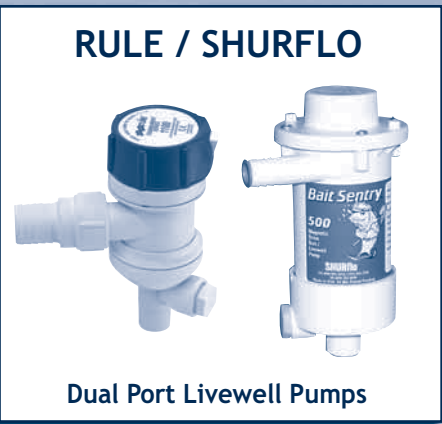

12 VDC THRU-HULL MOUNTED LIVEWELL PUMPS

Rule pumps are available in straight or angled thru-hull mounting to fit in the tightest bilge. Both mounting types are available in Rule's original or replaceable cartridge type configuration. The cartridge series allows for quick motor replacement without disturbing the thru-hull mounting.


Model Number	Thru-Hull Angle	GPH	Replacement Motor Cartridge	Suction / Discharge	Fuse Size
RU 401C	Angled	500	45DR	3/4" MPT / 3/4" Barb	2.5
RU 401STC	Straight	500	45DR	3/4" MPT / 3/4" Barb	2.5
RU 403C	Angled	800	46DR	3/4" MPT / 3/4" Barb	5
RU 403STC	Straight	800	46DR	3/4" MPT / 3/4" Barb	5
RU 405C	Angled	1100	47DR	3/4" MPT / 3/4" Barb	6
RU 405STC	Straight	1100	47DR	3/4" MPT / 3/4" Barb	6

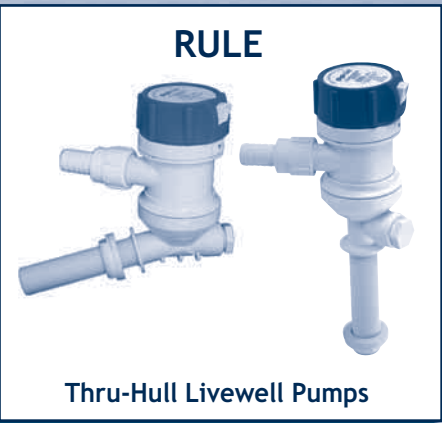

12 - 32 VDC HIGH CAPACITY BAITWELL/WASHDOWN PUMPS

These Rule pumps offer high flows for large baitwells, commercial livewells, and low-pressure washdown applications. The 207F mounts directly on a thru-hull with its 3/4" MPT suction port. The 209B model features a bronze base, anti-airlock feature and a heavy duty long life motor. The 17A - 19A series utilizes 1 1/2" slip-on ports to connect into your system.


Model Number	Volts	GPH	Suction / Discharge	Amp Draw
RU 207F	12 vdc	1600	1" MPT / 1 1/8" Barb	8.4
RU 17A	12 vdc	3800	1 1/2" Barb / 1 1/2" Barb	15.5
RU 18A	24 vdc	3700	1 1/2" Barb / 1 1/2" Barb	6.9
RU 19A	32 vdc	3700	1 1/2" Barb / 1 1/2" Barb	5.0
RU 209B	12 vdc	1600	1" MPT / 1 1/8" Barb	7.0

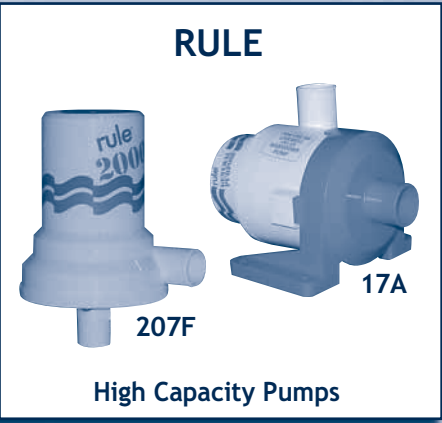

12 VDC TRANSOM MOUNT PUMPS

Rule introduces a lineup of transom mounted aerator pumps. This allows the fisherman to have professional aeration of his livewell without the need to install a pump through the hull. The unique "quick-release" pump with strainer base assembly snaps easily into the transom bracket provided. At the end of the day the pump can be removed for storage. Pumps feature 5' wire leads.

Model Number	GPH	Discharge	Amp Draw
RU 24 TB	360	3/4" ID Hose	1.9
RU 25 DTB	500	3/4" ID Hose	2.1
RU 20 RTB	800	3/4" ID Hose	2.8
RU 27 DTB	1100	1 1/8" ID Hose	3.3

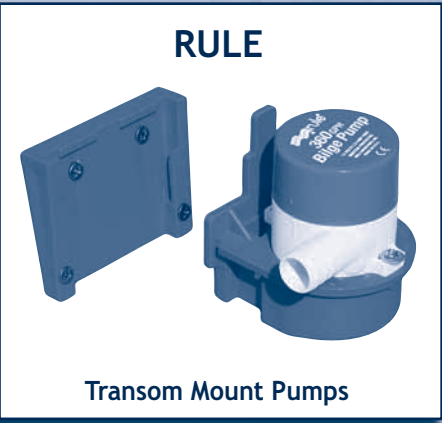

Use Rule's #78 and #75 spray heads for baitwell