

SELF-PRIMING RUN DRY BILGE PUMPS

CONTENTS

ENGINE COOLING

INDEX

HOME

NEXT


BACK

4.3 - 5.0 GPM, 12-24-32 VDC, BILGE AND BAITWELL

If compact size and low cost is important, these Jabsco and Flojet diaphragm bilge pumps are right for you! They will self-prime to 10 feet, run dry without damage, and come complete with a 3/4" suction strainer. Both brands will also function as a continuous duty baitwell pump. See page 154 and 155 for service parts.

| Model Number | Brand | Volts | Amps at 10 PSI | Flow GPM | Dimensions (H x W x L) | Port Size |
|---------------|--------|--------|----------------|----------|---------------------------|-----------|
| JA 31705-0092 | Jabsco | 12 vdc | 6 | 4.3 | 4 1/16" x 4 1/8" x 7 1/4" | 3/4" Barb |
| JA 31705-0094 | Jabsco | 24 vdc | 3 | 4.3 | 4 1/16" x 4 1/8" x 7 1/4" | 3/4" Barb |
| FJ 04125-114 | Flojet | 12 vdc | 8.5 | 5.0 | 3.9" x 6.3" x 9.9" | 3/4" Barb |
| FJ 04125-314 | Flojet | 24 vdc | 3.6 | 5.0 | 3.9" x 6.3" x 9.9" | 3/4" Barb |
| FJ 04125-414 | Flojet | 32 vdc | 2.8 | 5.0 | 3.9" x 6.3" x 9.9" | 3/4" Barb |

FLOJET / JABSCO

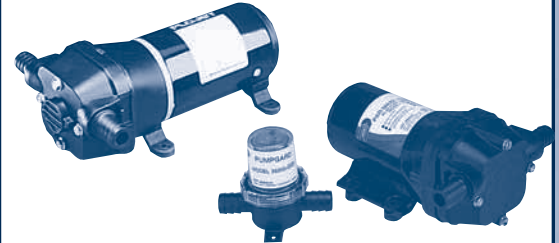

4125-114 / 31705-0092

4 - 4.5 GPM, 12-24-32 VDC BILGE AND SHOWER SUMP

The inexpensive 37202 and 36960 series include many of the dependable features of the classic Jabsco "PAR" pumps displayed below. They are ideally suited for bilge or shower sump installations and come complete with a 3/4" suction strainer. They will prime up to 6 feet and will run dry without damage. See page 155 and 156 for service parts.

| Model Number | Volts | Amps/Fuse Size | Flow GPM | Dimensions (H x W x L) | Port Size |
|---------------|--------|----------------|----------|----------------------------|-----------|
| JA 37202-2012 | 12 vdc | 7.5/10 | 4.5 | 5 3/4" x 5 1/4" x 7 1/2" | 3/4" Barb |
| JA 37202-2024 | 24 vdc | 6.5/10 | | | |
| JA 36960-2000 | 12 vdc | 6/8 | | | |
| JA 36960-2010 | 24 vdc | 5/7 | 4 | 7 1/4" x 4 1/16" x 7 5/16" | 3/4" Barb |
| JA 36960-2020 | 32 vdc | 2/3 | | | |

JABSCO



37202-2012

36960-2000

5 - 10 GPM, 12-24-32 VDC AND 115 VAC BILGE

The classic Jabsco "PAR" diaphragm bilge pumps provide dependable self-priming performance and are designed to run dry without damage. The 34600 and 36600 will self-prime to 10 feet while the 36680 will lift up to 7 feet vertically. See page 156 for service parts.

| Model Number | Volts | Amps/Fuse Size | Flow GPM | Dimensions (H x W x L) | Port Size |
|---------------|---------|----------------|----------|----------------------------|-----------|
| JA 36680-2000 | 12 vdc | 7/10 | | | |
| JA 36680-2010 | 24 vdc | 5/6 | 5.5 | 8 1/2" x 6 1/2" x 7 5/8" | 3/4" Barb |
| JA 36680-2020 | 32 vdc | 3/4 | | | |
| JA 36600-0000 | 12 vdc | 9/16 | | | |
| JA 36600-0010 | 24 vdc | 8 | 8.0 | 8 1/4" x 5 7/8" x 8 5/8" | 3/4" Barb |
| JA 36600-0020 | 32 vdc | 3/5 | | | |
| JA 36600-0031 | 115 vac | 0.9/1.5 | | | |
| JA 34600-0000 | 12 vdc | 11/15 | | | |
| JA 34600-0010 | 24 vdc | 5/8 | 10.8 | 10 1/2" x 8 5/8" x 9 3/16" | 1" Barb |
| JA 34600-0020 | 32 vdc | 4/5 | | | |
| JA 34600-0031 | 115 vac | 1.1/1.5 | | | |

JABSCO



36680-2000

34600-0000

36600-0000

5.8 GPM, 12 OR 24 VDC, BILGE AND BAITWELL

The Whale Gulper High Flow is a versatile, quiet-running pump that can self-prime up to 10 ft. The non-clog design can pump a mixture of air and water and will run dry without damage. Multi-direction head allows for easy installation. Meets ISO 15083 standards for vessels up to 39 feet.

| Model Number | Volts | Amps | GPM | Dimensions (H x W x L) | Port Size |
|--------------|--------|------|-----|----------------------------|-----------|
| WH BP3552B | 12 vdc | 6 | 5.8 | 4 3/4" x 11 1/2" x 11 1/2" | 1" |
| WH BP3554B | 24 vdc | 3 | 5.8 | 4 3/4" x 11 1/2" x 11 1/2" | 1" |

WHALE



Gulper High Flow