

# MOTORIZED FLEXIBLE IMPELLER

CONTENTS

## 1-10 GPM, COMPACT SIZES, IN AC AND DC VOLTAGES

The 236XX series is the latest generation of Jabsco's self-priming bronze Puppy pumps utilizing fewer wearing parts. This series comes standard with Nitrile impeller and ignition protected motors. The 12210-0001 comes with a 6 foot cord and is especially compact for a 115 vac pump requiring a mounting envelope of only 3 5/8" high, 4" wide x 6 7/8" long.

ENGINE COOLING


INDEX

HOME

NEXT

BACK

Model Number	Volts	Amps	Max GPM	GPM at Feet of Head			Port Sizes
				6	13	20	
23620-4003	12 vdc	5	1.5	1.5	1.3	1.1	3/4" Barb
23620-4103	24 vdc	2.5	1.5	1.5	1.3	1.1	3/4" Barb
23670-4003	12 vdc	13	3.4	3.0	2.5	1.9	3/4" Barb
23670-4103	24 vdc	7	3.4	3.0	2.5	1.9	3/4" Barb
23610-3003	12 vdc	21	10	10	9	8.4	1" Barb
12210-0001	115 vac	-	3.4	3.4	3.2	2.9	3/4" Barb

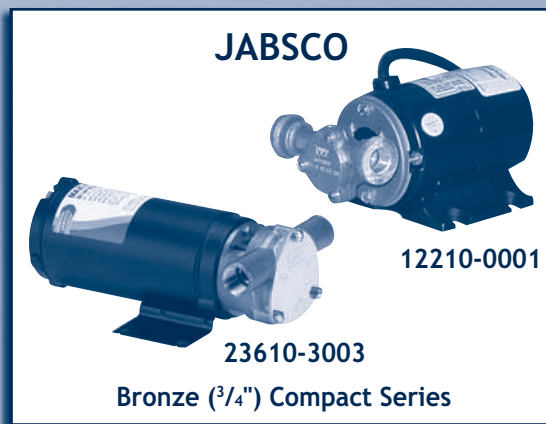

## 5 - 7 GPM, COMPACT SIZES, IN AC AND DC VOLTAGES

This series of Jabsco self-priming bronze pumps have been the workhorses of the industry for over 40 years. Originally referred to as the Water Puppy (DC bronze series) and Sturdy Puppy (AC bronze series), these rugged medium flow pumps will lift 4 feet vertically and maintain a prime of up to 15 feet. See page 151 for service parts.

Model Number	Pump Body Construction	Volts	Amps	Max GPM	GPM at Feet of Head			Port Sizes
					10	20	30	
JA 18660-0121	Bronze	12 vdc	8	5.3	5.3	4.2	2.8	1/2" FPT and 3/4" GHT
JA 18670-0123	Bronze	12 vdc	10.5	7.3	7.3	6.8	5.8	1/2" FPT and 3/4" GHT
JA 18670-0943	Bronze	24 vdc	6	7.3	7.3	6.8	5.8	1/2" FPT and 3/4" GHT
JA 18610-0001	Bronze	115 vac	-	6.5	5.8	5.4	4.8	1/2" FPT and 3/4" GHT
JA 12560-0001	Plastic	12 vdc	7	5.0	4.6	3.7	1.7	5/8" Slip-on Hose
JA 12290-0001	Plastic	115 vac	-	5.8	5.8	5.0	3.8	5/8" Slip-on Hose



## 5 - 11 GPM, 1/2 HP, IN AC AND DC VOLTAGES

The Jabsco 11810 series comes in AC and DC voltages, will lift up to 10 feet and maintain a prime of up to 20 feet. Their solid brass housings are externally threaded for 3/4" male garden hose thread and internally for 1/2" FPT. These pumps are often used in bilge, washdown and general transfer applications. See page 151 for service parts.

Model Number	Motor Enclosure	Volts	Amps	Max GPM	GPM at Feet of Head			Port Sizes
					10	20	30	
JA 11810-0003	Open	115 vac	-	9.5	9.5	8.1	6.8	1/2" FPT and 3/4" GHT
JA 11810-0013	Enclosed	115 vac	-	9.5	9.5	8.1	6.8	1/2" FPT and 3/4" GHT
JA 11810-0121	Enclosed	12 vdc	28	11.2	11.2	10.5	9.4	1/2" FPT and 3/4" GHT
JA 11810-0241	Enclosed	24 vdc	14	11.2	11.2	10.5	9.4	1/2" FPT and 3/4" GHT



## 15 - 23 GPM, 3/4 HP, IN 115 VOLTS AC

The 6050 series pumps by Jabsco is their highest volume close-coupled pump moving up to 23 gpm, lifting water up to 10 feet and maintaining a prime of up to 22 feet! They are available with an open drip-proof or totally enclosed fan cooled motor. An optional vacuum switch can be installed to prevent dry running impeller damage. See page 151 for service parts.

Model Number	Motor Enclosure	Volts	Max GPM	GPM at Feet of Head				Port Sizes
				10	20	30	60	
JA 6050-0003	Open	115 vac	23.0	23.0	22.0	19.5	15.5	1" FPT
JA 6050-0013	Enclosed	115 vac	23.0	23.0	22.0	19.5	15.5	1" FPT

