

# SELF-PRIMING CENTRIFUGALS

**CONTENTS**

**ENGINE COOLING**

**INDEX**


**HOME**

**NEXT**


**BACK**

## UP TO 160 GPM, 95' TDH

- Temperatures to 300°F
- Self-priming to 25 ft.
- Will pass solids up to 9/16"
- Viton® mechanical seal standard, EPDM or Teflon® available, double seal options
- Construction: cast iron, bronze or aluminum wet ends
- Flomax 8 available in 316SS
- Drive Options: include electric close-coupled, pedestal mount, hydraulic, electric or manual clutch, and gas/diesel engine drive

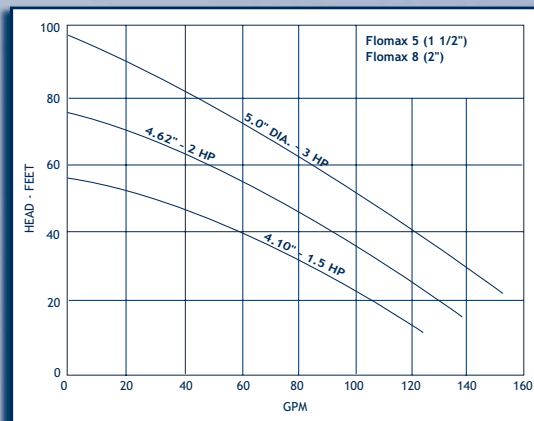


## MP FLOMAX

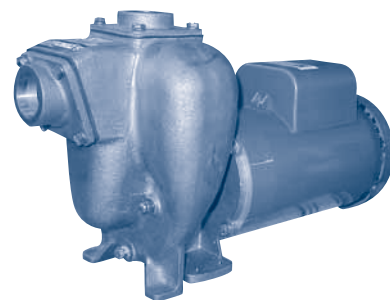


1 1/2" or 2" Cast Iron, Brz. or Alum.

## UP TO 300 GPM, 130' TDH

- Temperatures to 300°F
- Self-priming to 25 ft.
- Will pass solids up to 5/8"
- Viton® mechanical seal standard, EPDM or Teflon® available
- Construction: cast iron, bronze or aluminum wet ends
- Drive Options: include electric close-coupled, pedestal mount, hydraulic, electric or manual clutch, and gas/diesel engine drive

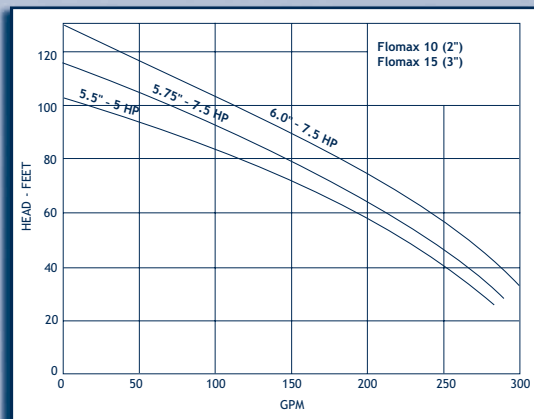


## MP FLOMAX

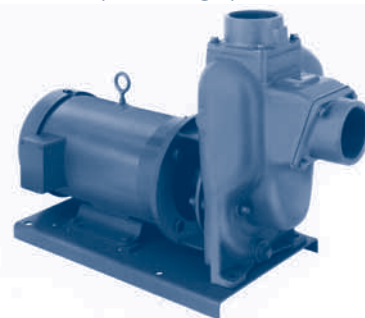


2" or 3" Cast Iron, Brz. or Alum.

## UP TO 480 GPM, 170' TDH

- Temperatures to 300°F
- Self-priming to 25 ft.
- Will pass solids up to 5/8"
- Self-priming to 25 ft.
- Construction: cast iron or bronze
- Fully open impeller
- Drive Options: include electric close coupled, pedestal mount, and gas/diesel engine drive

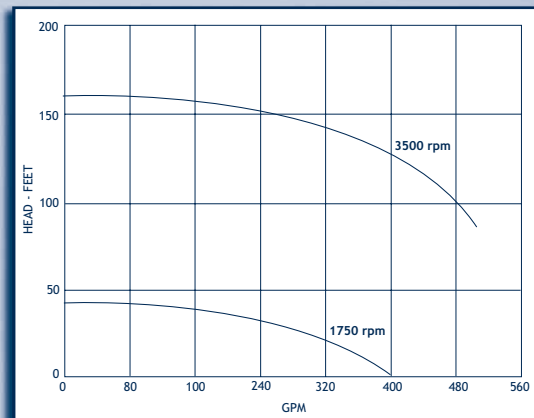


## MP FLOMAX 30




3" Cast Iron or Bronze

## UP TO 150 GPM, 190' TDH

- Temperatures to 300°F
- Self-priming to 25 ft.
- Will pass solids up to 1/4"
- Viton® mechanical seal standard
- Construction: cast iron or bronze
- 1 1/2" x 1 1/2" or 2" x 2" sizes
- Drive Options: Include electric close coupled, pedestal mount, hydraulic, electric or manual clutch and gas/diesel engine drive

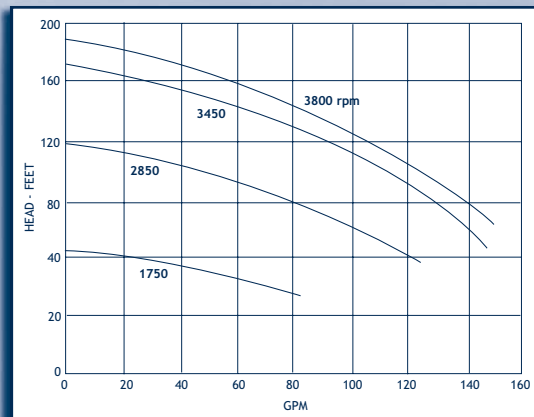

## MP HHLF

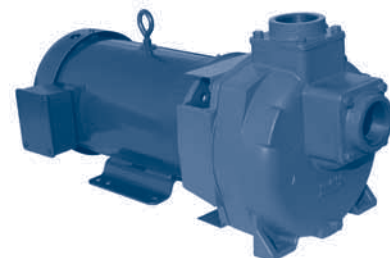

1 1/2" or 2" Cast Iron or Bronze