



SPECIALTY CENTRIFUGALS

OBERDORFER

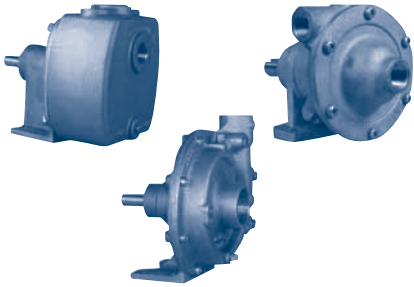

Shaft Driven Series

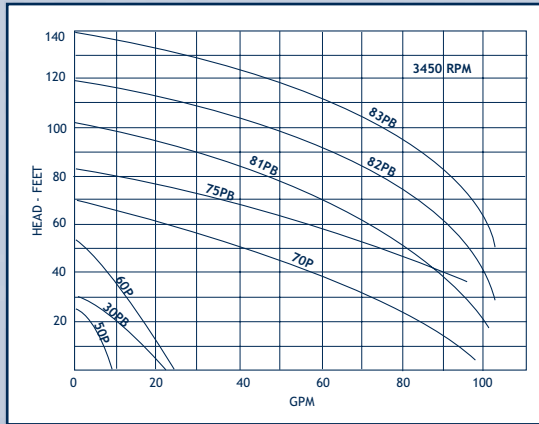

UP TO 100 GPM, 130 TDH

- Temperatures to 300°F
- Bronze construction
- Seal Options: Buna or Viton® mechanical seal
- Drive Options: pulley or coupling driven
- OB 30PB and OB 75PB are self-priming models

CONTENTS

ENGINE COOLING


INDEX

HOME

NEXT

BACK

MP

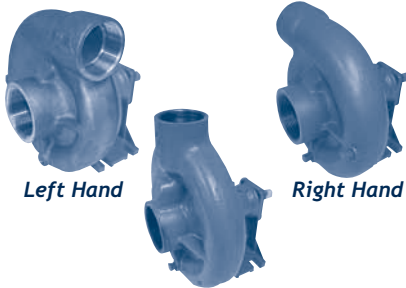


Left Hand

Right Hand

Reversible

30, 110, 130 and 200 Series

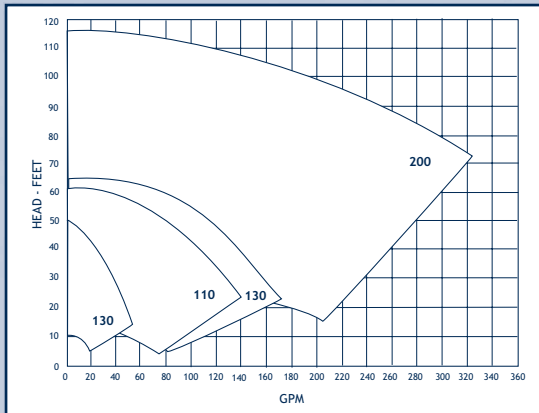


UP TO 320 GPM, 115 TDH

- Temperatures to 300°F
- Semi-open impeller
- Construction: cast iron or bronze
- Seal Options: Viton® or packing
- Drive Options: pulley, clutch or electric motor

AMT



2" Dredging Pump

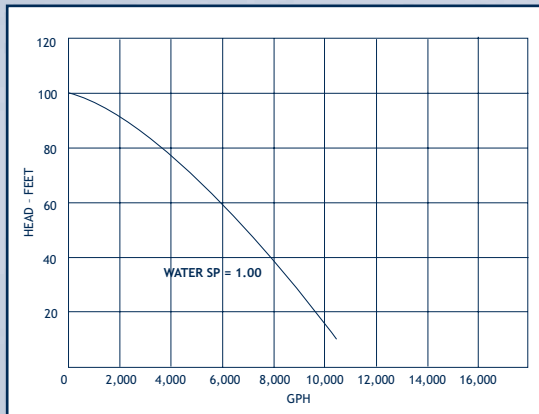


UP TO 173 GPM, 100 TDH

- Temperatures to 160°F
- Self-priming to 20 feet
- Handles up to 1/2" solids, 25% sand
- Construction: cast iron casing and adaptor with high chromium stainless steel internal components
- Seal Options: silicon carbide/Buna mechanical seal
- Drive Options: 5.5 hp Honda OHV engine with oil alert (pedestal version available for electric or belt drive)

GOULDS G & L



SSV Multi-Stage Centrifugal

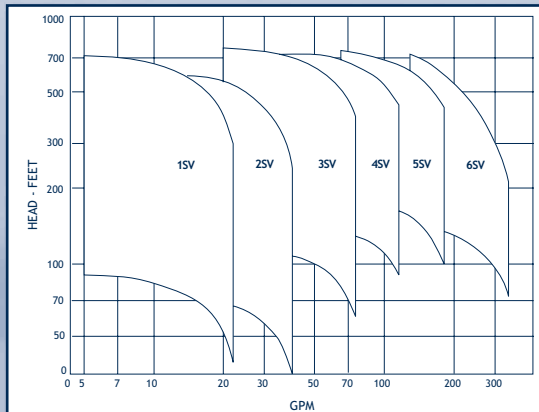

UP TO 317 GPM, 1300 TDH

- Temperatures to 250°F
- Multi-staged enclosed impellers
- Construction: 304 or 316L stainless steel
- Seal Options: carbon/ceramic or silicon carbide/silicon carbide mechanical seal
- Drive Options: single and three phase, ODP, TEFC, explosion proof and custom configurations