


SPECIALTY CENTRIFUGALS

UP TO 173 GPM, 100 TDH

- Temperatures to 160° F
- Self-priming to 20 feet
- Handles up to 1/2" solids, 25% sand
- Construction: Cast Iron casing and adapter with high Chromium Stainless Steel internal components
- Elastomers: Silicon Carbide/Buna mechanical seal
- Drive Options: 5.5 HP Honda OHV engine with oil alert (pedestal version available for electric or belt drive)

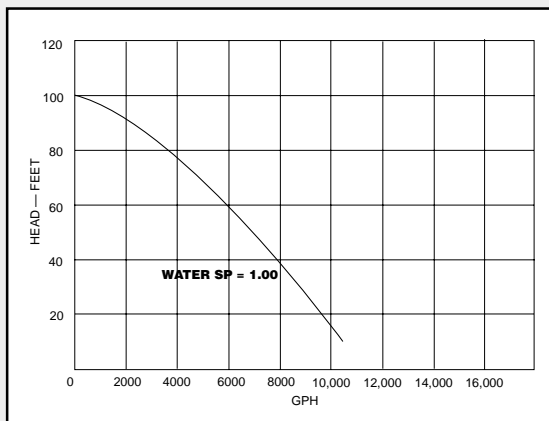


AMT (Dredging Pump)



UP TO 8.5 GPM, 400 TDH

- Temperatures to 160° F
- Multi-staged enclosed impellers
- Maximum inlet pressure: 75 PSI
- Construction: Cast Iron, Brass, Stainless and Thermoplastic

| Model | With PNS Nozzle |
|-------|------------------|
| J50 | 6.5 gpm @ 95 PSI |
| J75 | 7 gpm @ 114 PSI |

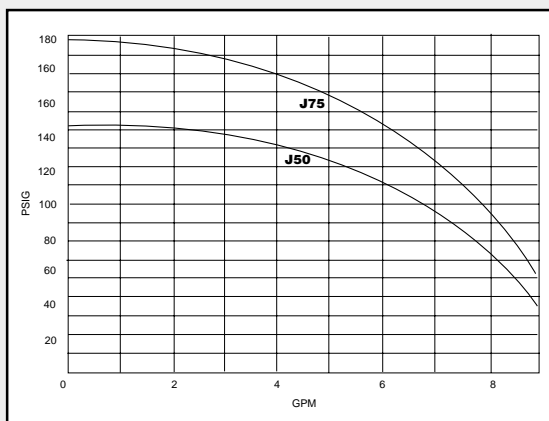


LANCASTER'S WATER BROOM



Multi-Stage Centrifugal

UP TO 250 GPM, 240 TDH

- Temperatures to 200° F
- Self-priming to 25 feet
- Side channel impeller
- Construction: leaded gunmetal housing, Aluminum Bronze ports, hardened Nickel Bronze impeller
- Nitrile mechanical seal
- Drive Options: pedestal mount, manual clutch and electric motor drive in multiple voltages and enclosures

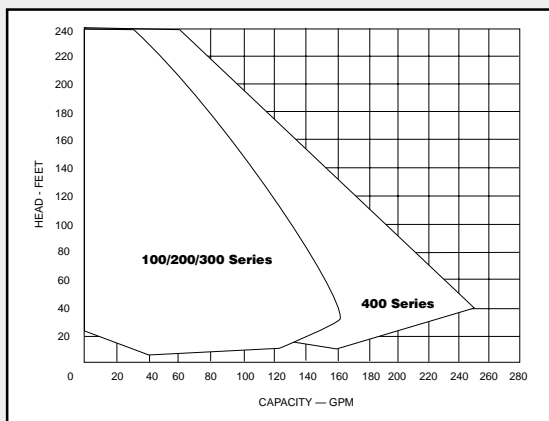

GILKES (Self Primers)



High Head Side Channel

UP TO 240 GPM, 120 TDH


- Temperatures to 180° F
- Open impeller
- Self-priming to 25 feet
- Construction: glass filled Thermoplastic
- Elastomer Options: Buna, EPDM and Viton
- Drive Options: pedestal mount, gas or diesel engine drive, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof and custom configurations

| Engine Drive Series | Port Size | HP | GPM @ Feet of Head | | | | | Max Head |
|---------------------|-----------|---------|--------------------|-----|-----|-----|-----|----------|
| | | | 10 | 20 | 40 | 60 | 80 | |
| DP 900G | 2" | 3.5 - 4 | 147 | 141 | 129 | 100 | 60 | 102 |
| DP 910G | 2" | 5 - 5.5 | 189 | 183 | 172 | 145 | 108 | 120 |
| DP 930G | 3" | 5 - 5.5 | 240 | 240 | 188 | 120 | 40 | 87 |
| DP 940G | 3" | 7 | 225 | 225 | 210 | 174 | 132 | 120 |

| Electric Drive Series | Port Size | HP | GPM @ Feet of Head | | | | | Max Head |
|-----------------------|-----------|----|--------------------|-----|-----|-----|----|----------|
| | | | 0 | 10 | 20 | 40 | 60 | |
| DP 900C | 2" | 2 | 130 | 125 | 107 | 66 | 15 | 65 |
| DP 900D | 2" | 3 | 145 | 145 | 140 | 115 | 82 | 102 |

ENGINE OPTIONS: BRIGGS, HONDA OR YANMAR

ECONOMICAL SELF-PRIMERS

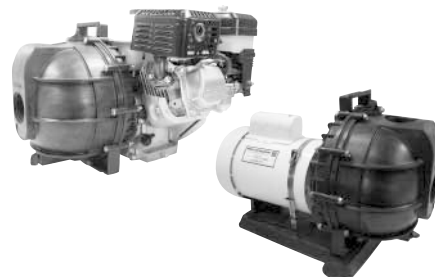

2" or 3" ports, engine or electric