



**SHURFLO**

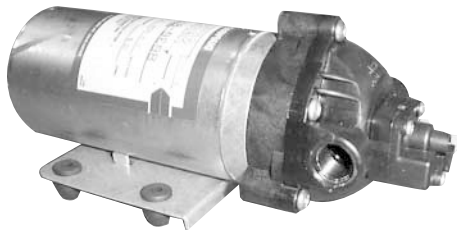

**8000 Series (2 gpm, 60-150 psi)**

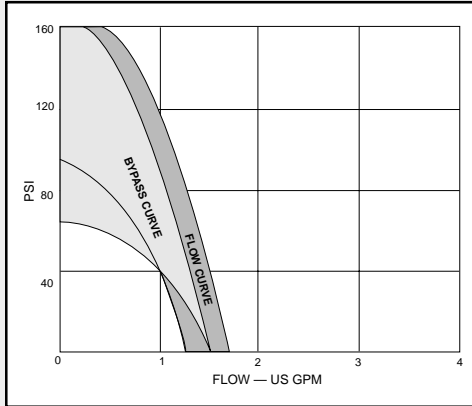

**UP TO 2 GPM,  
IN AC & DC VOLTAGES**

- Up to 150 PSI demand switch or by-pass
- Temperatures to 180° F
- Self-priming to 8 feet
- Ports: 3/8" FPT or 1/2" MPT
- NSF approved models available
- Wetted parts  
Housing: Polypropylene or Nylon  
Diaphragm/valves: Santoprene, Viton, EPDM or Buna  
Metal: Stainless Steel on some models


MODEL NUMBER	VOLTAGE	NSF RATED	DIAPHRAGM/VALVE MATERIAL	MAX GPM	PRESSURE SWITCH	BY-PASS	PORT SIZE
SF 8000-533-236	115 vac	-	Santoprene/Viton	1.4	60 PSI	No	3/8" FPT
SF 8000-533-250	115 vac	-	Santoprene/Viton	1.4	No	45 PSI	3/8" FPT
SF 8000-933-250	115 vac	-	Santoprene/EPDM	1.4	No	45 PSI	3/8" FPT
SF 8005-233-236	115 vac	NSF	Santoprene/EPDM	1.5	60 PSI	No	3/8" FPT
SF 8005-733-255	115 vac	NSF	Santoprene/EPDM	1.5	60 PSI	Yes	3/8" FPT
SF 8000-713-238	115 vac	-	Santoprene/EPDM	1.5	100 PSI	No	3/8" FPT
SF 8000-812-288	115 vac	-	Santoprene/Viton	1.3	100 PSI	Yes	3/8" FPT
SF 8000-912-288	115 vac	-	Santoprene/EPDM	1.4	100 PSI	Yes	3/8" FPT
SF 8000-813-238	115 vac	-	Santoprene/Viton	1.5	100 PSI	No	3/8" FPT
SF 8030-869-239	115 vac	-	Santoprene/Viton	1.5	150 PSI	No	3/8" FPT
SF 8035-963-239	115 vac	-	Santoprene/EPDM	1.3	150 PSI	No	3/8" FPT
SF 8090-212-246	230 vac	-	Santoprene/EPDM	1.2	60 PSI	No	3/8" FPT
SF 8090-902-248	230 vac	-	Santoprene/EPDM	1.2	100 PSI	No	3/8" FPT
SF 8090-901-247	230 vac	-	Santoprene/EPDM	1.4	100 PSI	Yes	3/8" FPT
SF 8000-443-236	12 vdc	-	Santoprene/EPDM	1.7	60 PSI	No	3/8" FPT
SF 8000-543-250	12 vdc	-	Santoprene/Viton	1.4	No	45 PSI	3/8" FPT
SF 8000-643-250	12 vdc	-	Geolast/Buna	1.5	60 PSI	No	3/8" FPT
SF 8000-543-236	12 vdc	-	Santoprene/Viton	1.4	60 PSI	No	3/8" FPT
SF 8000-543-238	12 vdc	-	Santoprene/Viton	1.6	100 PSI	No	3/8" FPT
SF 8002-793-238	12 vdc	-	Santoprene/EPDM	1.7	100 PSI	No	3/8" FPT
SF 8030-813-239	12 vdc	-	Santoprene/Viton	1.5	150 PSI	-	-

\*Additional voltage, elastomer and flow combinations available.

**SHURFLO**



**2088 Series (4 gpm, 45 psi)**

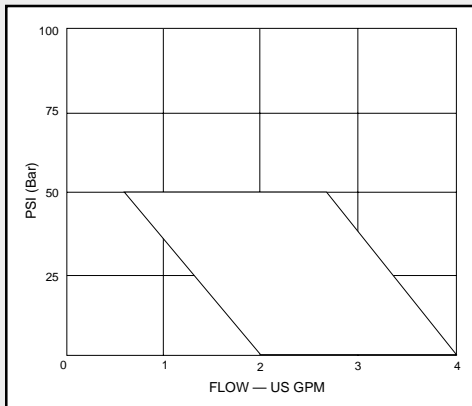

**UP TO 4 GPM,  
IN AC & DC VOLTAGES**

- Up to 45 PSI demand switch or by-pass
- Temperatures to 170° F
- Self-priming to 12 feet
- Ports: 1/2" MPT
- NSF approved models available
- Wetted parts  
Housing: Polypropylene  
Diaphragm/valves: Santoprene, Viton or Buna  
Metal: Stainless Steel on some models

MODEL NUMBER	VOLTAGE	NSF RATED	DIAPHRAGM/VALVE MATERIAL	MAX GPM	PRESSURE SWITCH	BY-PASS	PORT SIZE
SF 2088-394-154	115 vac	-	Santoprene/Viton	3.2	45 PSI	No	1/2" MPT
SF 2088-594-154	115 vac	NSF	Santoprene/Santoprene	3.3	45 PSI	No	1/2" MPT
SF 2088-443-144	12 vdc	-	Santoprene/Santoprene	3.0	45 PSI	No	1/2" MPT
SF 2088-343-135	12 vdc	-	Santoprene/Viton	3.0	45 PSI	No	1/2" MPT
SF 2088-514-145	12 vdc	-	Santoprene/Santoprene	3.4	45 PSI	No	1/2" MPT
SF 2088-554-444	12 vdc	NSF	Santoprene/Santoprene	3.5	45 PSI	No	1/2" MPT
SF 2088-313-145	12 vdc	-	Santoprene/Viton	3.6	45 PSI	No	1/2" MPT
SF 2088-474-144	24 vdc	NSF	Santoprene/Santoprene	3.0	45 PSI	No	1/2" MPT

\*Additional voltage, elastomer and flow combinations available.

**FOR ENGINEERING AND PUMP SELECTION ASSISTANCE CALL DEPCO AT 1-800-446-1656**