

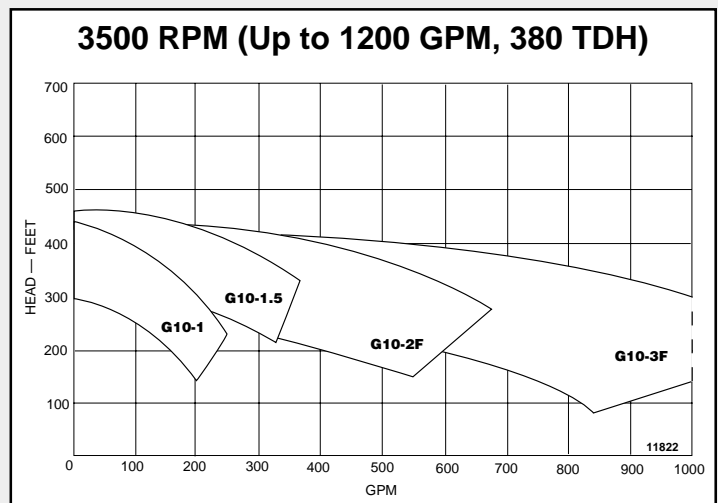
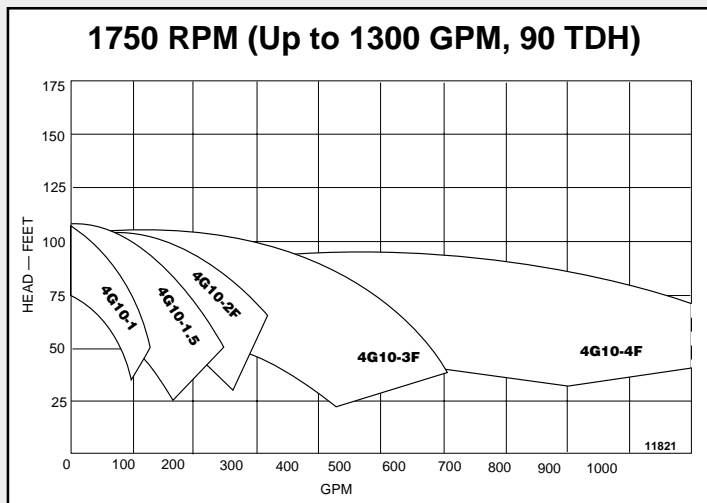


Burks G series pumps come standard in bronze fitted cast iron construction. All bronze or all iron configurations are also available. Flanged casings are available on 2" and 2 1/2" pumps, 3" and above are only available flanged. The maximum working temperature is 225° F. However, with the optional "MJ" jacketed seal, temperatures of up to 500° F are possible (not available in all sizes). This special cooling jacket surrounds the seal cavity, permitting cooling liquid to circulate and eliminates the need for exotic shaft seals.

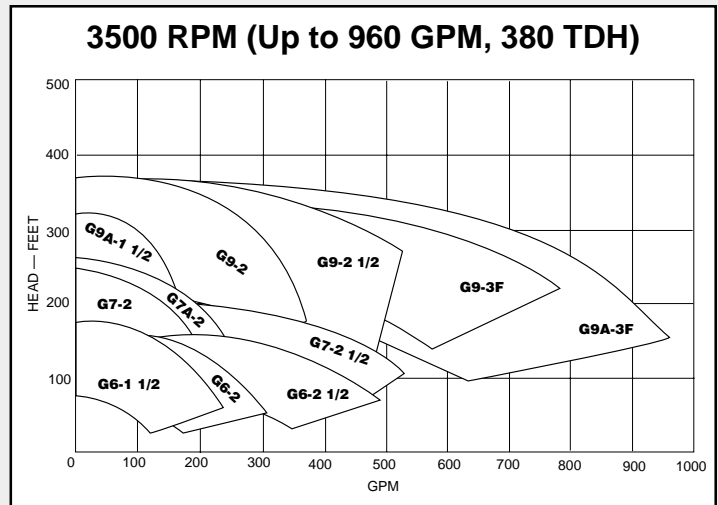

**UP TO 1300 GPM,
380 TDH**

- Temperatures to 225° F (500° F with jacket)
- Enclosed impeller
- Housing Construction: Cast Iron Bronze fitted, Bronze and all Iron
- Multiple Seal Options
- Drive Options: pedestal mount, single and 3 phase, ODP, TEFC and explosion proof, custom configurations

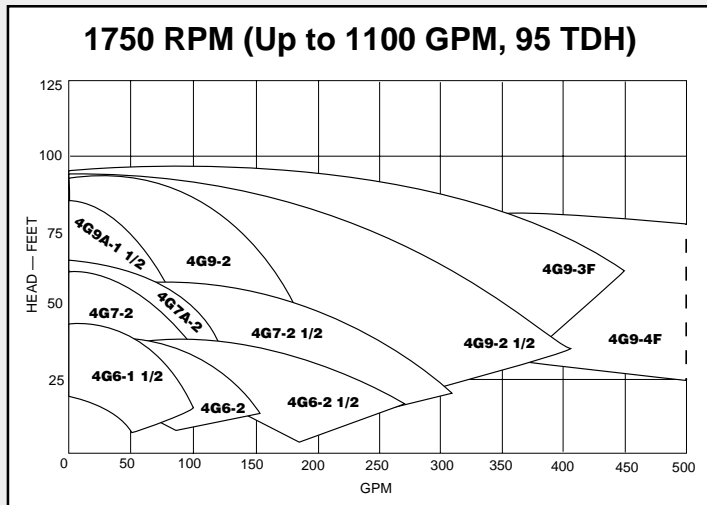

FOR ENGINEERING AND PUMP SELECTION ASSISTANCE CALL DEPCO AT 1-800-446-1656