


# HIGH PRESSURE DIAPHRAGM

## IN AC & DC VOLTAGES

- Up to 2 GPM
- Up to 150 PSI
- Temperatures to 180° F
- Self-priming to 8 feet
- See page 38 for complete model selection
- Flojet and Jabsco diaphragm pump series shown on page 36-41

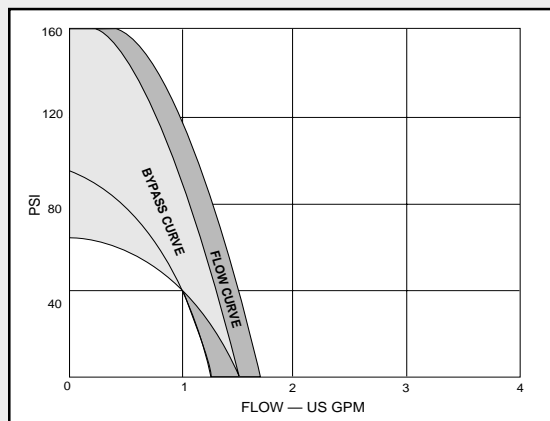

**SHURFLO (8000 Series)**

**Up to 150 PSI, 2 GPM**

## ENGINE OR SHAFT DRIVEN

- Up to 6 GPM
- Up to 290 PSI
- Temperatures to 140° F
- Requires 3 HP engine
- Configuration Options: solid or hollow shaft drive gear reducer
- Recommended control unit: (relief valve and by-pass combo) 9910-Kit 1990

PSI	450 RPM		550 RPM		650 RPM	
	GPM	HP	GPM	HP	GPM	HP
50	4.2	.33	5.1	.43	6	.53
100	4.1	.37	5	.47	5.9	.57
150	4	.4	4.9	.5	5.8	.6
200	3.8	.5	4.7	.6	5.5	.8
290	3.6	.6	4.5	.8	5.3	1

**HYPRO (D19/D252 Series)**

**290 PSI, 6 GPM**

## ENGINE OR SHAFT DRIVEN

- Up to 9.5 GPM
- Up to 580 PSI
- Temperatures to 140° F
- Requires 5 1/2 HP engine
- Configuration Options: solid or hollow shaft drive gear reducer
- Recommended control unit: (relief valve and by-pass combo) 9910-GS40GI

PSI	350 RPM		450 RPM		550 RPM	
	GPM	HP	GPM	HP	GPM	HP
50	6	.4	7.9	.8	9.5	1.6
100	5.9	.9	7.8	1.3	9.3	2
200	5.7	1.3	7.5	1.8	9.1	2.5
300	5.5	1.6	7.4	2.2	9	2.8
400	5.3	2.2	7.1	2.8	8.7	3.6
580	5	2.7	6.9	3.4	8.45	4.2

**HYPRO (D30 Series)**

**580 PSI, 9.5 GPM**

## ENGINE OR SHAFT DRIVEN

- Up to 14 GPM
- Up to 580 PSI
- Temperatures to 140° F
- Requires 8 HP engine
- Configuration Options: solid or hollow shaft drive gear reducer
- Recommended control unit: (relief valve and by-pass combo) 9910-GS40GI

PSI	350 RPM		450 RPM		550 RPM	
	GPM	HP	GPM	HP	GPM	HP
50	9.5	.6	11.9	1	14	1.5
100	9.3	1	11.7	1.6	13.8	2
200	9.1	1.6	11.5	2.3	13.6	3
300	9	2	11.4	2.8	13.5	3.5
400	8.7	2.7	11	3.5	13.2	4.5
580	8.45	3.5	10.8	4.5	12.7	6.5

**HYPRO (D50 Series)**

**580 PSI, 14 GPM**