


CAST IRON GEAR PUMPS


CONTENTS UP TO 5 GPM, 150 PSI

- INDEX**
- NEXT**
- BACK**
- HOME**
- Temperatures to 650° F
- Lubricating or non-lubricating liquids
- High viscosities handled at direct drive motor speeds
- Ductile iron body, several rotor and bushing material choices
- Lip seal, mechanical seal or packing
- Close coupled or foot mounting options

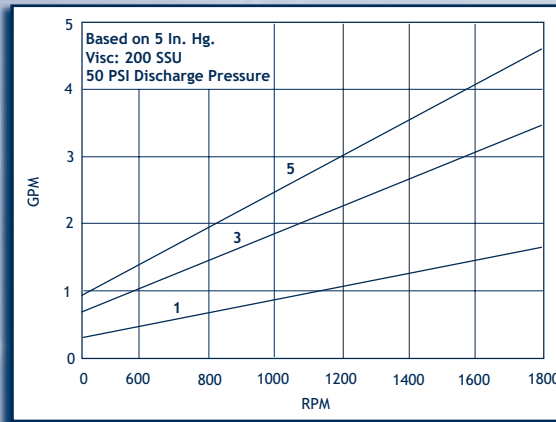



UP TO 8 GPM, 150 PSI

- Temperatures to 650° F
- Lubricating or non-lubricating liquids
- High viscosities handled at direct drive motor speeds
- Ductile iron body, several rotor and bushing material choices
- Lip seal, mechanical seal or packing
- Close coupled or foot mounting options

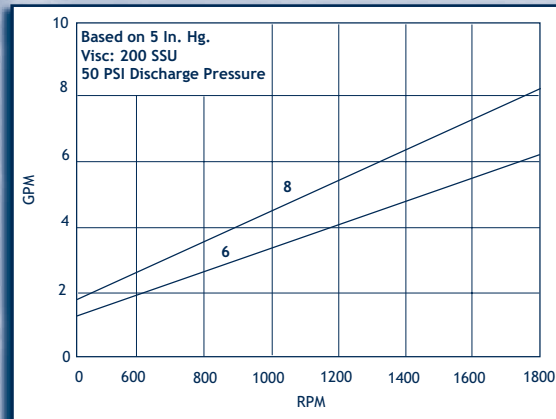

UP TO 40 GPM, 150 PSI

- Temperatures to 650° F
- Lubricating or non-lubricating liquids
- High viscosities handled at direct drive motor speeds
- 316SS available on 10, 15 and 20
- Ductile iron body, several rotor and bushing material choices
- Lip seal, mech. seal or packing
- Close coupled or foot mounting options

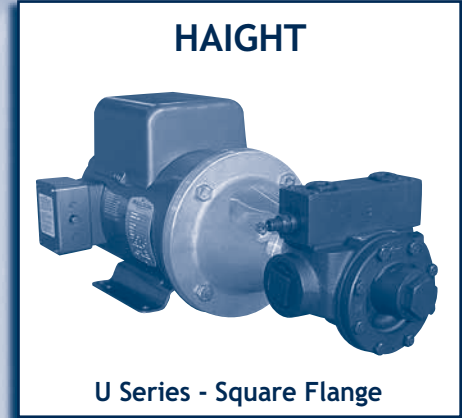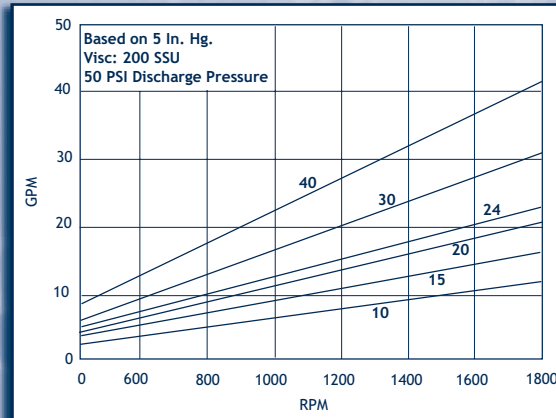

UP TO 80 GPM, 150 PSI

- Temperatures to 650° F
- Lubricating or non-lubricating liquids
- High viscosities handled at direct drive motor speeds
- Ductile iron body, several rotor and bushing material choices
- Lip seal, mechanical seal or packing
- Close coupled or foot mounting options

