


# AIR OPERATED DIAPHRAGM PUMPS

## FLOJET



5100 Series

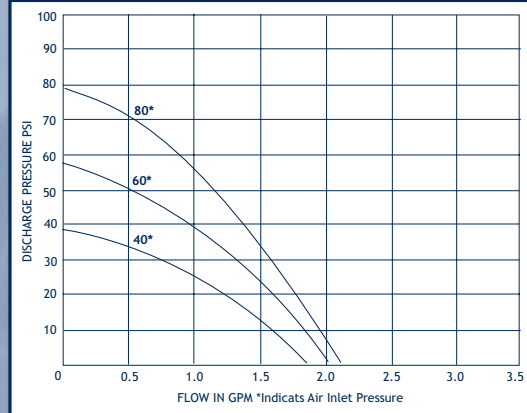

## UP TO 2 GPM, 80 PSI

- Dry primes to 28' (dry) and up to 32' when wet
- Will safely handle flammable liquids
- Several elastomer options
- Air or CO<sub>2</sub> powered
- Very compact design
- Infinitely variable capacity control from zero to maximum flow

CONTENTS

INDEX

NEXT


BACK

HOME

## FLOJET




G57 Series

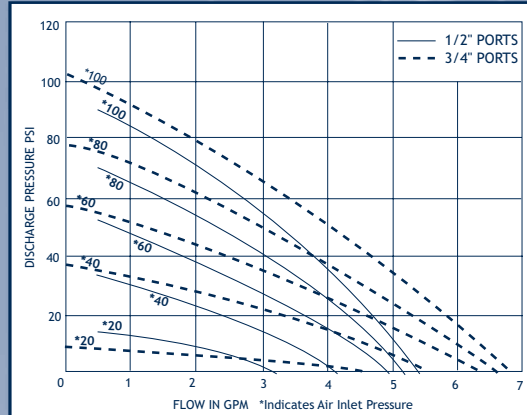


## UP TO 6.5 GPM, 100 PSI

- Dry primes to 15', 20' when wet
- Santoprene or Viton® elastomers, Polypropylene body
- Stall-free shuttle valve
- Sanitary design (with Santoprene)
- Quick disconnect port fittings
- Air or CO<sub>2</sub> powered
- Very compact design

## FLOJET

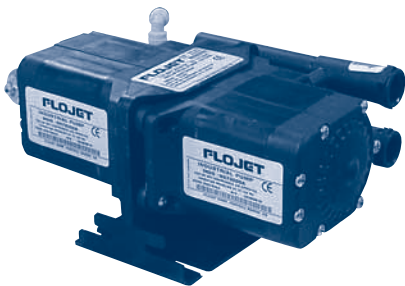


G257XXX Series

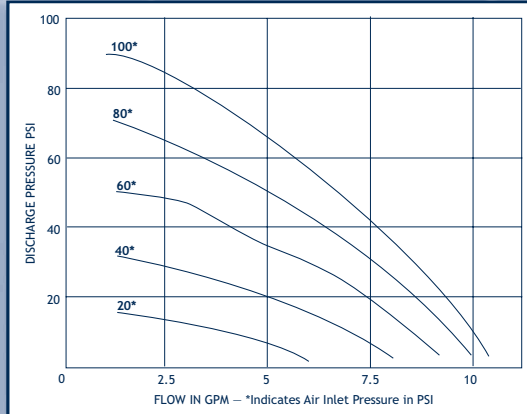


## UP TO 10.5 GPM, 90 PSI

- Dry primes to 15', 20' when wet
- Santoprene or Viton® elastomers, Polypropylene body
- Stall-free shuttle valve
- Sanitary design (with Santoprene)
- Quick disconnect port fittings
- Air or CO<sub>2</sub> powered
- Very compact design
- Duplex manifolded G57 pump

## FLOJET

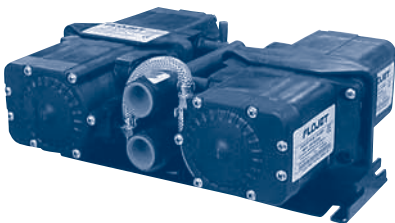

G457XXX Series

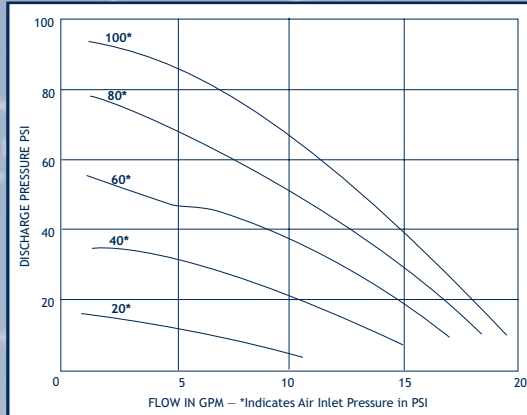

## UP TO 19 GPM, 90 PSI

- Dry primes to 15', 20' when wet
- Santoprene or Viton® elastomers, Polypropylene body
- Stall-free shuttle valve
- Sanitary design (with Santoprene)
- Quick disconnect port fittings
- Air or CO<sub>2</sub> powered
- Very compact design
- Quad manifolded G57 pump