


CONTENTS UP TO 50 GPM, 200 PSI


- INDEX**
- NEXT**
- BACK**
- HOME**

- 200 psi on 3005 series, 60 psi on 2000 series
- Temperatures to 210°F
- Viscosities to 15,000 cps
- Solids to 35%, 1/8" diameter
- Hose Options: Neoprene, Hypalon, varprene, silicone, PharMed, natural rubber, nitrile rubber, EPDM
- Does not require hose lubricant
- Fibers to 1/2" length

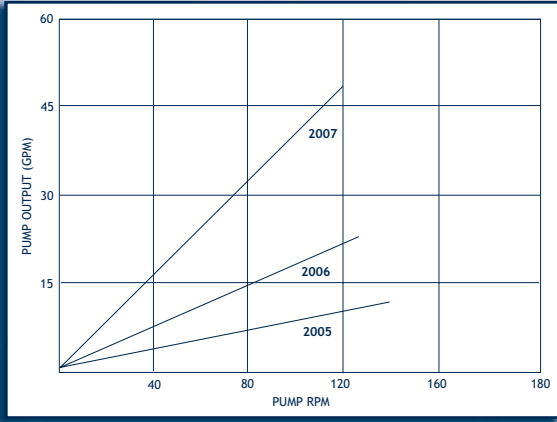


UP TO 4 GPM, 60 PSI

- Temperatures to 210°F
- Viscosities to 15,000 cps
- Solids to 35%, 1/16" diameter
- Hose Options: Neoprene, Hypalon, varprene, silicone, PharMed, natural rubber, Nitrile rubber, EPDM
- Does not require hose lubricant
- Fibers to 1/4" length

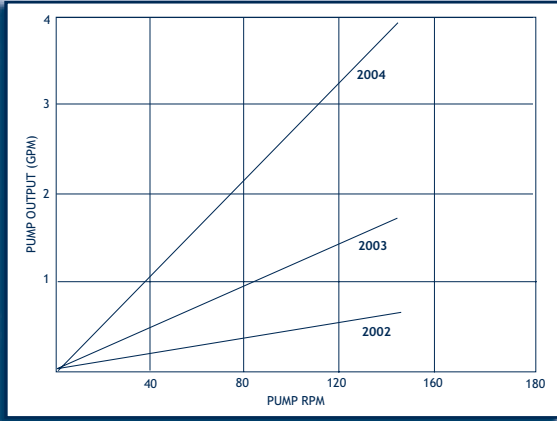

UP TO 260 GPM, 116 PSI

- Temperatures to 180°F
- Viscosities to 100,000 SSU
- Solids to 2 1/2" diameter
- Fibers to 36" in length
- Hose Options: steel braided, natural rubber and Neoprene rubber
- 22' suction lift

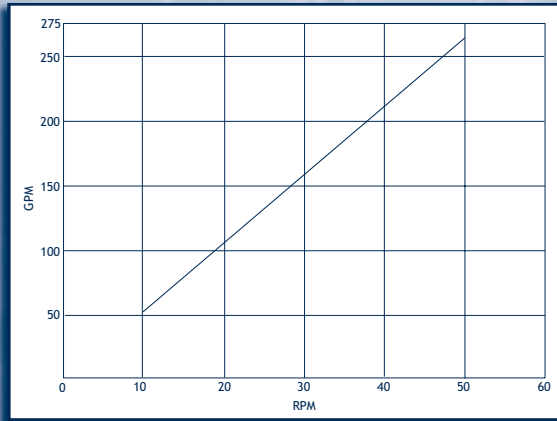

UP TO 88 GPM, 150 PSI

- Temperatures to 230°F
- Handles liquids and slurries up to 75% solid content
- Unique operating principal delivers 50% more per revolution than conventional peristaltic pumps
- Compact size saves on floor space
- Optional accessories: variable speed control, hose leak detector, revolution counter, and remote control

