

CONTENTS

INDEX


NEXT

BACK

HOME

UP TO 10 GPM, 50 PSI

- Temperatures to 400° F
- Cast iron housing
- Viton® mechanical seal
- Teflon® rollers
- Available in pedestal mount or close-coupled to a variety of AC, DC, pneumatic or hydraulic drives
- 1/2" or 3/4" female pipe thread ports
- Best priming in this style pump

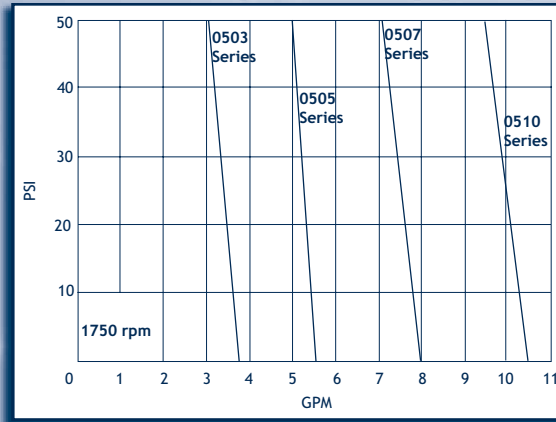


HYPRO



Pedestal and 56C Motor Mount

UP TO 10 GPM, 50 PSI

- Designed specifically to meet NSF requirements for the transfer of hot cooking oil
- Temperatures to 400° F
- Cast iron housing with stainless steel shaft
- Viton® mechanical seal
- Teflon® rollers
- 1/3" or 1/2" HP ODP motor
- 1/2" or 3/4" female pipe thread ports

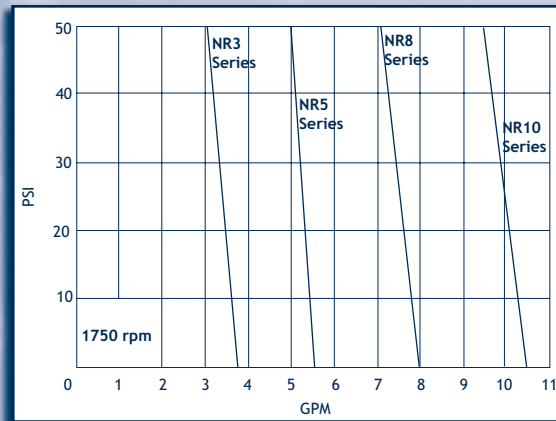


HYPRO




NSF Rated Hot Oil Series

UP TO 9 GPM, 90 PSI

- Temperatures to 140° F
- Cast iron, Ni-resist or "Silver Series" alloy housing with stainless steel shaft
- Rollers available in Poly, Teflon®, Buna or "Super" Chem resistant material
- Shaft seal standard is Viton® lip; Buna or leather lip available as options
- 12 vdc heavy duty motor
- 3/4" female pipe thread ports

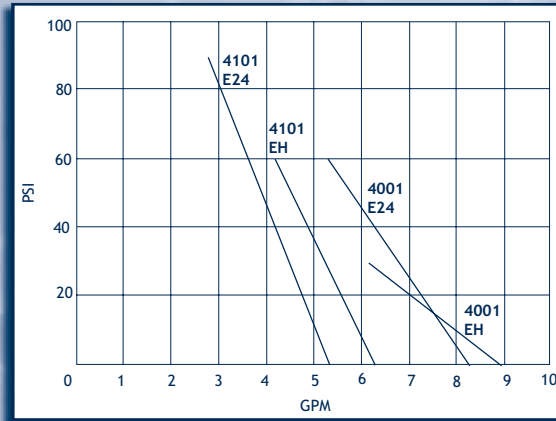


HYPRO

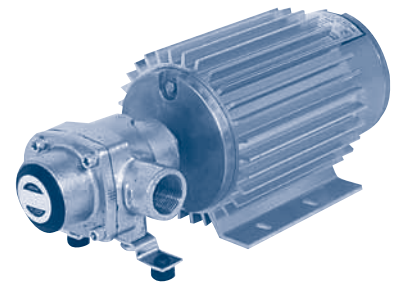

12 vdc Series

UP TO 22 GPM, 300 PSI

- Temperatures to 140° F
- Close-grain cast iron housing with stainless steel shaft
- Rollers available in Nylon or Polypropylene
- Shaft seal available in Viton®, Buna or leather lip
- PTO adapters available in standard and quick coupler versions
- 3/4" female pipe thread ports

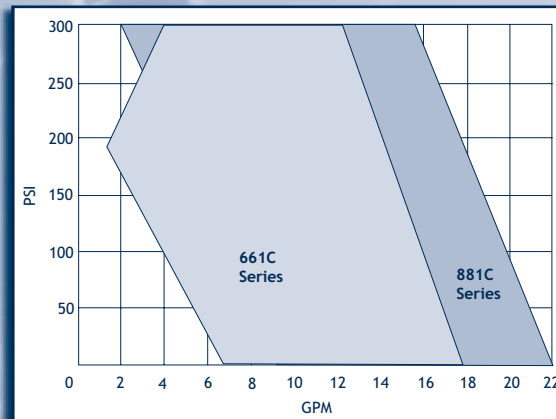

ACE PUMP



PTO Drive Series